

## **PROBLEM SUMMARY**

#### Sample Rating Trend

10112 1-2015 S-2015 1-2018 1-2018 1-2018 1-2018 1-2018 1-2018

ISO




# FRICK TYSWAL HS-9 (S/N TDSH23352032E)

Component

**Refrigeration Compressor** 

**USPI ALT-68 SC (165 GAL)** 

#### **COMPONENT CONDITION SUMMARY**

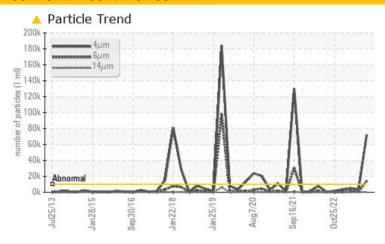

#### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

| PROBLEMATIC TEST F | RESULTS      |           |                 |          |          |
|--------------------|--------------|-----------|-----------------|----------|----------|
| Sample Status      |              |           | ABNORMAL        | NORMAL   | NORMAL   |
| Particles >4µm     | ASTM D7647   | >10000    | <b>72190</b>    | 3744     | 5019     |
| Particles >6µm     | ASTM D7647   | >2500     | <b>13991</b>    | 665      | 1327     |
| Particles >14μm    | ASTM D7647   | >320      | <b>A</b> 331    | 57       | 65       |
| Oil Cleanliness    | ISO 4406 (c) | >20/18/15 | <b>23/21/16</b> | 19/17/13 | 20/18/13 |

Customer Id: TYSWALAR Sample No.: USP0004064 Lab Number: 06030016 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Filter |        |      | ?       | We recommend you service the filters on this component. |

#### HISTORICAL DIAGNOSIS

#### 27 Aug 2023 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 16 May 2023 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

# view report

#### 01 Feb 2023 Diag: Doug Bogart

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

#### Sample Rating Trend



Machine Id

## FRICK TYSWAL HS-9 (S/N TDSH23352032E)

Component

**Refrigeration Compressor** 

**USPI ALT-68 SC (165 GAL)** 

#### **DIAGNOSIS**

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| 2013 Jan2015 Sept2016 Jan2015 Jan2015 Jan2010 Sept2021 Oct2022 |          |                          |               |             |               |               |  |
|--|----------|--------------------------|---------------|-------------|---------------|---------------|--|
| SAMPLE INFORM  | MATION   | method                   | limit/base    | current     | history1      | history2      |  |
| Sample Number  |          | Client Info              |               | USP0004064  | USP0000375    | USP243510     |  |
| Sample Date  |          | Client Info              |               | 06 Dec 2023 | 27 Aug 2023   | 16 May 2023   |  |
| Machine Age  | hrs      | Client Info              |               | 2031        | 1632          | 0             |  |
| Oil Age  | hrs      | Client Info              |               | 0           | 0             | 0             |  |
| Oil Changed  |          | Client Info              |               | N/A         | N/A           | N/A           |  |
| Sample Status  |          |                          |               | ABNORMAL    | NORMAL        | NORMAL        |  |
| WEAR METALS  |          | method                   | limit/base    | current     | history1      | history2      |  |
| Iron   | ppm      | ASTM D5185m              | >8            | 0           | 0             | 0             |  |
| Chromium   | ppm      | ASTM D5185m              | >2            | 0           | 0             | <1            |  |
| Nickel   | ppm      | ASTM D5185m              |               | 0           | 0             | <1            |  |
| Titanium   | ppm      | ASTM D5185m              |               | <1          | 0             | 0             |  |
| Silver   | ppm      | ASTM D5185m              | >2            | 0           | 0             | 0             |  |
| Aluminum   | ppm      | ASTM D5185m              | >3            | 0           | 0             | <1            |  |
| Lead   | ppm      | ASTM D5185m              | >2            | 0           | 0             | 0             |  |
| Copper   | ppm      | ASTM D5185m              | >8            | 0           | 0             | 0             |  |
| Tin  | ppm      | ASTM D5185m              | >4            | 0           | 0             | 0             |  |
| Vanadium   | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Cadmium  | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| ADDITIVES  |          | method                   | limit/base    | current     | history1      | history2      |  |
| Boron  | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Barium   | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Molybdenum   | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Manganese  | ppm      | ASTM D5185m              |               | 0           | 0             | <1            |  |
| Magnesium  | ppm      | ASTM D5185m              |               | 0           | <1            | 0             |  |
| Calcium  | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Phosphorus   | ppm      | ASTM D5185m              |               | 0           | 1             | 0             |  |
| Zinc   | ppm      | ASTM D5185m              |               | 0           | 0             | 0             |  |
| Sulfur   | ppm      | ASTM D5185m              | 50            | 0           | 136           | 180           |  |
| CONTAMINANTS   | ;        | method                   | limit/base    | current     | history1      | history2      |  |
| Silicon  | ppm      | ASTM D5185m              | >15           | 3           | 2             | 1             |  |
| Sodium   | ppm      | ASTM D5185m              |               | 0           | 0             | <1            |  |
|  | nnm      | ASTM D5185m              | >20           | 2           | <1            | <1            |  |
| Potassium  | ppm      |                          |               |             |               |               |  |
| Potassium<br>Water   | %        | ASTM D6304               | >0.01         | 0.002       | 0.003         | 0.009         |  |
|  |          | ASTM D6304<br>ASTM D6304 | >0.01<br>>100 | 0.002<br>22 | 0.003<br>36.6 | 0.009<br>94.4 |  |
| Water  | %<br>ppm |                          |               |             |               |               |  |

ASTM D7647 >2500

ASTM D7647 >80

ASTM D7647 >4

>320

>20/18/15

limit/base

ASTM D7647

ASTM D7647

ISO 4406 (c)

method

mg KOH/g ASTM D974 0.005

**13991** 

331

50

0

23/21/16

0.013

current

Particles >6µm

Particles >14µm

Particles >21µm

Particles >38µm

Particles >71µm

Oil Cleanliness

Acid Number (AN)

**FLUID DEGRADATION** 

0.016

665

57

18

2

0

19/17/13

history1

1327

65

9

0

20/18/13

0.015

history2



### **OIL ANALYSIS REPORT**



Certificate L2367

**Test Package** 

: IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (479)637-2121

F: (479)637-5602

Contact: DANNY HOUSTON

danny.houston@tyson.com