



# OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area  
**1A1**  
 Machine Id  
**17-046S16-6**  
 Component  
**Gearbox**  
 Fluid  
**NOT GIVEN (--- GAL)**



## DIAGNOSIS

### ▲ Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### ▲ Fluid Condition

The AN level is at the top-end of the recommended limit.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0881639</b>	---	---
Sample Date	Client Info	<b>10 Dec 2023</b>	---	---
Machine Age	mls Client Info	<b>0</b>	---	---
Oil Age	mls Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	<b>0</b>	---	---
Chromium ppm ASTM D5185m	>15	<b>0</b>	---	---
Nickel ppm ASTM D5185m	>15	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>25	<b>0</b>	---	---
Lead ppm ASTM D5185m	>100	<b>0</b>	---	---
Copper ppm ASTM D5185m	>200	<b>0</b>	---	---
Tin ppm ASTM D5185m	>25	<b>0</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>355</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m		<b>0</b>	---	---
Calcium ppm ASTM D5185m		<b>28</b>	---	---
Phosphorus ppm ASTM D5185m		<b>1135</b>	---	---
Zinc ppm ASTM D5185m		<b>0</b>	---	---
Sulfur ppm ASTM D5185m		<b>282</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	<b>1</b>	---	---
Sodium ppm ASTM D5185m		<b>0</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>2</b>	---	---
Water % ASTM D6304	>0.2	<b>0.068</b>	---	---
ppm Water ppm ASTM D6304	>2000	<b>684</b>	---	---

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>20000	<b>312</b>	---	---
Particles >6µm ASTM D7647	>5000	<b>85</b>	---	---
Particles >14µm ASTM D7647	>640	<b>5</b>	---	---
Particles >21µm ASTM D7647	>160	<b>0</b>	---	---
Particles >38µm ASTM D7647	>40	<b>0</b>	---	---
Particles >71µm ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>21/19/16	<b>15/14/10</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>▲ 4.57</b>	---	---



# OIL ANALYSIS REPORT

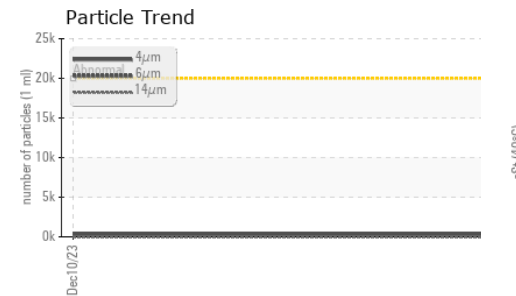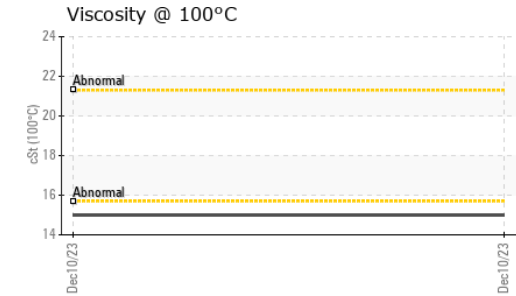
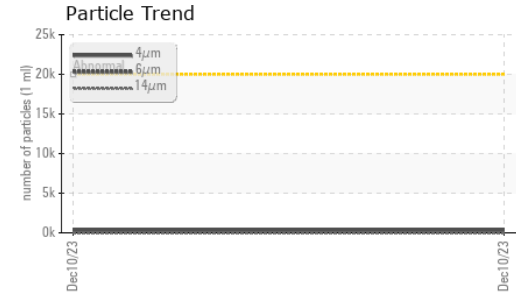
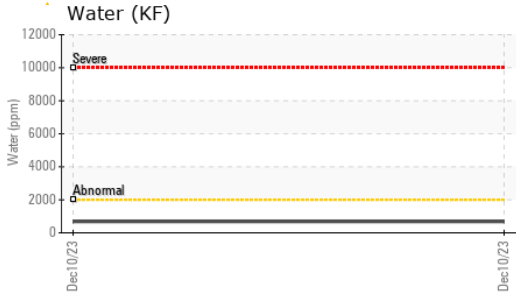


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	97.8	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270	160	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

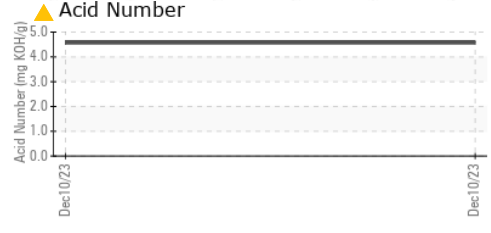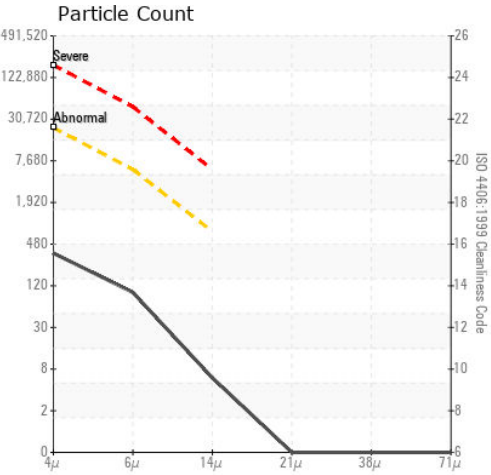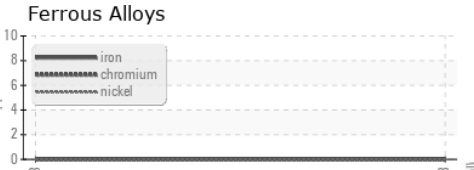

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0881639 **Received** : 08 Dec 2023  
**Lab Number** : 06030024 **Diagnosed** : 15 Dec 2023  
**Unique Number** : 10779815 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PRTCOUNT, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591  
 Contact: GIANNA CREDAROLI  
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)