

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



PAO FLUSH PUMP 0888958

Component

GAL)

Hydraulic System	
{not provided} ((

DIAGNOSIS

Recommendation Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

Discrete particle counts [100 ml] 5-15µm = 3800, $15-25\mu m = 500, 25-50\mu m = 200, 50-100\mu m = 0,$ $>100\mu m = 0$. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

						· ·
				Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0888958		
Sample Number		Client Info		07 Jan 2024		
Machine Age	hrs	Client Info		07 3411 2024		
Oil Age	hrs	Client Info		0		
Oil Age Oil Changed	1115	Client Info		N/A		
Sample Status		Ciletit IIIIO		NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		28		
			P 21/1	-	la ta La mark	h: O
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.002		
ppm Water	ppm	ASTM D6304	>500	24		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>5000	116		
Particles >6μm		ASTM D7647	>1300	45		
Particles >14μm		ASTM D7647	>160	7		
Particles >21μm		ASTM D7647	>40	2		
Particles >38μm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/13/10		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	та КОЦ/а	VCTM D004E		0.044	<u></u>	


Acid Number (AN)

mg KOH/g ASTM D8045

0.044



OIL ANALYSIS REPORT

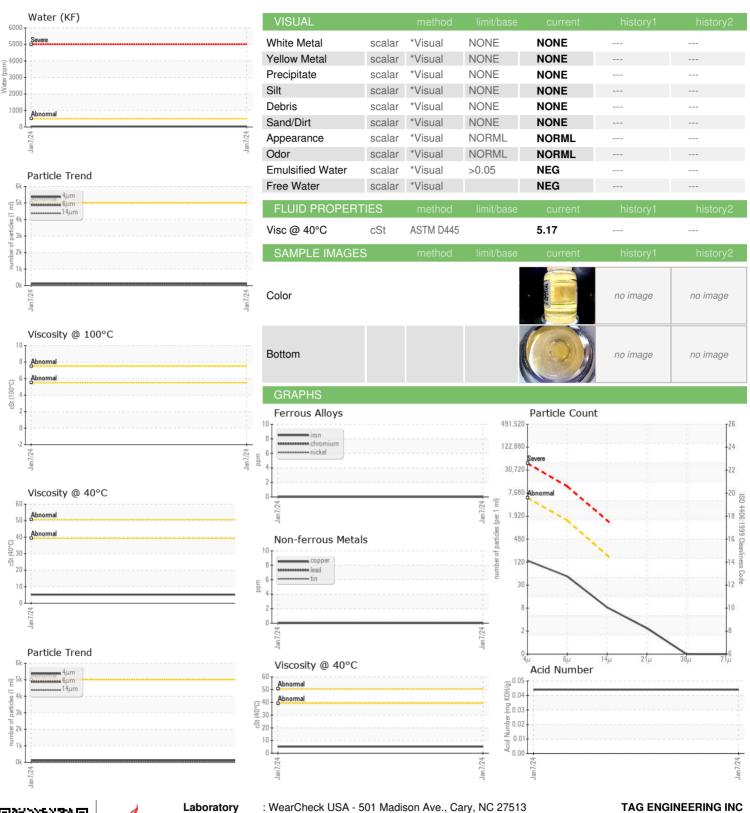



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0888958 : 06054466 : 10820415

Recieved Diagnosed

: 08 Jan 2024 : 10 Jan 2024 Diagnostician : Jonathan Hester

Test Package : IND 2 (Additional Tests: KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TAG ENGINEERING INC

6707 WHITESTONE RD BALTIMORE, MD US 21207

Contact: MIKE STEVENSON mike@tagengineering.com

T: (410)265-8686

F: (410)265-8690