

OIL ANALYSIS REPORT

SAMPLE INFORMATION

T Sa

NORMAL



PAO FLUSH PUMP 0888956

Component **Hydraulic System**

Fluid

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Discrete particle counts [100 ml] $5-15\mu m = 3300$, $15-25\mu m = 400$, $25-50\mu m = 100$, $50-100\mu m = 0$, $>100\mu m = 0$. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Jan 20.	24	

SAMPLE INFORM	MATION	method	ilmii/base	current	nistory i	nistory2
Sample Number		Client Info		WC0888956		
Sample Date		Client Info		07 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
			12 24 /1		111	111
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		ام مالم مما	lineit/lenen	a	المرسمة ما	la i a ta un c
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		28		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m	00	1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.004		
ppm Water	ppm	ASTM D6304	>500	41		
FLUID CLEANLIN	IESS	method				history2
Particles >4µm		ASTM D7647	>5000	101		
Particles >6µm		ASTM D7647	>1300	38		
Particles >14µm		ASTM D7647	>160	5		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/12/10		
	TION -					
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.046		



OIL ANALYSIS REPORT

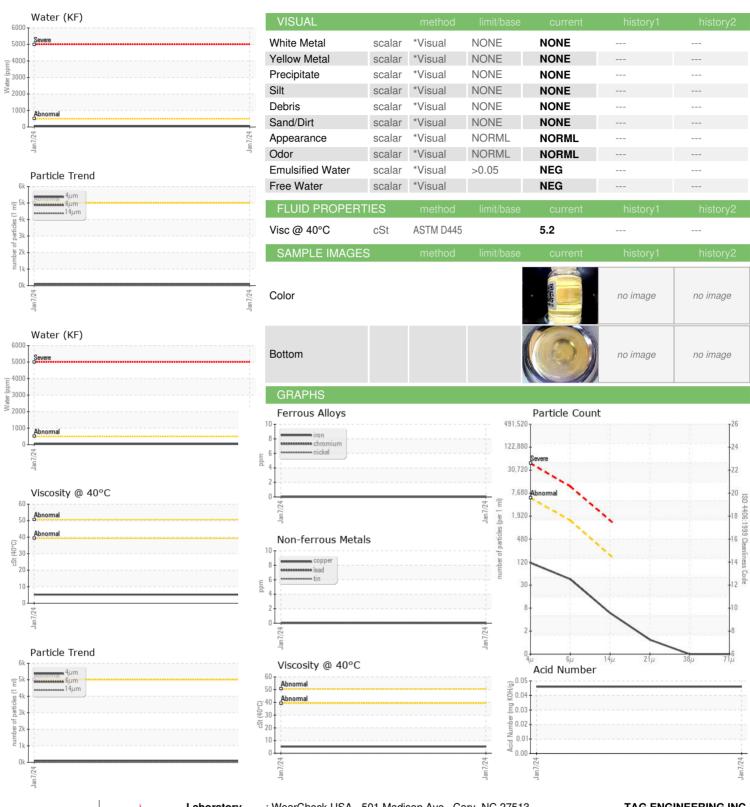



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0888956 : 06054469 : 10820418

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved Diagnosed

Diagnostician

: 08 Jan 2024 : 10 Jan 2024 : Jonathan Hester

Test Package : IND 2 (Additional Tests: KF) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) TAG ENGINEERING INC

6707 WHITESTONE RD BALTIMORE, MD US 21207

Contact: MIKE STEVENSON mike@tagengineering.com

T: (410)265-8686 F: (410)265-8690