

# **OIL ANALYSIS REPORT**

### Sample Rating Trend

#### **NORMAL**



# PAO PRESSURE DROP TEST

Component

{not provided} (--- GAL)

**Hydraulic System** 

## DIAGNOSIS Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

#### Contamination

Discrete particle counts [100 ml] 5-15µm = 1400,  $15-25\mu m = 0$ ,  $25-50\mu m = 200$ ,  $50-100\mu m = 0$ ,  $>100\mu m = 0$ . There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

「SET A 0888	3961					
				Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0888961		
Sample Date		Client Info		07 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
		mounoa	minubacc	Garrent	Thistory	111010172
Iron	ppm	ASTM D5185m	>20	0		
Iron Chromium	ppm ppm					
		ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m ASTM D5185m	>20 >20	0 0		
Chromium Nickel	ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20	0 0 0		
Chromium Nickel Titanium	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20	0 0 0		
Chromium Nickel Titanium Silver	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20 >20 >20	0 0 0 0		
Chromium Nickel Titanium Silver Aluminum	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20 >20 >20 >20 >20	0 0 0 0 0		
Chromium Nickel Titanium Silver Aluminum Lead	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20 >20 >20 >20 >20	0 0 0 0 0 0		
Chromium Nickel Titanium Silver Aluminum Lead Copper	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20 >20 >20 >20 >20 >20 >20	0 0 0 0 0 0 0		

Caumum	ррпп	AO INI DO IOSIII		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		28		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		1		

ASTM D5185m >20

ppm

mg KOH/g ASTM D8045

Water	%	ASTM D6304	>0.05	0.004		
ppm Water	ppm	ASTM D6304	>500	43		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		42		
Particles >6µm		ASTM D7647	>160	16		
Particles >14μm		ASTM D7647	>20	2		
Particles >21μm		ASTM D7647	>4	2		
Particles >38μm		ASTM D7647	>3	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/14/11	13/11/9		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0


0.044

Acid Number (AN)

Potassium



## **OIL ANALYSIS REPORT**

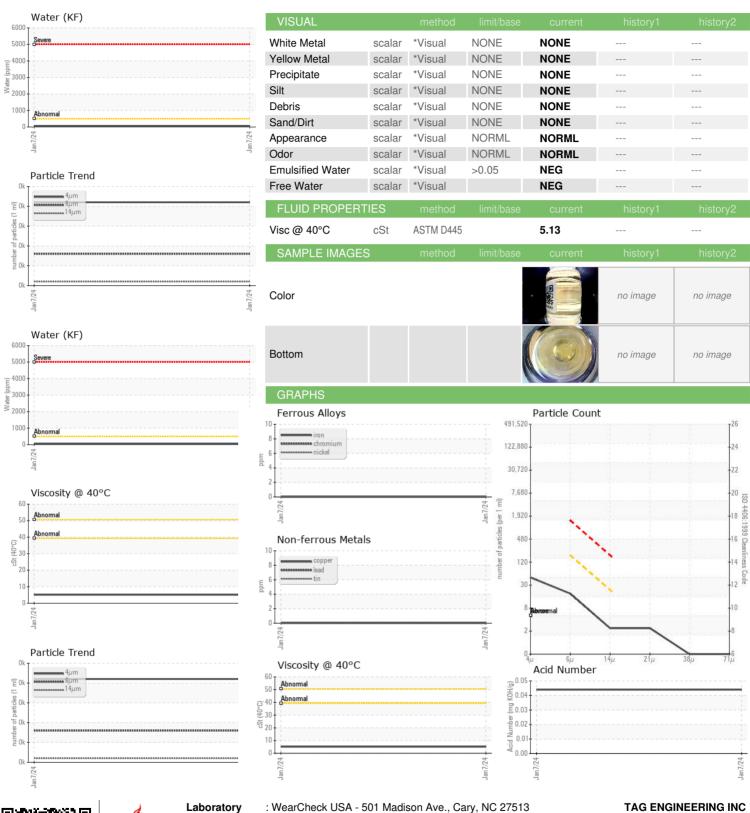



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: WC0888961 : 06054473

: 10820422

Recieved Diagnosed

: 08 Jan 2024 : 10 Jan 2024 : Jonathan Hester Diagnostician

Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

6707 WHITESTONE RD BALTIMORE, MD US 21207

Contact: MIKE STEVENSON mike@tagengineering.com

T: (410)265-8686 F: (410)265-8690