




OIL ANALYSIS REPORT

Sample Rating Trend

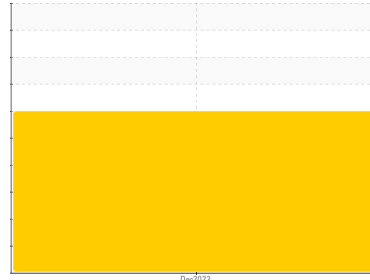

DIRT



Machine Id
MC7191

Component
Diesel Engine

Fluid
CASTROL EDGE 15W40 SYN (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

▲ Wear

Iron and lead and tin ppm levels are abnormal. Aluminum ppm levels are noted.

▲ Contamination

Light fuel dilution occurring. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0895316	---	---
Sample Date	Client Info	19 Dec 2023	---	---
Machine Age	hrs Client Info	1800	---	---
Oil Age	hrs Client Info	500	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	▲ 214	---	---
Chromium ppm	ASTM D5185m >20	7	---	---
Nickel ppm	ASTM D5185m >4	<1	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m >3	<1	---	---
Aluminum ppm	ASTM D5185m >20	▲ 9	---	---
Lead ppm	ASTM D5185m >40	▲ 52	---	---
Copper ppm	ASTM D5185m >330	78	---	---
Tin ppm	ASTM D5185m >15	▲ 15	---	---
Vanadium ppm	ASTM D5185m	<1	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	57	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	64	---	---
Manganese ppm	ASTM D5185m	8	---	---
Magnesium ppm	ASTM D5185m	1176	---	---
Calcium ppm	ASTM D5185m	1011	---	---
Phosphorus ppm	ASTM D5185m	1192	---	---
Zinc ppm	ASTM D5185m	1453	---	---
Sulfur ppm	ASTM D5185m	3183	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	▲ 34	---	---
Sodium ppm	ASTM D5185m	5	---	---
Potassium ppm	ASTM D5185m >20	4	---	---
Fuel %	ASTM D3524 >5	▲ 4.1	---	---

INFRA-RED






method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	0.7	---	---
Nitration	Abs/cm *ASTM D7624 >20	9.9	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	22.1	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.1	---	---
Base Number (BN)	mg KOH/g ASTM D2896	4.5	---	---







OIL ANALYSIS REPORT

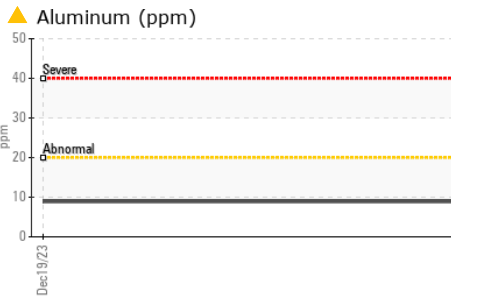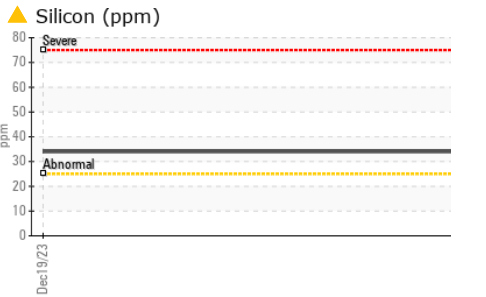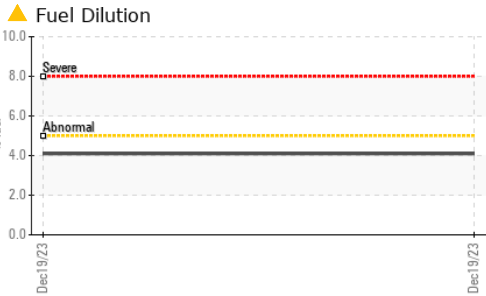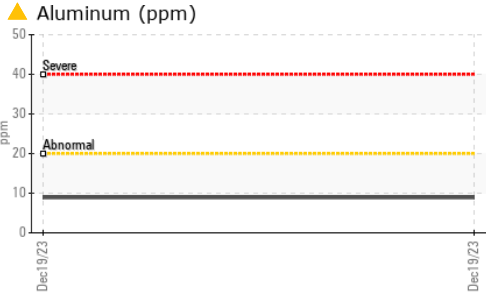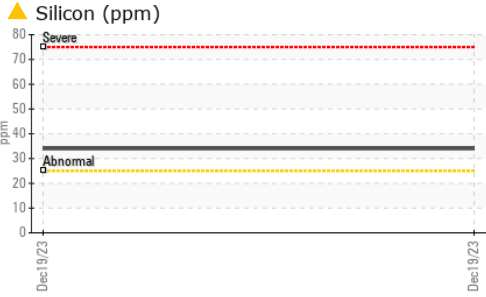

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.7	---	---

GRAPHS

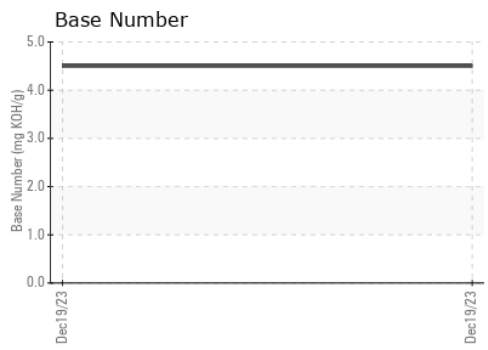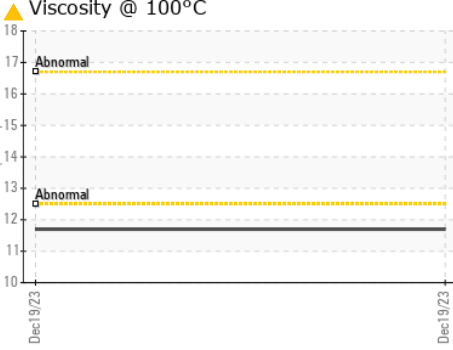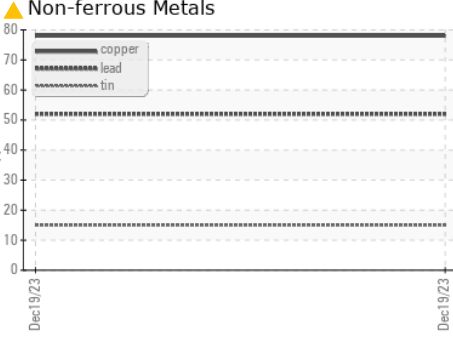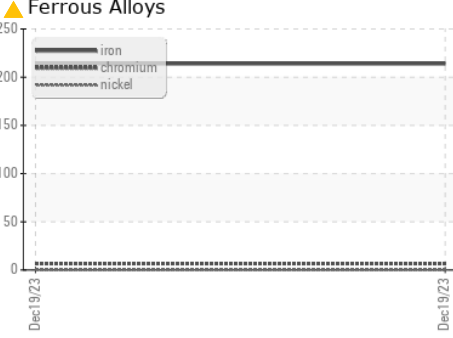

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895316 **Received** : 08 Jan 2024
Lab Number : 06054577 **Diagnosed** : 10 Jan 2024
Unique Number : 10820526 **Diagnostician** : Angela Borella
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

AME INC
 2467 COLTHARP RD
 FORT MILL, SC
 US 29715
 Contact: RUSTY BEACH
 RUSTY.BEACH@AMEONLINE.COM

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)