




OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
MARYNEAL [200006807]
 Machine Id
87031 SITE 31
 Component
Wind Turbine Gearbox
 Fluid
FUCHS RENOLIN CLP ISO 320 (650 LTR)

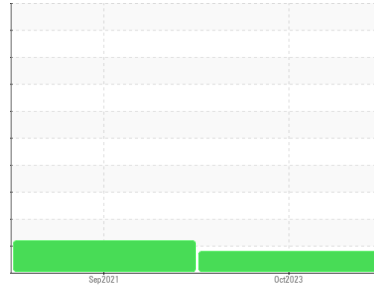

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX06054860	NX009596	---
Sample Date	Client Info		13 Oct 2023	30 Sep 2021	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ATTENTION	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>80	13	14	---
Iron	ppm	ASTM D5185m	>150	9	6
Chromium	ppm	ASTM D5185m	>5	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0
Titanium	ppm	ASTM D5185m	>10	0	0
Silver	ppm	ASTM D5185m		0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1
Lead	ppm	ASTM D5185m	>20	<1	<1
Copper	ppm	ASTM D5185m	>50	0	<1
Tin	ppm	ASTM D5185m	>3	0	<1
Antimony	ppm	ASTM D5185m	>3	---	<1
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		6	6
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		0	0
Manganese	ppm	ASTM D5185m		0	<1
Magnesium	ppm	ASTM D5185m		0	0
Calcium	ppm	ASTM D5185m		11	19
Phosphorus	ppm	ASTM D5185m		185	196
Zinc	ppm	ASTM D5185m		0	0
Sulfur	ppm	ASTM D5185m		4696	3903

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	10	8
Sodium	ppm	ASTM D5185m	>20	6	0
Potassium	ppm	ASTM D5185m	>20	0	11
Water	%	ASTM D6304	>0.05	0.003	0.001
ppm Water	ppm	ASTM D6304	>500	28	12.8


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		16352	22291	---
Particles >6µm	ASTM D7647	>2500	▲ 4993	▲ 8299	---
Particles >14µm	ASTM D7647	>320	253	▲ 1114	---
Particles >21µm	ASTM D7647	>80	37	▲ 320	---
Particles >38µm	ASTM D7647	>20	1	6	---
Particles >71µm	ASTM D7647	>4	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/18/15	▲ 21/19/15	▲ 22/20/17	---




OIL ANALYSIS REPORT


Particle Trend

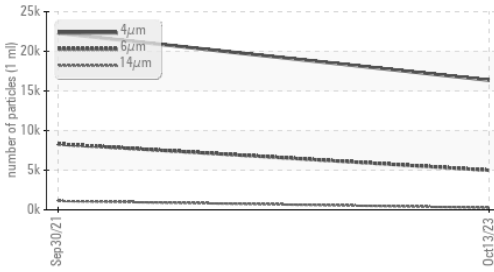


Water (KF)

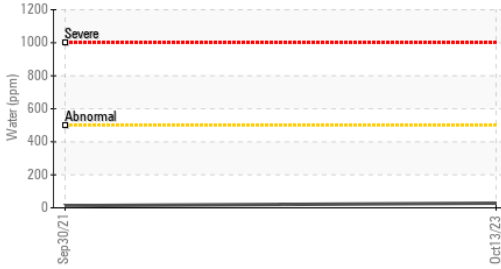


PQ

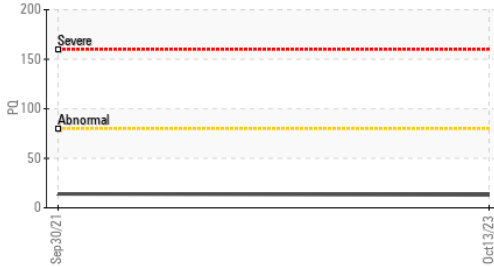

Water (KF)

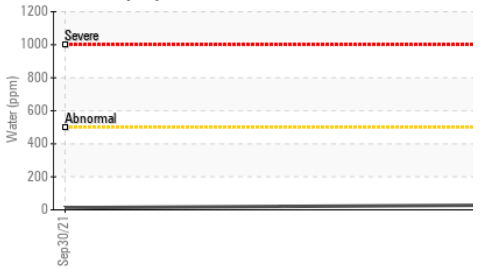

Viscosity @ 40°C

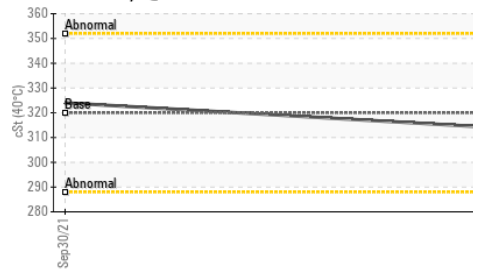


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.44	0.37	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	314	324

SAMPLE IMAGES

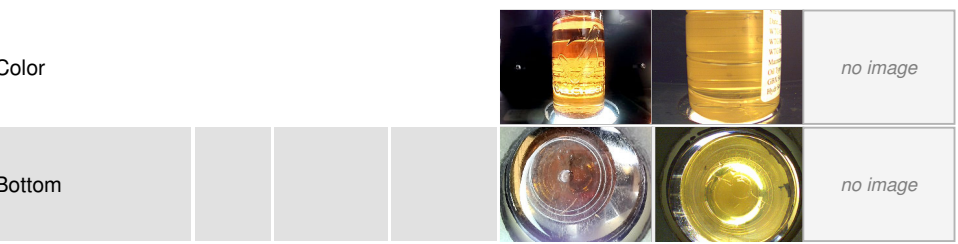


GRAPHS


Ferrous Alloys

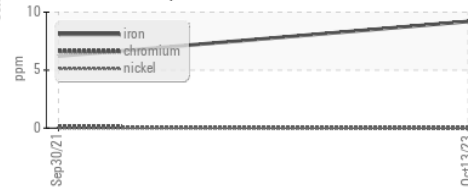


Non-ferrous Metals

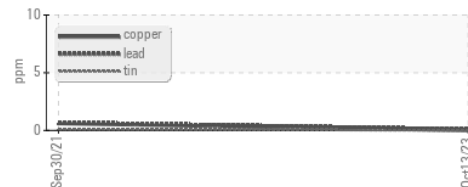


Viscosity @ 40°C

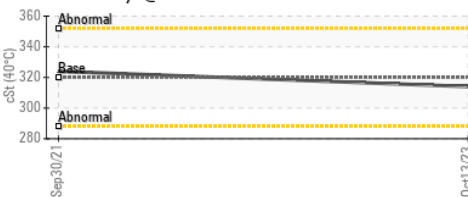

Particle Count

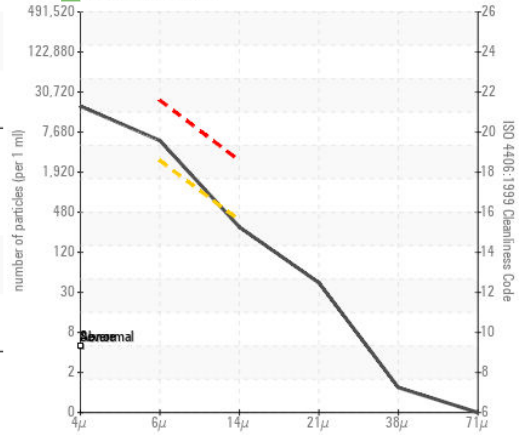

Acid Number

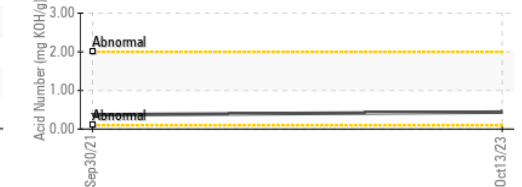

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX06054860 **Received** : 08 Jan 2024
Lab Number : 06054860 **Diagnosed** : 10 Jan 2024
Unique Number : 10820809 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NORDEX USA - Chicago
 300 SOUTH WACKER DRIVE, SUITE 1500
 CHICAGO, IL
 US 60606

Contact: DEVIN LINEHAN
 DLinehan@nordex-online.com
 T: (312)386-4124
 F: (312)386-7102