




OIL ANALYSIS REPORT

Sample Rating Trend

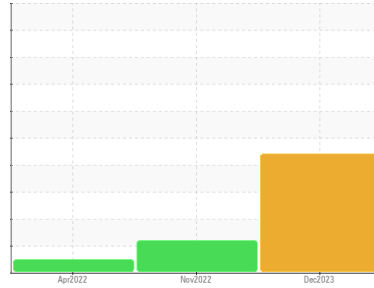

DIRT



Area
HOWARD SHEPPARD
 Machine Id
2574 HOWARD SHEPPARD
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

Gear wear is indicated.

Contamination

There is a high amount of particulates present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0876067	WC0771227	WC0692956
Sample Date	Client Info		27 Dec 2023	26 Nov 2022	06 Apr 2022
Machine Age	mls	Client Info	166721	57353	1102
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	▲ 551	273	68
Chromium	ppm	ASTM D5185m >10	2	2	2
Nickel	ppm	ASTM D5185m >10	0	<1	<1
Titanium	ppm	ASTM D5185m	<1	1	<1
Silver	ppm	ASTM D5185m	0	0	4
Aluminum	ppm	ASTM D5185m >25	9	▲ 23	1
Lead	ppm	ASTM D5185m >25	0	<1	<1
Copper	ppm	ASTM D5185m >100	1	2	1
Tin	ppm	ASTM D5185m >10	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	14	218	195
Barium	ppm	ASTM D5185m 200	0	2	0
Molybdenum	ppm	ASTM D5185m 12	0	<1	<1
Manganese	ppm	ASTM D5185m	9	14	11
Magnesium	ppm	ASTM D5185m 12	4	2	3
Calcium	ppm	ASTM D5185m 150	29	8	5
Phosphorus	ppm	ASTM D5185m 1650	294	1357	1151
Zinc	ppm	ASTM D5185m 125	21	15	6
Sulfur	ppm	ASTM D5185m 22500	13486	27001	17730

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	▲ 100	68	10
Sodium	ppm	ASTM D5185m	1	4	3
Potassium	ppm	ASTM D5185m >20	0	2	3
Water	%	ASTM D6304 >.2	0.005	0.070	0.038
ppm Water	ppm	ASTM D6304 >2000	57	707.0	380.6

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 231330	---	---
Particles >6µm	ASTM D7647	>5000	▲ 172478	---	---
Particles >14µm	ASTM D7647	>640	▲ 8127	---	---
Particles >21µm	ASTM D7647	>160	▲ 300	---	---
Particles >38µm	ASTM D7647	>40	13	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 25/25/20	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	0.61	2.32	2.41




OIL ANALYSIS REPORT

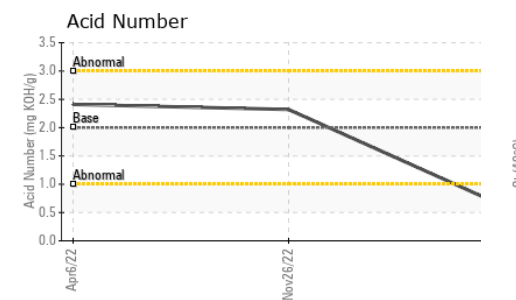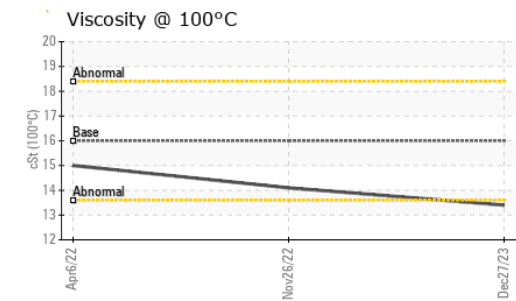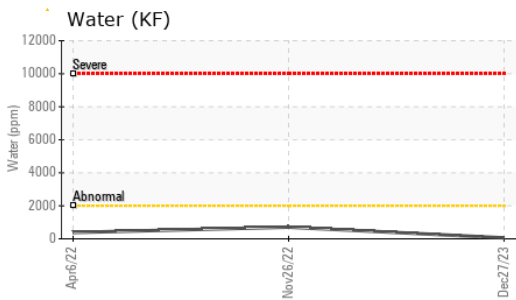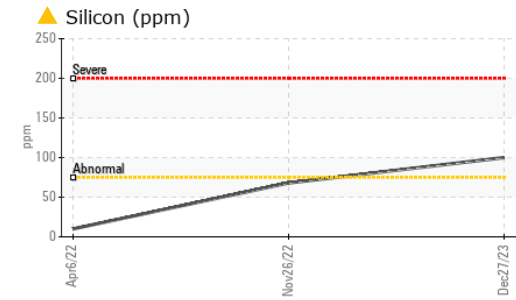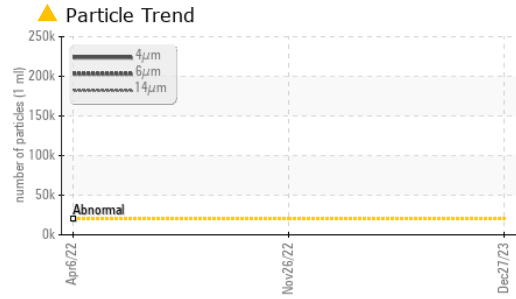






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	88.4	96.9
Visc @ 100°C	cSt	ASTM D445	16.0	13.4	14.1
Viscosity Index (VI)	Scale	ASTM D2270	157	153	148

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

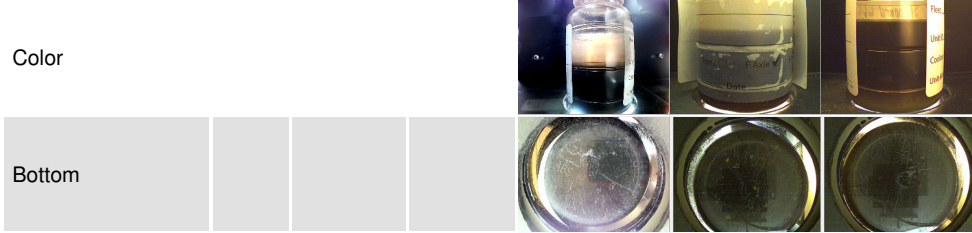

GRAPHS

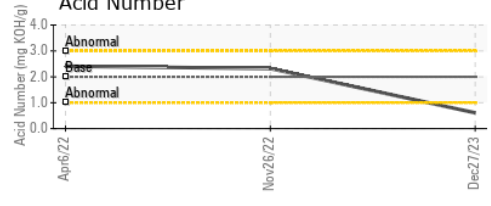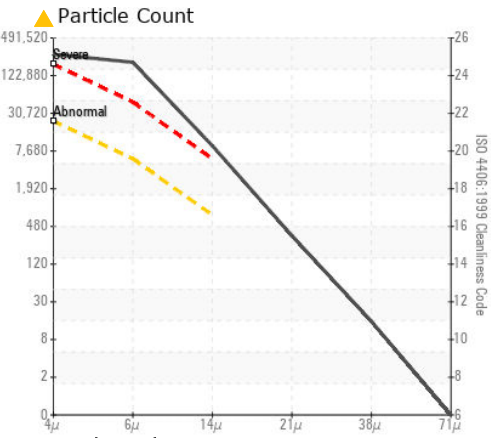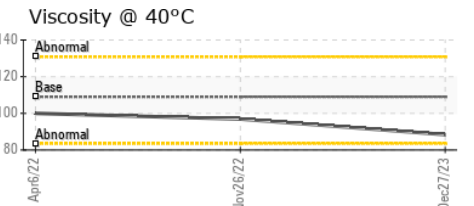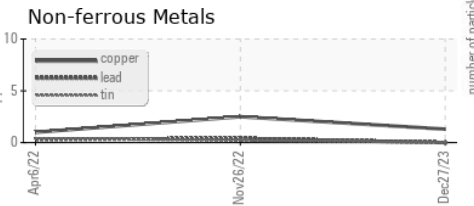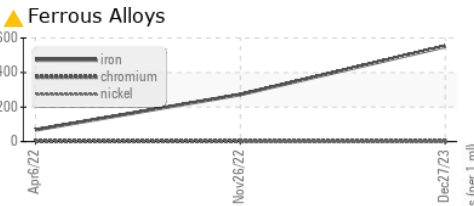

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876067 **Received** : 08 Jan 2024
Lab Number : 06054902 **Diagnosed** : 10 Jan 2024
Unique Number : 10820851 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)