



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area
HOWARD SHEPPARD
 Machine Id
2578 HOWARD SHEPPARD
 Component
Rear Differential
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0876063	---	---
Sample Date	Client Info	12 Oct 2023	---	---
Machine Age	mls Client Info	114534	---	---
Oil Age	mls Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >500	5	---	---
Chromium ppm	ASTM D5185m >10	0	---	---
Nickel ppm	ASTM D5185m >10	0	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m	0	---	---
Aluminum ppm	ASTM D5185m >25	2	---	---
Lead ppm	ASTM D5185m >25	0	---	---
Copper ppm	ASTM D5185m >100	0	---	---
Tin ppm	ASTM D5185m >10	0	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	248	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	0	---	---
Manganese ppm	ASTM D5185m	0	---	---
Magnesium ppm	ASTM D5185m	0	---	---
Calcium ppm	ASTM D5185m	0	---	---
Phosphorus ppm	ASTM D5185m	1417	---	---
Zinc ppm	ASTM D5185m	2	---	---
Sulfur ppm	ASTM D5185m	22981	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >75	2	---	---
Sodium ppm	ASTM D5185m	<1	---	---
Potassium ppm	ASTM D5185m >20	0	---	---
Water %	ASTM D6304 >.2	0.046	---	---
ppm Water ppm	ASTM D6304 >2000	460	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 79231	---	---
Particles >6µm	ASTM D7647 >5000	▲ 8201	---	---
Particles >14µm	ASTM D7647 >640	39	---	---
Particles >21µm	ASTM D7647 >160	4	---	---
Particles >38µm	ASTM D7647 >40	0	---	---
Particles >71µm	ASTM D7647 >10	0	---	---
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 23/20/12	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	2.46	---	---



OIL ANALYSIS REPORT

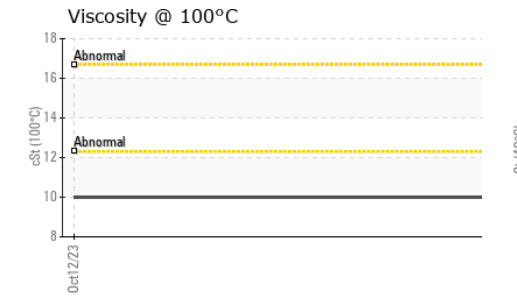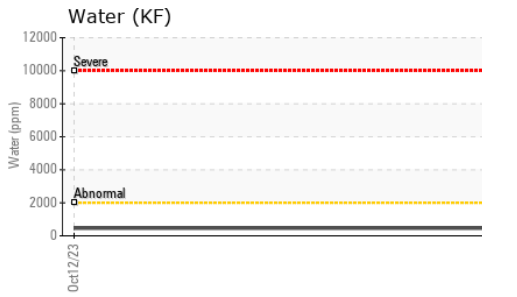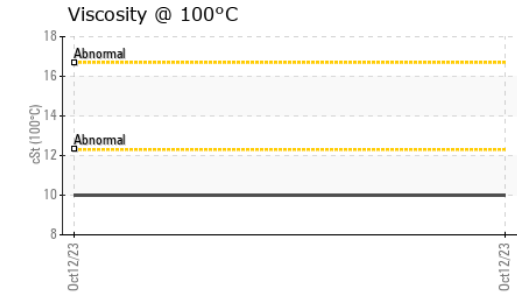
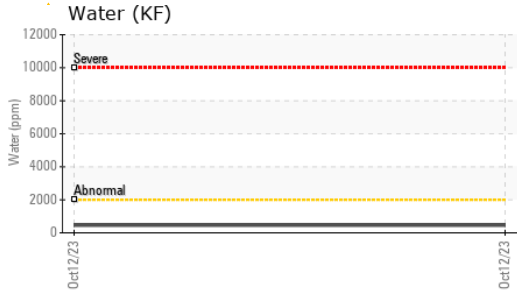
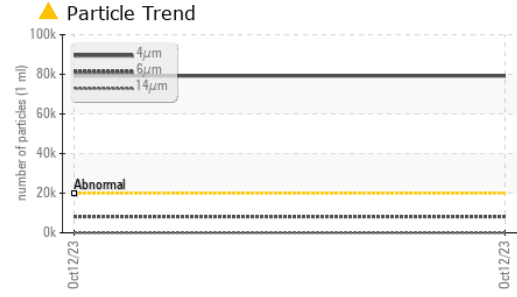


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	54.7	---	---
Visc @ 100°C	cSt	ASTM D445	10.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270	172	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

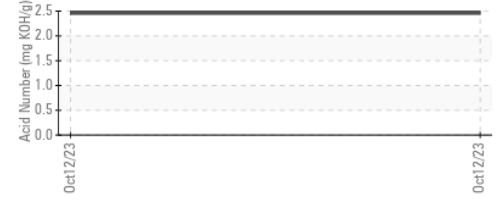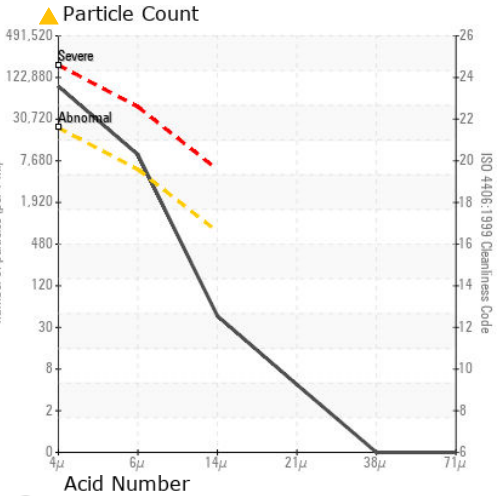

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876063 **Received** : 08 Jan 2024
Lab Number : 06054906 **Diagnosed** : 10 Jan 2024
Unique Number : 10820855 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)