




# OIL ANALYSIS REPORT

Sample Rating Trend

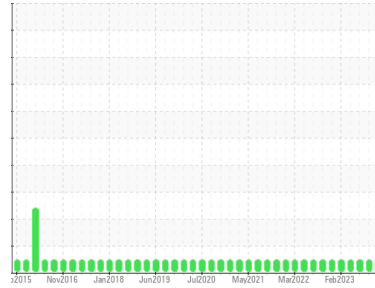

**NORMAL**



Machine Id  
**MACK A-1**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON DELO 400 LE 15W40 (14 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0871812</b>	WC0819751	WC0819743
Sample Date	Client Info		<b>06 Dec 2023</b>	09 Oct 2023	14 Aug 2023
Machine Age	hrs	Client Info	<b>27205</b>	26892	26572
Oil Age	hrs	Client Info	<b>300</b>	300	300
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>25</b>	26	29
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>2</b>	<1	1
Copper	ppm	ASTM D5185m >330	<b>8</b>	3	4
Tin	ppm	ASTM D5185m >15	<b>2</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>307</b>	293	378
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>116</b>	121	132
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>629</b>	617	640
Calcium	ppm	ASTM D5185m	<b>1444</b>	1472	1542
Phosphorus	ppm	ASTM D5185m 1200	<b>670</b>	741	712
Zinc	ppm	ASTM D5185m 1300	<b>832</b>	817	858
Sulfur	ppm	ASTM D5185m 3200	<b>2549</b>	2385	2740

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	7	10
Sodium	ppm	ASTM D5185m	<b>0</b>	22	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	13	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.9</b>	1.1	1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	6.3	6.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	23.5	23.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.1</b>	14.9	15.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>10.07</b>	9.99	9.32











# OIL ANALYSIS REPORT

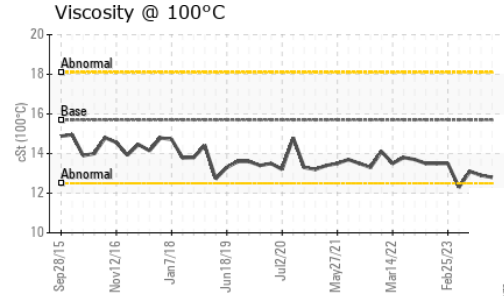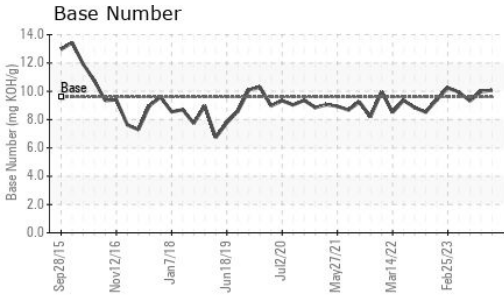

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	<b>12.8</b>	12.9	13.1

## GRAPHS

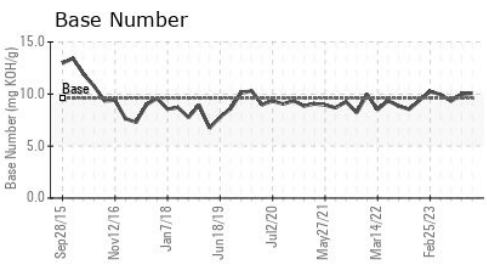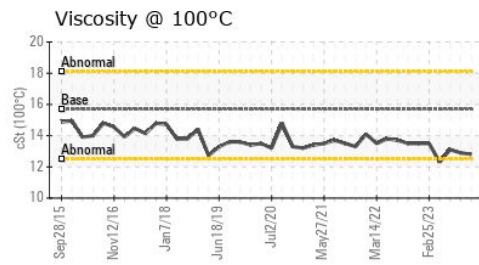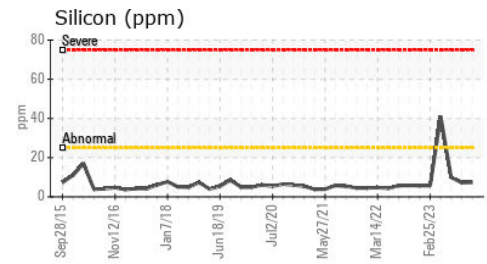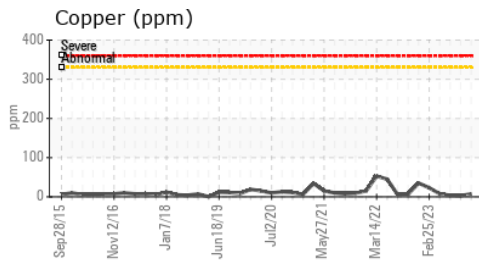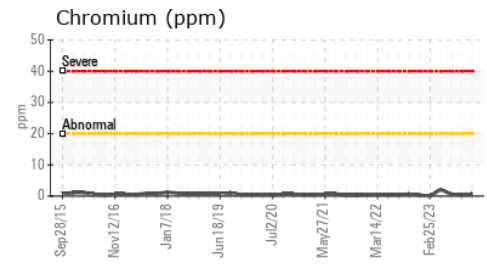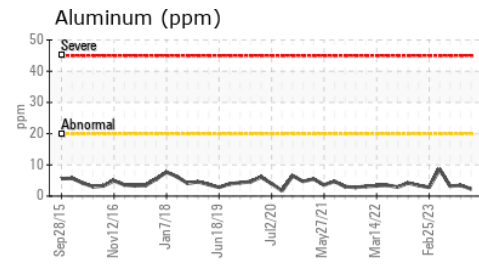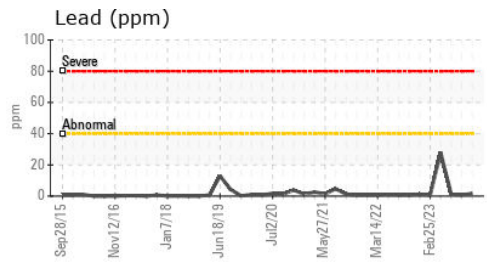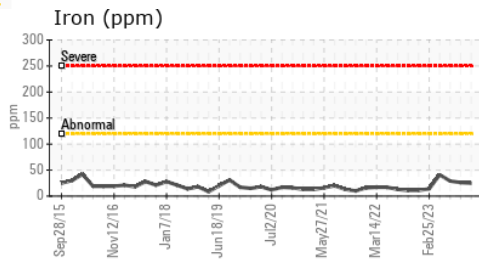

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0871812 **Received** : 08 Jan 2024  
**Lab Number** : 06055046 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10820995 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**ALLEGHENY DISPOSAL LLC**  
 PO BOX 4  
 GREEN BANK, WV  
 US 24944  
 Contact: SERVICE MANAGER  
 meckmechanic@frontier.com  
 T: (304)456-4541  
 F: (304)456-4540

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)