OIL ANALYSIS REPORT

Sample Rating Trend

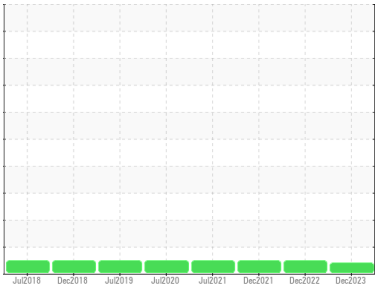

VIS DEBRIS

Area
LACTOSE [1886753]
Machine Id
CY04AG01GB01
Component
Gearbox
Fluid
MOBIL MOBILGEAR SHC 220 (--- QTS)

DIAGNOSIS

Recommendation
We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0864095**	WC0760766	WC0652802
Sample Date		Client Info		**25 Dec 2023**	28 Dec 2022	30 Dec 2021
Machine Age	mths	Client Info		**0**	0	0
Oil Age	mths	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**ABNORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**2**	3	5
Chromium	ppm	ASTM D5185m	>15	**<1**	0	0
Nickel	ppm	ASTM D5185m	>15	**<1**	0	0
Titanium	ppm	ASTM D5185m		**<1**	0	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>25	**2**	0	0
Lead	ppm	ASTM D5185m	>100	**<1**	0	0
Copper	ppm	ASTM D5185m	>200	**<1**	0	0
Tin	ppm	ASTM D5185m	>25	**<1**	<1	0
Antimony	ppm	ASTM D5185m	>5	**---**	---	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**<1**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	0	0
Barium	ppm	ASTM D5185m		**0**	0	0
Molybdenum	ppm	ASTM D5185m		**<1**	0	0
Manganese	ppm	ASTM D5185m		**<1**	0	0
Magnesium	ppm	ASTM D5185m		**<1**	0	0
Calcium	ppm	ASTM D5185m		**1**	2	0
Phosphorus	ppm	ASTM D5185m		**935**	989	883
Zinc	ppm	ASTM D5185m		**0**	11	0
Sulfur	ppm	ASTM D5185m		**0**	182	69

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**26**	25	28
Sodium	ppm	ASTM D5185m		**0**	<1	0
Potassium	ppm	ASTM D5185m	>20	**1**	0	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**MODER**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

OIL ANALYSIS REPORT

Viscosity @ 40°C

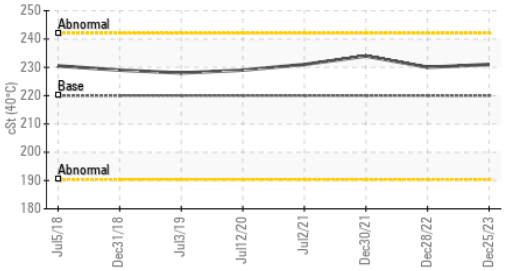

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	**231**	230	234

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

Ferrous Alloys

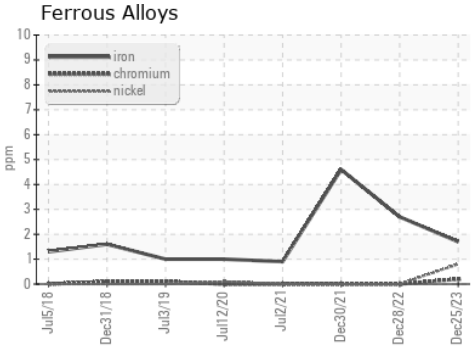

Non-ferrous Metals

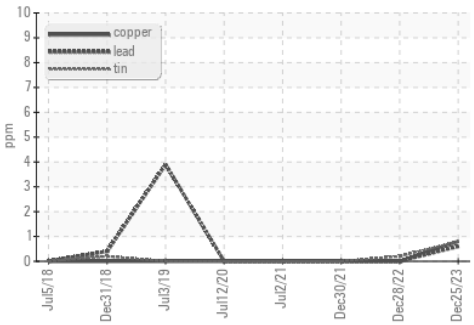

Viscosity @ 40°C

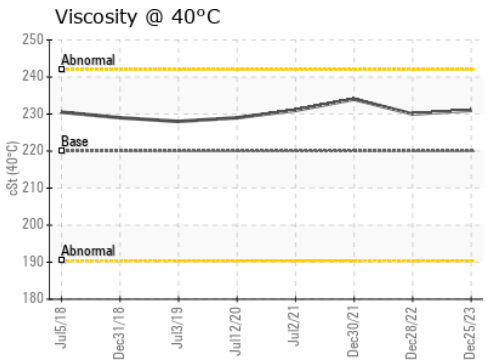

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864095
Lab Number : 06055114
Unique Number : 10821063
Test Package : IND 1

Recieved : 08 Jan 2024
Diagnosed : 10 Jan 2024
Diagnostician : Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LEPRINO FOODS-GREELEY
1302 1ST AVE
GREELEY, CO
US 80631-5909
Contact: ERIC KLINE
EKLINE@LEPRINOFOODS.COM
T:
F: (970)347-5190