

OIL ANALYSIS REPORT

Area **DEPT 300 [975269]** Machine Id **QUINCY 5 - MTC-2370** Component

Compressor

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend

 \checkmark

NORMAL


| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|--------------|------------|-------------|-------------|-------------|
| Sample Number | | Client Info | | WC0852642 | WC0852645 | WC0816142 |
| Sample Date | | Client Info | | 28 Oct 2023 | 06 Oct 2023 | 13 Jul 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 10908 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Calcium | ppm | ASTM D5185m | | 1 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 144 | 208 | 240 |
| Zinc | ppm | ASTM D5185m | | 18 | 0 | 7 |
| Sulfur | ppm | ASTM D5185m | | 0 | 24 | 0 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 0 | <1 | <1 |
| Sodium | ppm | ASTM D5185m | | 2 | 3 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 3453 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 1304 | | |
| Particles >14µm | | ASTM D7647 | >320 | 197 | | |
| Particles >21µm | | ASTM D7647 | >80 | 74 | | |
| Particles >38µm | | ASTM D7647 | >20 | 5 | | |
| Particles >71µm | | ASTM D7647 | >4 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 19/18/15 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.36 | 0.47 | 0.52 |


Report Id: BALKEA [WUSCAR] 06055361 (Generated: 01/10/2024 17:34:08) Rev: 1


Contact/Location: JAY FAHRENBRUCH - BALKEA




OIL ANALYSIS REPORT

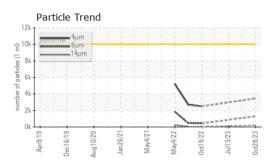

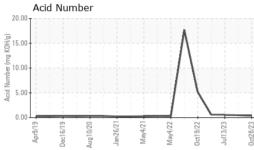

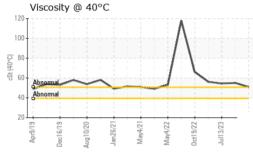




e

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | | 51.0 | 55.0 | 54.4 |
| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
| Color | | | | a. | | |



Bottom

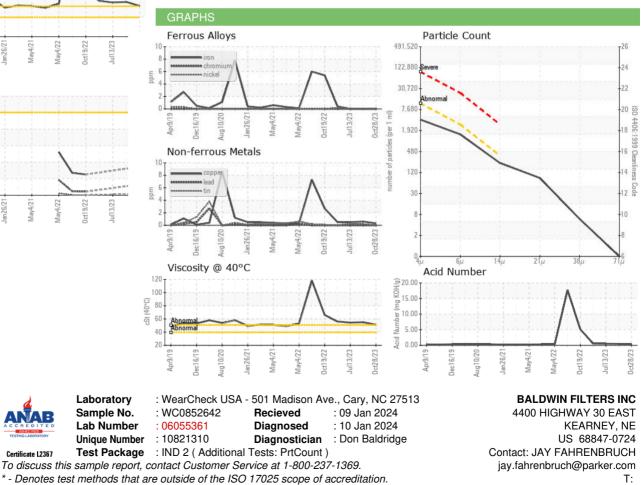

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: (800)828-4453