




# OIL ANALYSIS REPORT

Sample Rating Trend

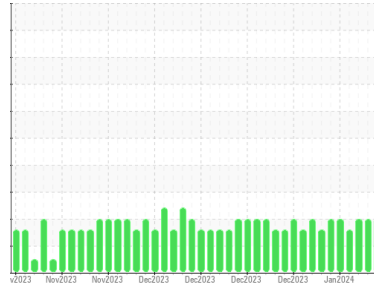

ISO



Area  
**WCLSNC**  
 Machine Id  
**QC230801HY**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0895293</b>	WC0895292	WC0895289
Sample Date	Client Info		<b>09 Jan 2024</b>	08 Jan 2024	05 Jan 2024
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>47	<b>40</b>	46	49	
Iron	ppm	ASTM D5185m	>78	<b>65</b>	79	70
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	2	2
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>5	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>11	<b>8</b>	10	10
Copper	ppm	ASTM D5185m	>84	<b>74</b>	86	73
Tin	ppm	ASTM D5185m	>4	<b>2</b>	3	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	6	<b>88</b>	102	91
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>19</b>	22	20
Magnesium	ppm	ASTM D5185m	145	<b>22</b>	23	25
Calcium	ppm	ASTM D5185m	3570	<b>3231</b>	3751	3442
Phosphorus	ppm	ASTM D5185m	1290	<b>1000</b>	1167	1202
Zinc	ppm	ASTM D5185m	1640	<b>1344</b>	1457	1466
Sulfur	ppm	ASTM D5185m		<b>2869</b>	3856	3412

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>11	<b>8</b>	10	9
Sodium	ppm	ASTM D5185m	>23	<b>18</b>	16	19
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Water	%	ASTM D6304	>0.1669	<b>0.062</b>	0.060	0.049
ppm Water	ppm	ASTM D6304	>1669	<b>628</b>	604	497

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 297831</b>	▲ 323922	▲ 446502
Particles >6µm	ASTM D7647	>1300	<b>▲ 175623</b>	▲ 183241	▲ 342631
Particles >14µm	ASTM D7647	>160	<b>▲ 2620</b>	▲ 2649	▲ 36506
Particles >21µm	ASTM D7647	>40	<b>▲ 131</b>	▲ 92	▲ 2201
Particles >38µm	ASTM D7647	>10	<b>1</b>	2	13
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 25/25/19</b>	▲ 26/25/19	▲ 26/26/22


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	<b>0.92</b>	0.86	0.835




# OIL ANALYSIS REPORT


## ▲ Particle Trend

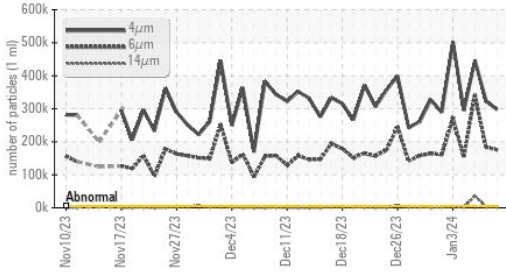


## Water (KF)

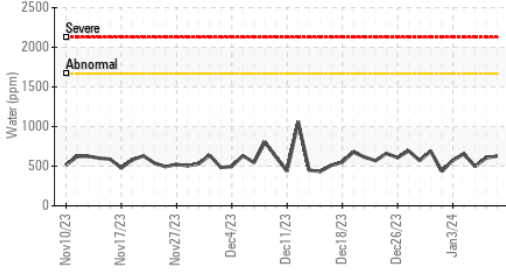


## Viscosity @ 100°C

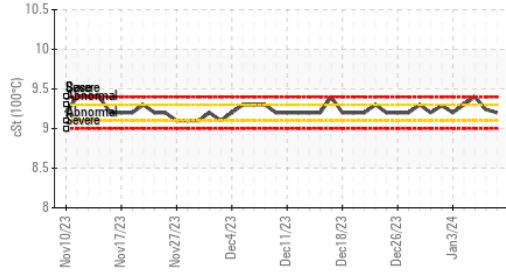

## PQ

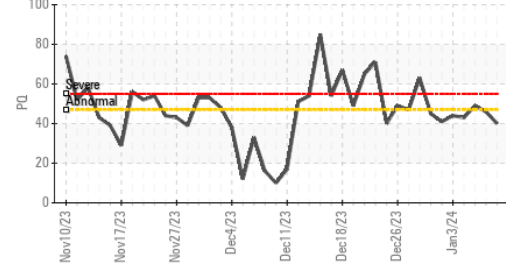

## Viscosity @ 100°C

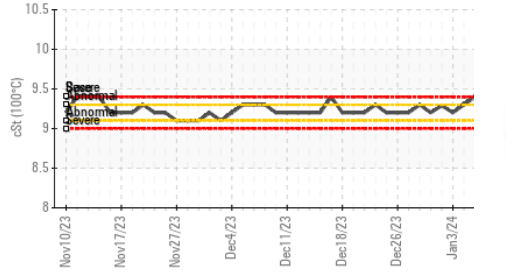

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1669	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	62.9	62.37
Visc @ 100°C	cSt	ASTM D445	9.4	9.2	9.24
Viscosity Index (VI)	Scale	ASTM D2270	147	124	126

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


## Color

## Bottom




## GRAPHS


### Ferrous Alloys

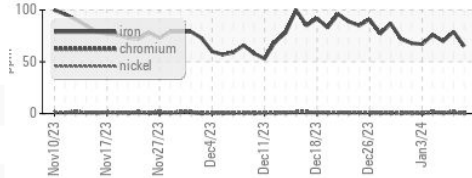


### Non-ferrous Metals

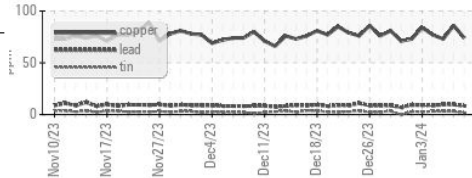


### Viscosity @ 40°C

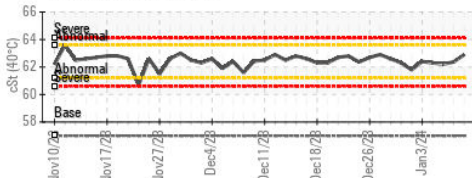

### ▲ Particle Count

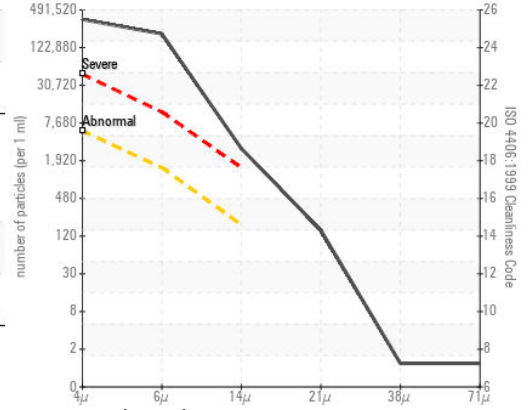

### Acid Number

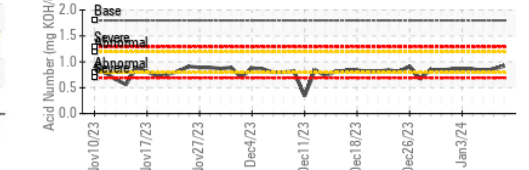

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0895293 **Received** : 09 Jan 2024  
**Lab Number** : 06055370 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10821319 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, VI )

**WEARCHECK LUBRICATION SERVICES QA ACCOUNT**  
 501 Madison Ave  
 Cary, NC  
 US 27513  
 Contact: WCLS CARY NC

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)379-4102

F: (919)379-4050