




# OIL ANALYSIS REPORT

Sample Rating Trend

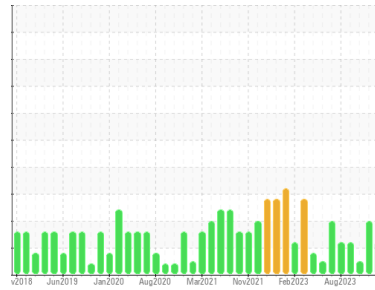

ISO



Machine Id  
**CATERPILLAR D10T 15105050 (S/N CATOD10TCRJG01497)**  
 Component  
**Hydraulic System**  
 Fluid  
**ROYAL PURPLE SYNDRAULIC 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0036199</b>	RP0036210	RP0033489
Sample Date	Client Info		<b>27 Dec 2023</b>	20 Nov 2023	24 Oct 2023
Machine Age	hrs	Client Info	<b>76448</b>	76064	75707
Oil Age	hrs	Client Info	<b>1037</b>	653	296
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>ATTENTION</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>3</b>	2	2
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	<1	1
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >75	<b>53</b>	45	41
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185m 150	<b>102</b>	50	74
Phosphorus	ppm	ASTM D5185m 670	<b>291</b>	327	349
Zinc	ppm	ASTM D5185m 800	<b>368</b>	368	397

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	2	1
Sodium	ppm	ASTM D5185m	<b>6</b>	3	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	2
Water	%	ASTM D6304 >0.1	<b>0.013</b>	0.005	0.013
ppm Water	ppm	ASTM D6304 >1000	<b>140</b>	59	135.3






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 5791</b>	▲ 6177	2696
Particles >6µm	ASTM D7647	>1300	<b>▲ 1304</b>	▲ 1999	793
Particles >14µm	ASTM D7647	>160	<b>80</b>	▲ 327	99
Particles >21µm	ASTM D7647	>40	<b>19</b>	▲ 112	29
Particles >38µm	ASTM D7647	>10	<b>0</b>	2	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 20/18/13</b>	▲ 20/18/16	19/17/14

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.38</b>	0.34	0.40


# OIL ANALYSIS REPORT

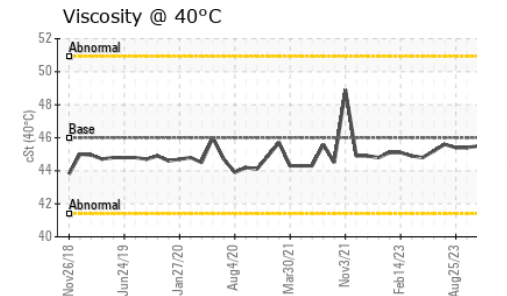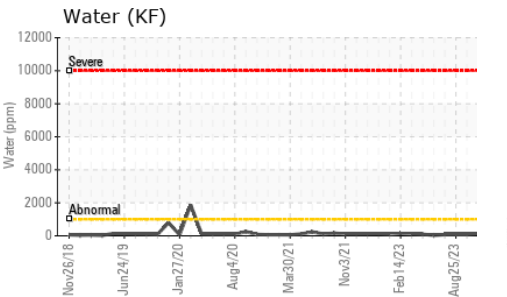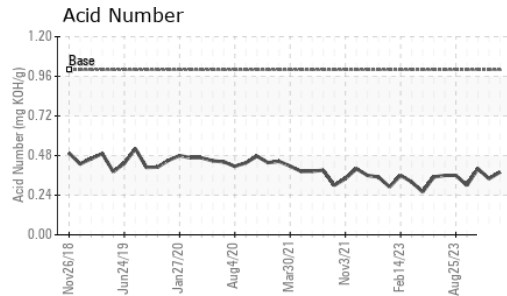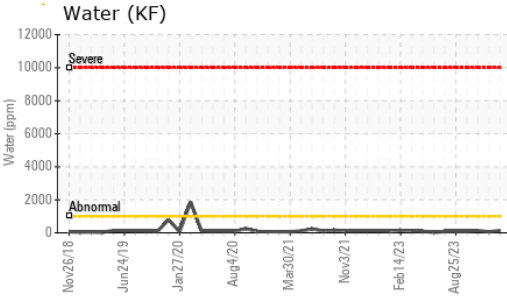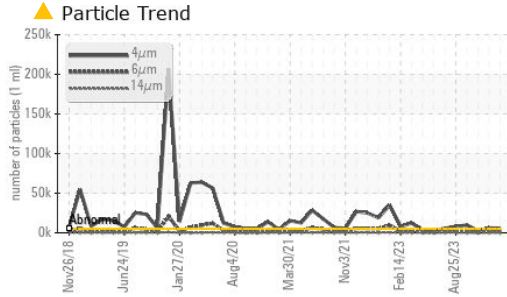






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	45.2	45.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

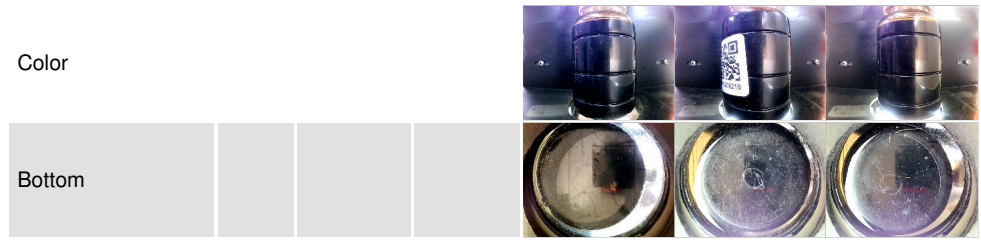

## GRAPHS

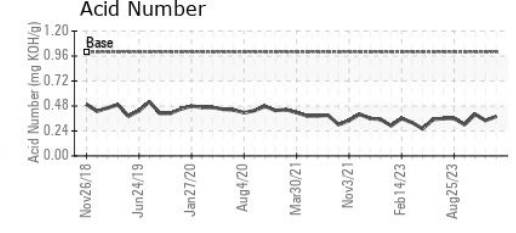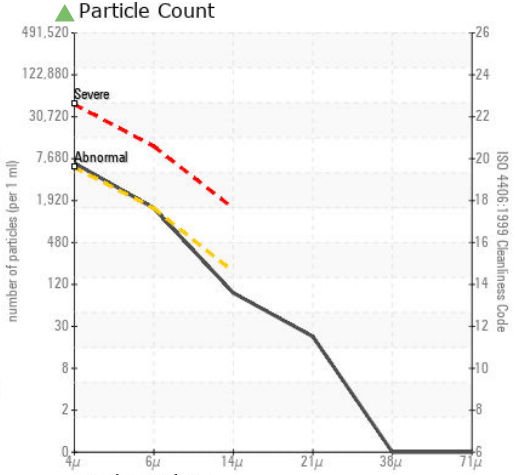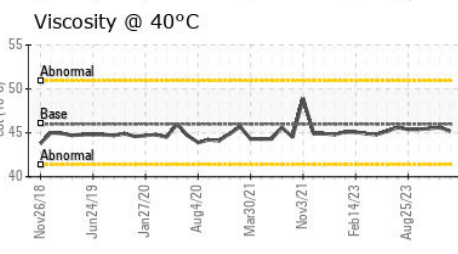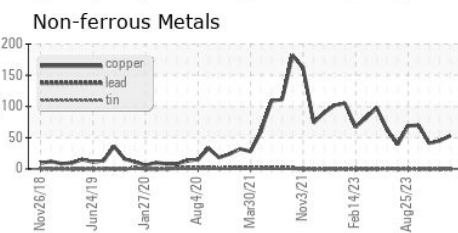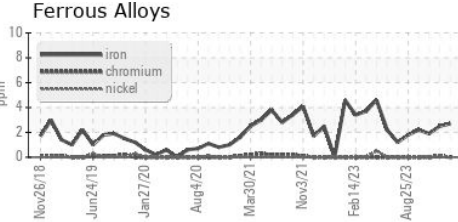

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0036199 **Recieved** : 09 Jan 2024  
**Lab Number** : 06055371 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821320 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**NRG TEXAS LLC**  
 3784 FM 39 SOUTH  
 JEWETT, TX  
 US 75846  
 Contact: JURGEN THOMPSON  
 JThompson@ecomaterial.com  
 T: (903)626-9528  
 F: (903)626-9772

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)