

OIL ANALYSIS REPORT

PG46 [252904] JX2846U00318 - ASCEND PACKAGE SYSTEMS

Compressor

{not provided} (--- GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|------------|-------------|----------|---|
| Sample Number | | Client Info | | UFD06055440 | | |
| Sample Date | | Client Info | | 25 Sep 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| | | | | | , | , <u>, , , , , , , , , , , , , , , , , , </u> |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | | 0 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | <1 | | |
| Tin | ppm | ASTM D5185m | >15 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 15 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 11 | | |
| Calcium | ppm | ASTM D5185m | | 12 | | |
| Phosphorus | ppm | ASTM D5185m | | 304 | | |
| Zinc | ppm | ASTM D5185m | | 25 | | |
| Sulfur | ppm | ASTM D5185m | | 0 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 2 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.17 | | |



OIL ANALYSIS REPORT

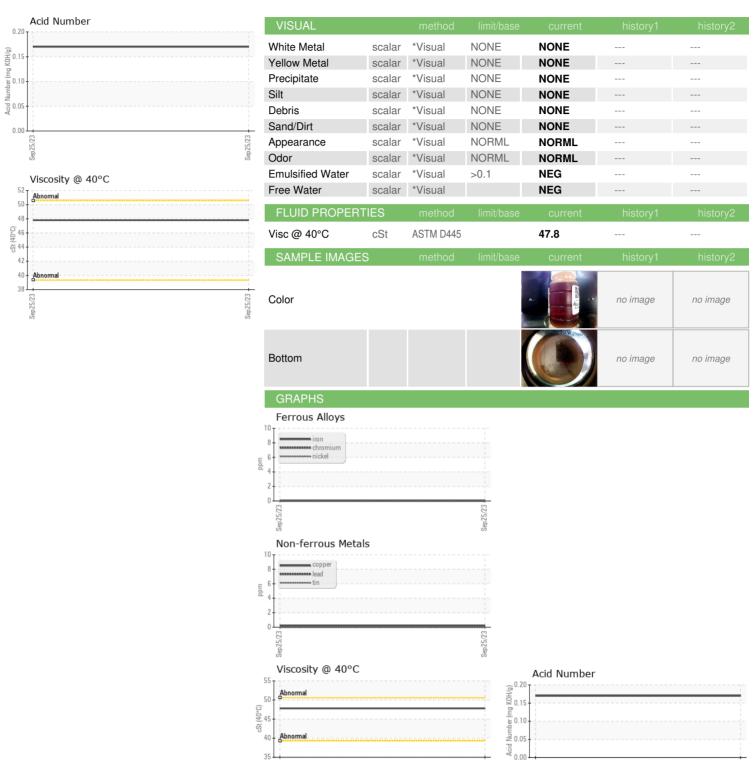





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number

: UFD06055440 : 06055440 : 10821389 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 09 Jan 2024 Recieved Diagnosed : 10 Jan 2024 Diagnostician

: Don Baldridge

FLUID-AIRE DYNAMICS 550 ALBION AVE SCHAUMBURG, IL US 60193

Contact: ED DIENER

ed.diener@fluidairedynamics.com T: (847)678-8388

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ED DIENER - UCFLUSCH

F: