


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

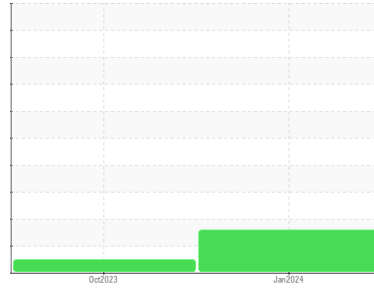

Machine Id
JOHN DEERE 624 P 1DW624PACPLX19407
Component
Front Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0200283	JR0179130	---
Sample Date	Client Info			04 Jan 2024	19 Oct 2023	---
Machine Age	hrs	Client Info		947	480	---
Oil Age	hrs	Client Info		0	480	---
Oil Changed	Client Info			Not Chngd	N/A	---
Sample Status				ABNORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	---




WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		24	16	---
Iron	ppm	ASTM D5185m	>750	112	59	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	0	2	---
Lead	ppm	ASTM D5185m	>49	▲ 67	13	---
Copper	ppm	ASTM D5185m	>101	▲ 115	93	---
Tin	ppm	ASTM D5185m	>10	1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	3	1	---
Barium	ppm	ASTM D5185m	0	2	14	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		3	2	---
Magnesium	ppm	ASTM D5185m	145	90	93	---
Calcium	ppm	ASTM D5185m	3570	3222	3534	---
Phosphorus	ppm	ASTM D5185m	1290	1014	1090	---
Zinc	ppm	ASTM D5185m	1640	1130	1257	---
Sulfur	ppm	ASTM D5185m		3498	4671	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>31	5	4	---
Sodium	ppm	ASTM D5185m	>51	7	5	---
Potassium	ppm	ASTM D5185m	>20	0	5	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---





OIL ANALYSIS REPORT

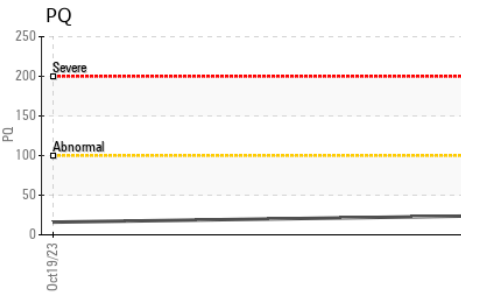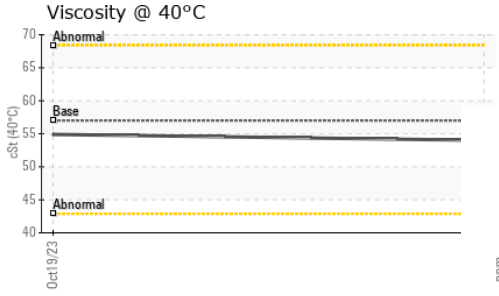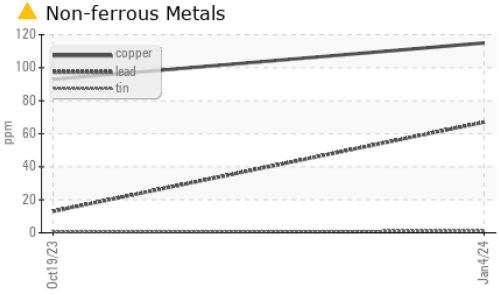

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	54.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

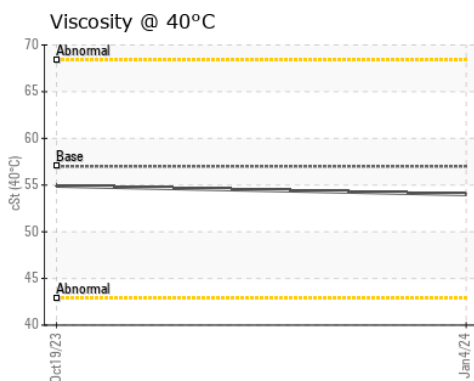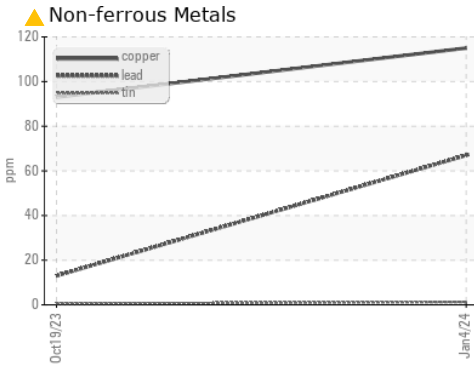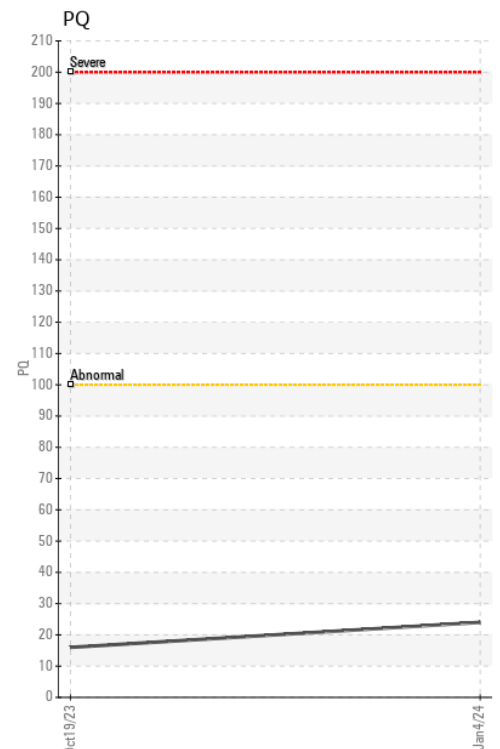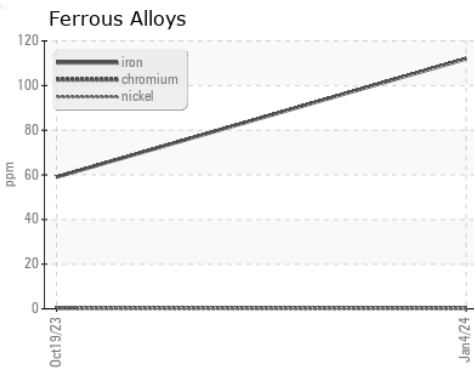

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200283 **Received** : 09 Jan 2024
Lab Number : 06055578 **Diagnosed** : 10 Jan 2024
Unique Number : 10821527 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)