



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id  
**JLG RT4769 PL3536**  
 Component  
**Hydraulic System**  
 Fluid  
**TDH FLUID SAE 75W80 (--- QTS)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>HPL0003951</b>	---	---
Sample Date	Client Info		<b>08 Jan 2024</b>	---	---
Machine Age	hrs	Client Info	<b>326</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>7</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >75	<b>4</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---





ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 10	<b>115</b>	---	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 10	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 100	<b>13</b>	---	---
Calcium	ppm	ASTM D5185m 3500	<b>3331</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1157</b>	---	---
Zinc	ppm	ASTM D5185m 1150	<b>1280</b>	---	---
Sulfur	ppm	ASTM D5185m 5000	<b>2901</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>13</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 135949</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 42211</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>116</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>11</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 24/23/14</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.25	<b>1.09</b>	---	---

# OIL ANALYSIS REPORT

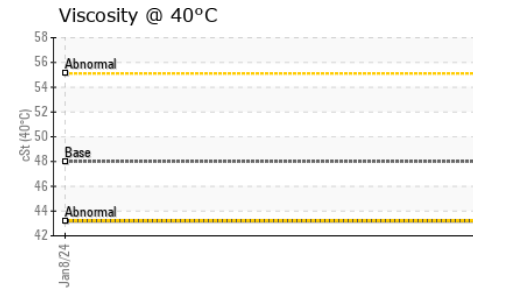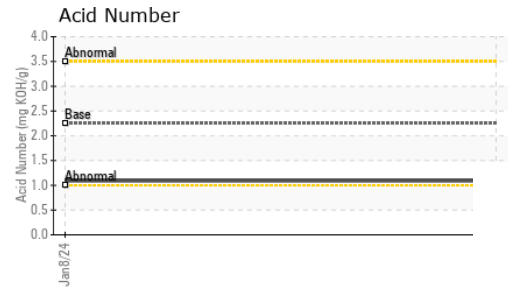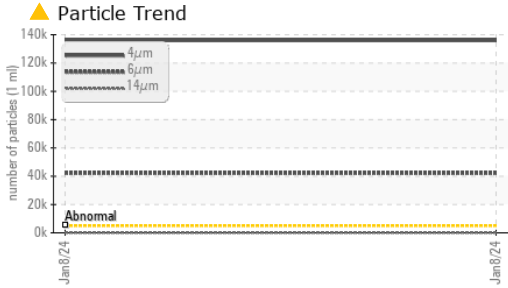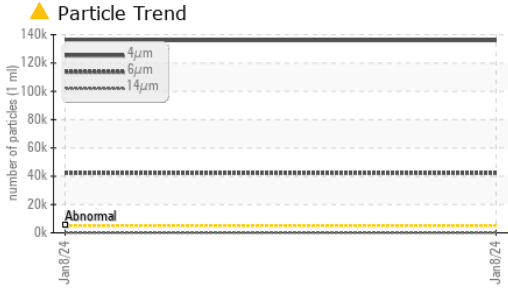





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 48	43.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

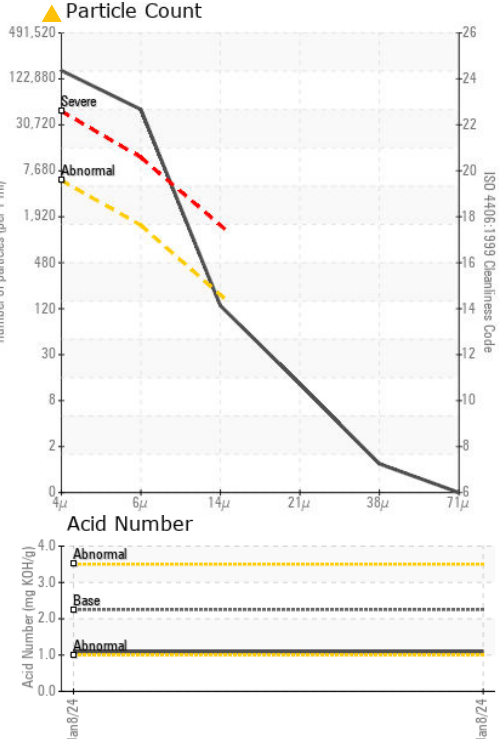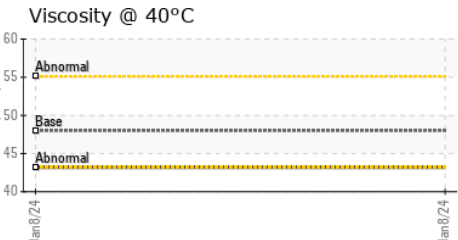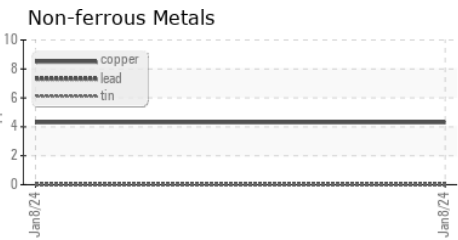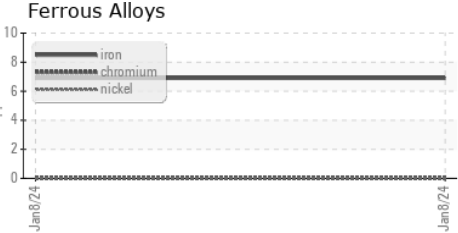

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0003951 **Received** : 09 Jan 2024  
**Lab Number** : 06055879 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821828 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440  
 Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com  
 T: (630)972-9199  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)