


## **OIL ANALYSIS REPORT**

## GP-212 B69086 - PUMP VACUUM BUSCH RA 1000 SOMME 5 (S/N 0H03680101) Component

Pump Fluid

## PETRO CANADA PURITY FG SYNTHETIC 100 (--- QTS)




DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		WC0880580	WC0855967	WC0842517
e recommend you service the filters on this	Sample Date		Client Info		31 Dec 2023	22 Nov 2023	12 Sep 2023
mponent if applicable. Resample at the next	Machine Age	hrs	Client Info		0	0	0
rvice interval to monitor.	Oil Age	hrs	Client Info		127	0	0
ear	Oil Changed		Client Info		N/A	Not Changd	Not Changd
component wear rates are normal.	Sample Status				ABNORMAL	NORMAL	NORMAL
Contamination ere is a high amount of particulates present in	CONTAMINATIC	N	method	limit/base	current	history1	history2
oil.	Water		WC Method	>.1	NEG	NEG	NEG
id Condition AN level is acceptable for this fluid. The	WEAR METALS		method	limit/base	current	history1	history2
condition of the oil is suitable for further service.	Iron	ppm	ASTM D5185m	>90	0	0	0
	Chromium	ppm	ASTM D5185m		0	0	0
	Nickel	ppm	ASTM D5185m	>5	0	0	0
	Titanium	ppm	ASTM D5185m	>3	0	0	0
	Silver	ppm	ASTM D5185m	>3	0	0	0
	Aluminum	ppm	ASTM D5185m	>7	0	1	3
	Lead	ppm	ASTM D5185m	>12	0	0	0
	Copper	ppm	ASTM D5185m	>30	0	0	0
	Tin	ppm	ASTM D5185m		0	0	0
	Vanadium	ppm	ASTM D5185m		0	0	0
	Cadmium	ppm	ASTM D5185m		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		0	0	0
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		0	0	0
	Manganese	ppm	ASTM D5185m		0	0	0
	Magnesium	ppm	ASTM D5185m		0	0	<1
	Calcium	ppm	ASTM D5185m		0	0	0
	Phosphorus	ppm	ASTM D5185m		411	477	536
	Zinc	ppm	ASTM D5185m		0	0	0
	Sulfur	ppm	ASTM D5185m		1052	1355	1786
	CONTAMINANT		method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m		0	1	<1
	Sodium		ASTM D5185m		0	0	2
	Potassium	ppm	ASTM D5185m	>20	0	1	0
	FLUID CLEANLI		method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647	>10000	<b>14286</b>	663	163
	Particles >6µm		ASTM D7647		<b>5486</b>	126	43
	Particles >14µm		ASTM D7647		<u> </u>	7	5
	Particles >21µm		ASTM D7647		66	1	2
	Particles >38µm		ASTM D7647		0	0	0
	Particles >71µm		ASTM D7647		0	0	0
	Oil Cleanliness		ISO 4406 (c)		A 21/20/16	17/14/10	15/13/10
	FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g	ASTM D8045		0.08	0.17	0.13
		ing itoriy		5.0	0.00	0.17	0.10


Report Id: HORAUS [WUSCAR] 06055888 (Generated: 01/10/2024 21:09:24) Rev: 1


Contact/Location: RYAN LOWE - HORAUS




## **OIL ANALYSIS REPORT**










	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
	Free Water	scalar	*Visual		NEG	NEG	NEG
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	98.7	99.3	97.9	93.8
	SAMPLE IMAGES		method	limit/base	current	history1	history2
	Color						

Bottom

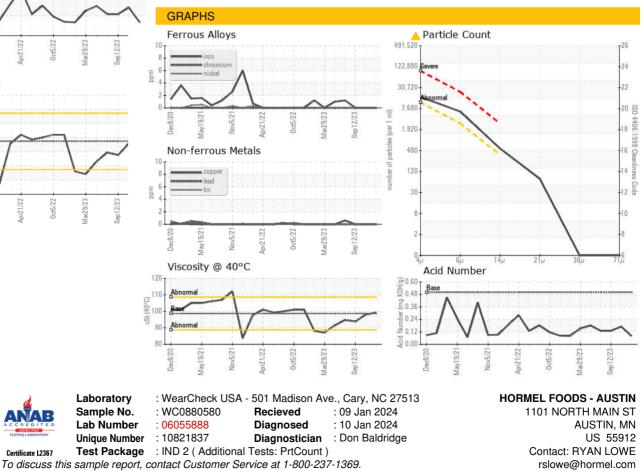

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: RYAN LOWE - HORAUS

T: (507)437-5674

F: (507)437-9805