




# OIL ANALYSIS REPORT

Sample Rating Trend

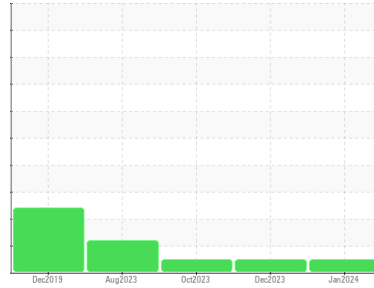

**NORMAL**



Area  
**Extrusion**  
 Machine Id  
**Press 5 Press Hydraulic Unit Oil (S/N 81546)**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (3487 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>RP0038250</b>	RP0038264	RP0038258
Sample Date	Client Info	<b>04 Jan 2024</b>	01 Dec 2023	13 Oct 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>3</b>	<1	3
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>6</b>	5	6
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	<b>10</b>	13	18
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 5	<b>14</b>	15	22
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 25	<b>25</b>	30	43
Calcium	ppm	ASTM D5185m 200	<b>111</b>	122	172
Phosphorus	ppm	ASTM D5185m 300	<b>376</b>	312	352
Zinc	ppm	ASTM D5185m 370	<b>370</b>	365	422

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	2
Water	%	ASTM D6304 >0.05	<b>0.017</b>	0.004	0.005
ppm Water	ppm	ASTM D6304 >500	<b>177</b>	40	51.0






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>607</b>	3316	2333
Particles >6µm	ASTM D7647 >1300	<b>195</b>	929	660
Particles >14µm	ASTM D7647 >160	<b>24</b>	81	105
Particles >21µm	ASTM D7647 >40	<b>7</b>	21	42
Particles >38µm	ASTM D7647 >10	<b>0</b>	1	4
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>16/15/12</b>	19/17/14	18/17/14

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.36</b>	0.27	0.43


# OIL ANALYSIS REPORT

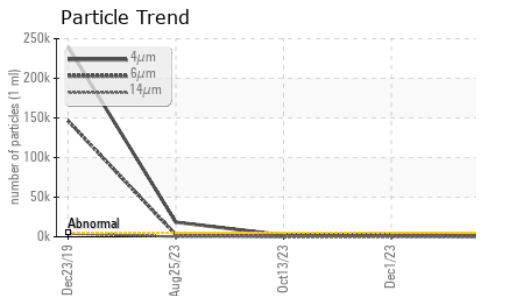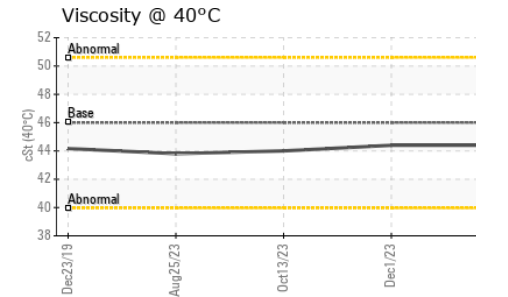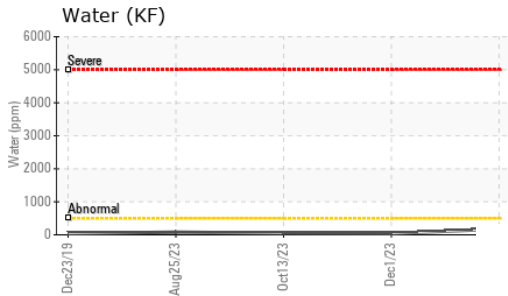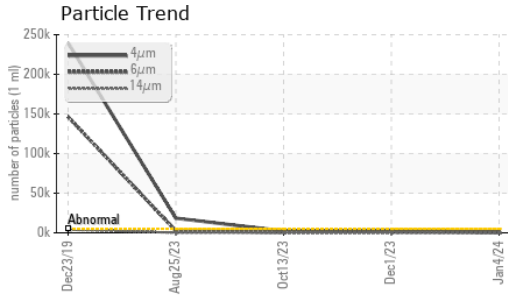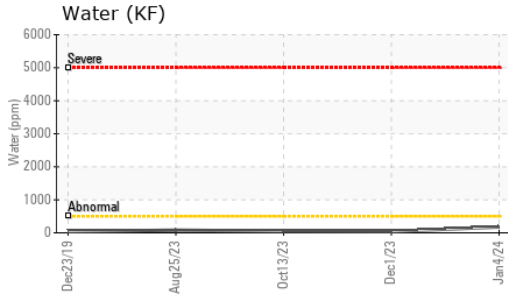






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.4	44.4	44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

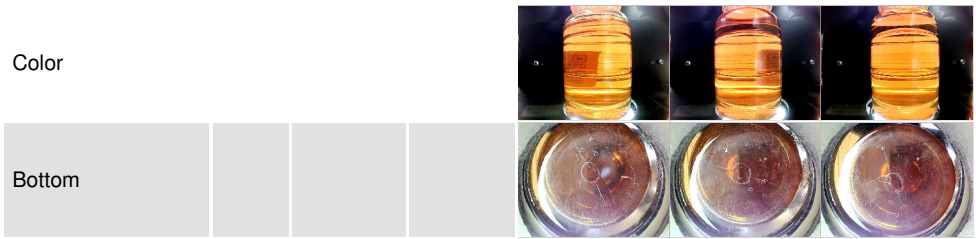

## GRAPHS

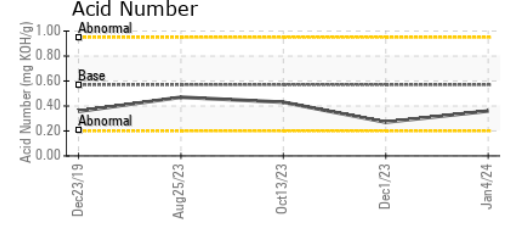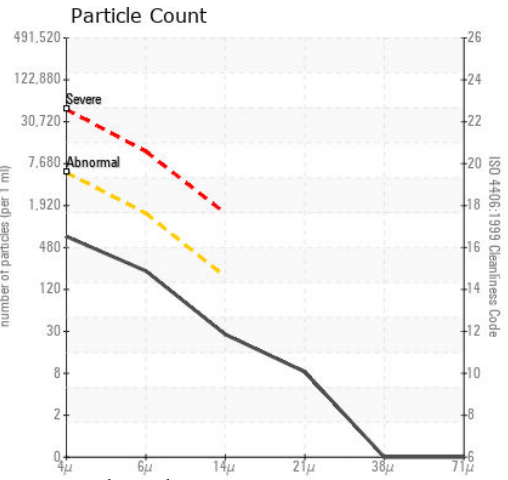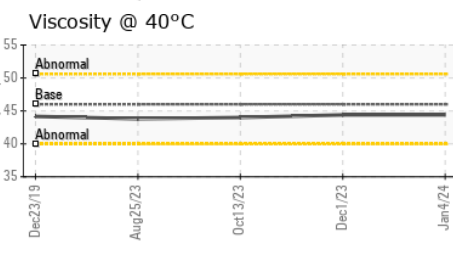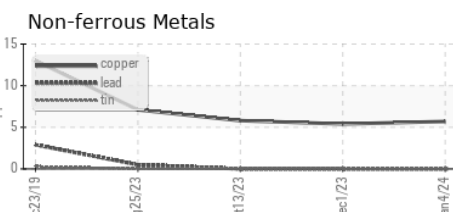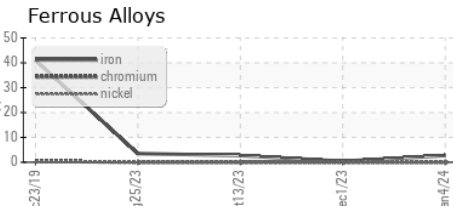

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0038250 **Received** : 09 Jan 2024  
**Lab Number** : 06055902 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821851 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**WESTERN EXTRUSIONS CORPORATION**  
 1735 SANDY LAKE RD  
 CARROLLTON, TX  
 US 75006  
 Contact: SCOTT WESTFALL  
 swestfall@WesternExtrusions.Com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)