

OIL ANALYSIS REPORT

Area Extrusion Machine Id Press 3 Press Hydraulic Unit (S/N 84356)

Component Hydraulic System

AW HYDRAULIC OIL ISO 46 (3962 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

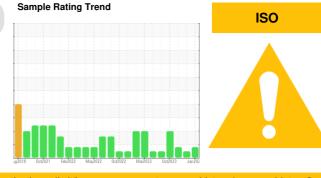



SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0038249	RP0029949	RP0038262
Sample Date		Client Info		04 Jan 2024	04 Dec 2023	01 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	0	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m		12	<1	12
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m	-	0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	pp		limit/base	-	-	-
		method		current	history1	history2
Boron	ppm	ASTM D5185m	5	<1	0	2
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	3	0	3
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	25	5	1	7
Calcium	ppm	ASTM D5185m	200	48	3	52
Phosphorus	ppm	ASTM D5185m	300	353	461	306
Zinc	ppm	ASTM D5185m	370	369	540	370
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	4	<1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.05	0.019	0.002	0.003
ppm Water	ppm	ASTM D6304	>500	196	24	26
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 26965	1472	▲ 23742
Particles >6µm		ASTM D7647	>1300	894	424	531
Particles >14µm		ASTM D7647	>160	28	31	13
Particles >21µm		ASTM D7647	>40	8	8	4
Particles >38µm		ASTM D7647	>10	1	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 22/17/12	18/16/12	▲ 22/16/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.33	0.46	0.33



OIL ANALYSIS REPORT

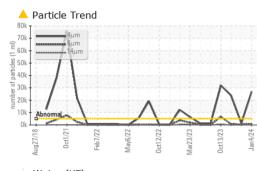

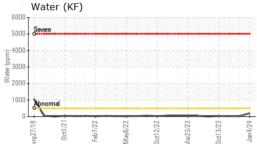

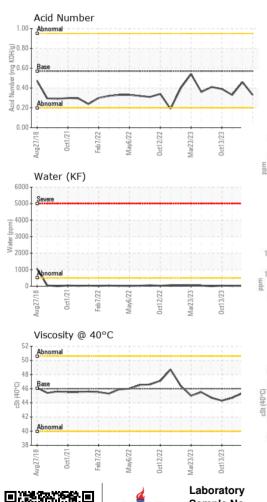


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	45.36	44.7
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Color



Bottom

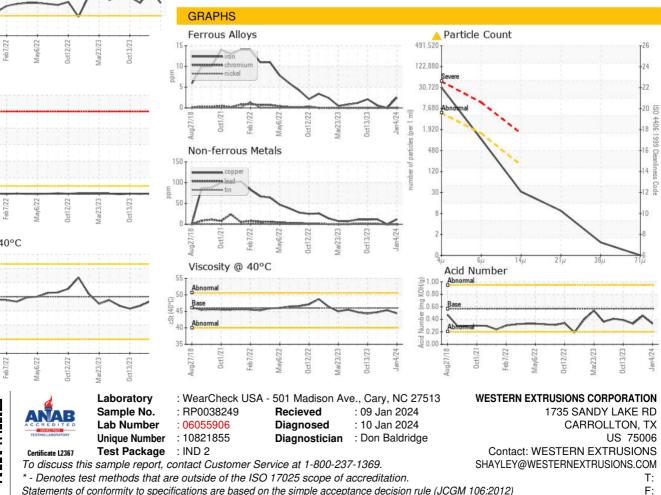

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Ø

Submitted By: WESTERN EXTRUSIONS