

### **OIL ANALYSIS REPORT**

#### Sample Rating Trend

ISO

# KAESER SK 15T 8121325 (S/N 1398)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			Nov2022	Jan2024		
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011963	KCP45893	
Sample Date		Client Info		04 Jan 2024	23 Nov 2022	
Machine Age	hrs	Client Info		11630	4026	
Oil Age	hrs	Client Info		0	4000	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	8	7	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	6	5	
Molybdenum	ppm	ASTM D5185m		0	0	
Vanganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	90	52	55	
Calcium	ppm	ASTM D5185m	2	0	<1	
Phosphorus	ppm	ASTM D5185m		0	10	
Zinc	ppm	ASTM D5185m		0	2	
Sulfur	ppm	ASTM D5185m		16448	21416	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	2	
Sodium	ppm	ASTM D5185m		15	15	
Potassium	ppm	ASTM D5185m	>20	3	10	
Water	%	ASTM D6304	>0.05	0.021	▲ 0.050	
opm Water	ppm	ASTM D6304	>500	219	▲ 502.5	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4558	26315	
Particles >6µm		ASTM D7647	>1300	<b>1784</b>	<b>1</b> 3591	
Particles >14µm		ASTM D7647	>80	<b>110</b>	▲ 869	
Particles >21µm		ASTM D7647	>20	13	<u> </u>	
Particles >38µm		ASTM D7647	>4	0	<b>6</b>	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>1</b> 9/18/14	<b>A</b> 22/21/17	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.32	
. ,	- 0					


Contact/Location: ADMIN ? - TOOMAR




Built for a lifetime."

## **OIL ANALYSIS REPORT**

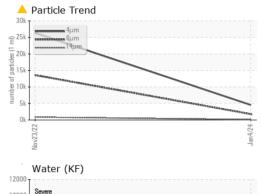

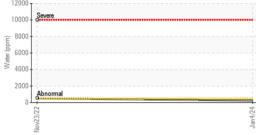

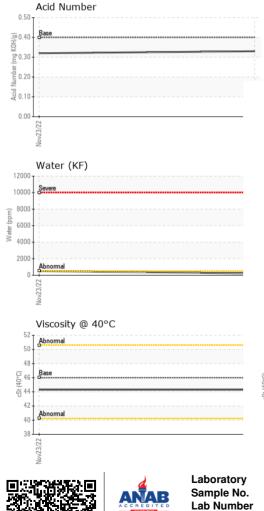

		method	limit/base	current	history1	history2
Vhite Metal	scalar	*Visual	NONE	NONE	LIGHT	
ellow Metal	scalar	*Visual	NONE	NONE	NONE	
recipitate	scalar	*Visual	NONE	NONE	NONE	
ilt	scalar	*Visual	NONE	NONE	NONE	
ebris	scalar	*Visual	NONE	NONE	LIGHT	
and/Dirt	scalar	*Visual	NONE	NONE	NONE	
ppearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
mulsified Water	scalar	*Visual	>0.05	NEG	NEG	
ree Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
′isc @ 40°C	cSt	ASTM D445	46	44.3	44.3	
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
olor						no image
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Count	t	
iron			491,520	I		T <sup>26</sup>
chromium			122,880			-24
						-22
			20.720			
			30,720	-		
			7,680			20
			7,680	•••		20
Vov23/22			7,680			20
	5		7,680		<b>`</b>	20
Nov23/22	5		7,680		•	-20 -18 -16 -14
Non-ferrous Metals	5		7,680 HZ/H Ladi 1,920 FZ/H Ladi sappled jo aquinu		••	-20 -18 -16 -14
Non-ferrous Metals	5		7,680		•	-20 -18 -16 -14
Non-ferrous Metals	5		7.680 b7/buer b2/buer back septement back septement			-20 -18 -16 -14
Non-ferrous Metals	5		7,680 F2/ hun 1,920 septied to 1,920 to 30 30 8	Boreemal		-20 -18 -16 -14 -12 -10
Non-ferrous Metals	5		7,680 F2/ hun 1,920 septied to 1,920 to 30 30 8			-20 -18 -16 -14 -14
Non-ferrous Metals	5		7.680 (Ter 1.30) 97/9 Ladi sap piped jo aa 120 30 8	<b>Bbree</b> mal μ 6μ	14μ 21μ	-20 -18 -16 -14 -12 -10
Non-ferrous Metals	5		7,680 HZ/Huer HZ/HU HZ/H	Boreemal <sup> </sup>		-20 -18 -18 -14 -12 -10 -8 -8
Non-ferrous Metals	5		7,680 HZ/Huer HZ/HU/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HZ	Boreemal <sup> </sup>		-20 -18 -16 -14 -12 -10 -8
Non-ferrous Metals	5		7,680 HZ/Huer HZ/HU/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HZ	Boreemal <sup> </sup>		-20 -18 -18 -14 -12 -10 -8 -8
Non-ferrous Metals	5		7,680 HZ/Huer HZ/HU/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HZ	Boreemal <sup> </sup>		-20 -18 -16 -14 -12 -10 -8
Non-ferrous Metals	5		7,680 HZ/Huer HZ/HU/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HU HZ/HZ	Boreemal <sup> </sup>		-20 -18 -16 -14 -12 -10 -8
Non-ferrous Metals	5		7,680 42/thurn 1,920 480 120 120 120 120 120 120 120 12	Bereenal Acid Number		-20 -18 -16 -14 -12 -10 
Non-ferrous Metals	5		7,680 1,920 HZ/Huer 1,920 HZ/Huer 1,920 480 120 30 47/Huer 120 30 480 480 30 480 480 30 480 480 30 480 30 480 480 30 480 480 30 480 30 480 480 30 480 30 480 480 30 480 480 30 480 480 30 480 480 30 480 480 30 480 480 30 480 480 30 480 480 480 30 480 480 30 480 480 30 480 480 480 30 480 480 480 480 480 480 480 48	Boreemal <sup> </sup>		-20 -18 -16 -14 -12 -10 -8

Certificate L2367 

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Unique Number : 10821861

Diagnostician : Don Baldridge

Contact/Location: ADMIN ? - TOOMAR

US 43040

T:

F:

Contact: ADMIN

admin@tooltechohio@com