

### **OIL ANALYSIS REPORT**

# KAESER ESD 300 5461382 (S/N 1162)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### A Wear


An increase in the iron level is noted. All other component wear rates are normal.

#### Contamination

There is a moderate amount of visible silt present in the sample.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

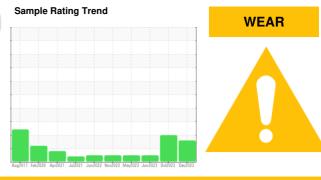



SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010153	KCP33375	KCP53209
Sample Date		Client Info		18 Dec 2023	16 Oct 2023	16 Jun 2023
Machine Age	hrs	Client Info		60000	68160	65299
Oil Age	hrs	Client Info		0	3500	4550
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>4</b> 1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		25	33	8
Tin	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m	210	0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	0	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	4
Zinc	ppm	ASTM D5185m		0	0	12
Sulfur	ppm	ASTM D5185m		9678	10615	18431
CONTAMINANTS		method	limit/base	current	history1	history2
		ASTM D5185m		0		1
Silicon	ppm		>20	0 <1	0	<1
Sodium	ppm	ASTM D5185m	00			< 1
Potassium	ppm	ASTM D5185m		0	0	
Water ppm Water	% ppm	ASTM D6304 ASTM D6304		0.00 0	0.010 109	0.005 56.3
FLUID CLEANLIN						
Particles >4µm		method ASTM D7647	limit/base	current	history1 196636	history2 1907
		ASTM D7647 ASTM D7647	<1300		▲ 79045	341
Particles >6µm Particles >14µm						
		ASTM D7647	>80		▲ 6187	23
Particles >21µm		ASTM D7647			▲ 1194	8
Particles >38µm		ASTM D7647	>4		▲ 9 0	1
Particles >71µm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>3 >/17/13		0	0 18/16/12
FLUID DEGRADA		method	limit/base	current	history1	history2
						0.48
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.36	0.35	0.40




## **OIL ANALYSIS REPORT**

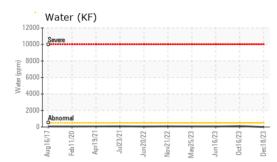

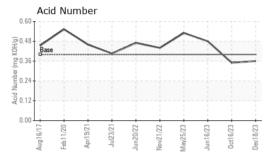


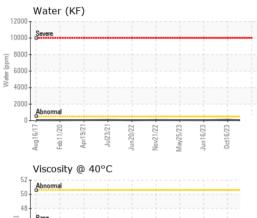




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	A MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.8	44.4	44.6
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

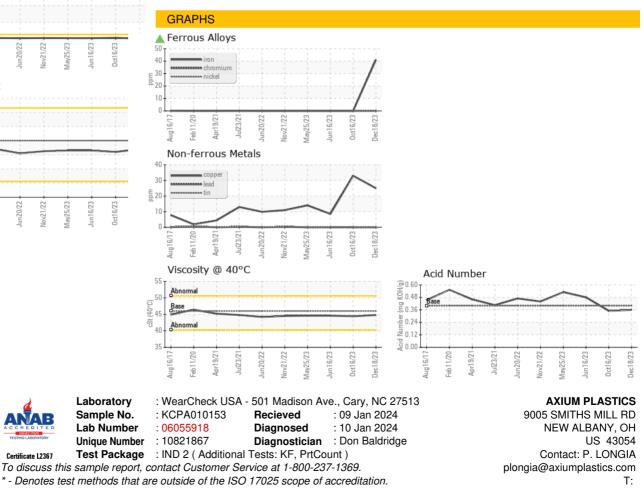

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: P. LONGIA - AXINEW

F: