



OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
[CONHER]
 Machine Id
CATERPILLAR Pisa 4 Aux-1 - Pacifico Industrial
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (30 LTR)



DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0013447	---	---
Sample Date	Client Info		13 Dec 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >105	13	---	---
Chromium	ppm	ASTM D5185m >5	<1	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m >2	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >10	1	---	---
Lead	ppm	ASTM D5185m >15	0	---	---
Copper	ppm	ASTM D5185m >140	1	---	---
Tin	ppm	ASTM D5185m >4	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	3	---	---
Barium	ppm	ASTM D5185m 0.4	0	---	---
Molybdenum	ppm	ASTM D5185m 250	19	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m 0	930	---	---
Calcium	ppm	ASTM D5185m 2046	1602	---	---
Phosphorus	ppm	ASTM D5185m 1043	952	---	---
Zinc	ppm	ASTM D5185m 943	1121	---	---
Sulfur	ppm	ASTM D5185m 5012	3477	---	---

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	14	---	---
Sodium	ppm	ASTM D5185m	5	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	3.9	---	---
Sulfation	Abs.1mm	*ASTM D7415 >30	13.6	---	---



OIL ANALYSIS REPORT

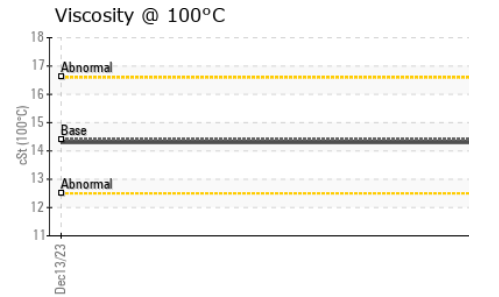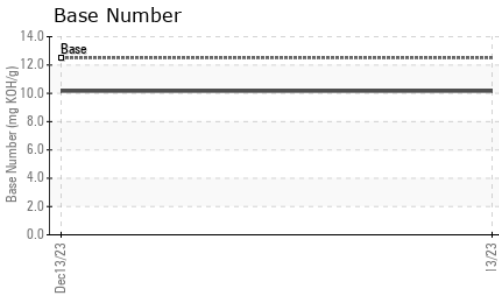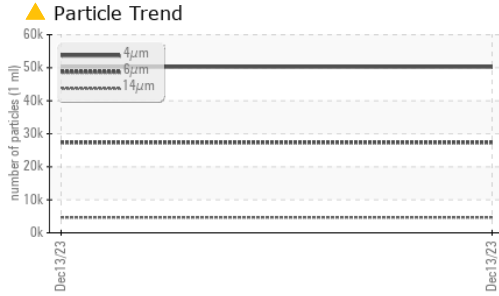



FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		50241	---	---
Particles >6µm	ASTM D7647	>5000	▲ 27369	---	---
Particles >14µm	ASTM D7647	>640	▲ 4658	---	---
Particles >21µm	ASTM D7647	>160	▲ 1569	---	---
Particles >38µm	ASTM D7647	>40	▲ 242	---	---
Particles >71µm	ASTM D7647	>10	▲ 25	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 22/19	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	7.2	---	---
Base Number (BN)	mg KOH/g ASTM D2896	12.5	10.16	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	---	---
Yellow Metal	scalar *Visual	NONE	NONE	---	---
Precipitate	scalar *Visual	NONE	NONE	---	---
Silt	scalar *Visual	NONE	NONE	---	---
Debris	scalar *Visual	NONE	NONE	---	---
Sand/Dirt	scalar *Visual	NONE	NONE	---	---
Appearance	scalar *Visual	NORML	NORML	---	---
Odor	scalar *Visual	NORML	NORML	---	---
Emulsified Water	scalar *Visual	>0.2	NEG	---	---
Free Water	scalar *Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	14.3	---	---

GRAPHS

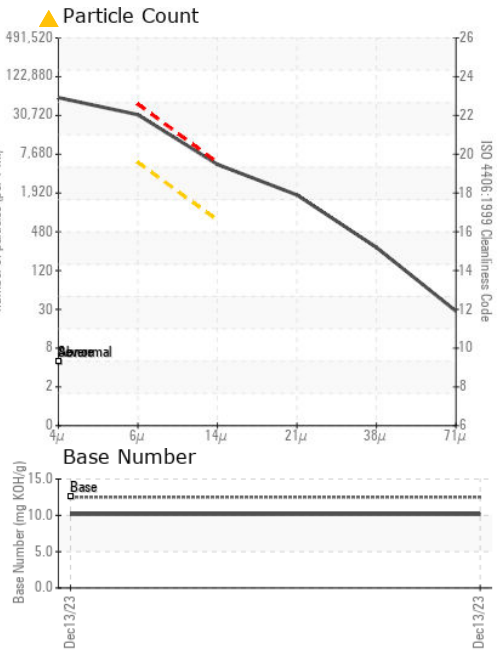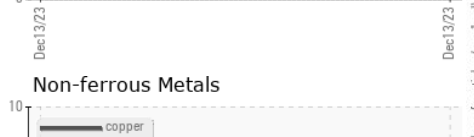

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013447 **Received** : 09 Jan 2024
Lab Number : 06055991 **Diagnosed** : 11 Jan 2024
Unique Number : 10821940 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)