




# OIL ANALYSIS REPORT



Area  
**GUAY SON/Yavaros [CONHER]**  
 Machine Id  
**CATERPILLAR Pacifico Ind Admiralty Aux**  
 Component  
**Auxiliary Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (25 LTR)**

Sample Rating Trend

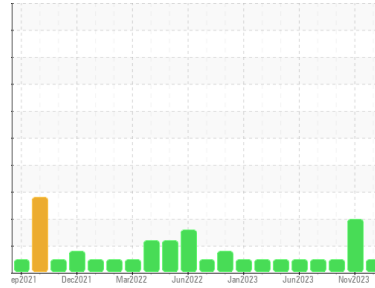

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0013442</b>	KL0013391	KL0013298
Sample Date	Client Info		<b>21 Dec 2023</b>	17 Nov 2023	16 Oct 2023
Machine Age	hrs	Client Info	<b>5893</b>	0	0
Oil Age	hrs	Client Info	<b>193</b>	95	120
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>3</b>	6	7
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	3	12
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>296</b>	367	353
Barium	ppm	ASTM D5185m	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	<b>124</b>	125	120
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>641</b>	617	627
Calcium	ppm	ASTM D5185m	<b>1468</b>	1481	1523
Phosphorus	ppm	ASTM D5185m 1360	<b>705</b>	652	647
Zinc	ppm	ASTM D5185m 1480	<b>807</b>	775	875
Sulfur	ppm	ASTM D5185m	<b>2380</b>	2502	2387

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	11	9
Sodium	ppm	ASTM D5185m	<b>1</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	<1


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.1</b>	5.4	5.5
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>22.8</b>	22.5	22.5




# OIL ANALYSIS REPORT


Particle Trend

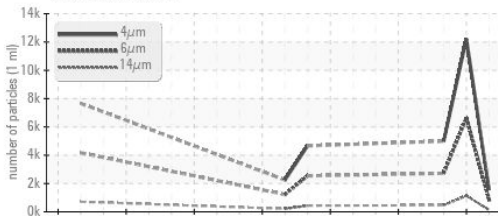


Base Number

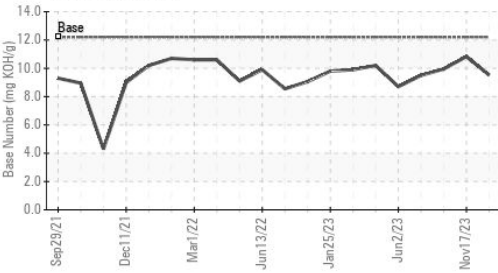

Viscosity @ 100°C

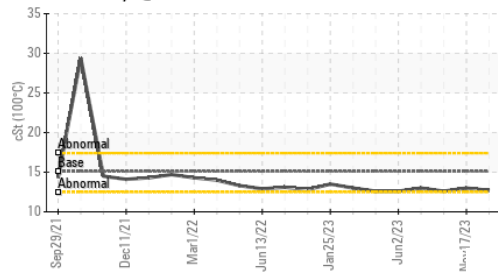

Particle Trend

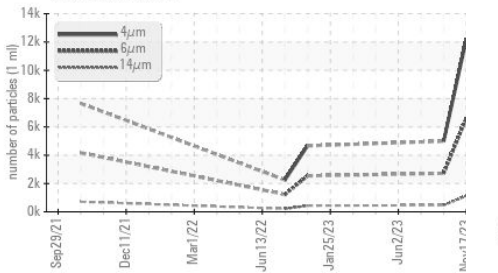

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>1557</b>	12206	4994
Particles >6µm	ASTM D7647	>5000	<b>848</b>	▲ 6649	2720
Particles >14µm	ASTM D7647	>640	<b>144</b>	▲ 1132	463
Particles >21µm	ASTM D7647	>160	<b>49</b>	▲ 381	156
Particles >38µm	ASTM D7647	>40	<b>8</b>	▲ 59	24
Particles >71µm	ASTM D7647	>10	<b>1</b>	6	2
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>17/14</b>	▲ 20/17	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>16.2</b>	15.7	15.7
Base Number (BN)	mg KOH/g ASTM D2896	12.2	<b>9.53</b>	10.83	9.95

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.1	<b>12.7</b>	13.0	12.6

GRAPHS


Ferrous Alloys

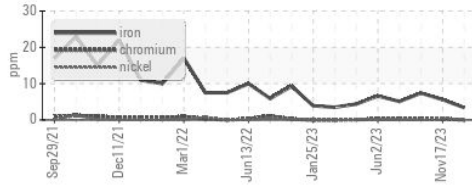


Non-ferrous Metals

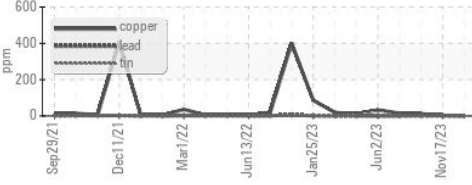


Viscosity @ 100°C

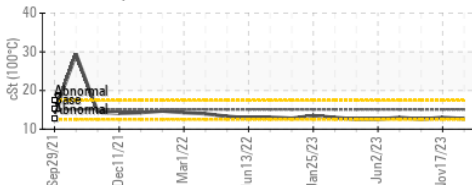

Particle Count

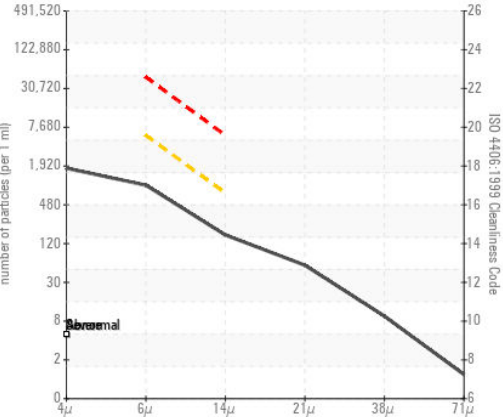

Base Number

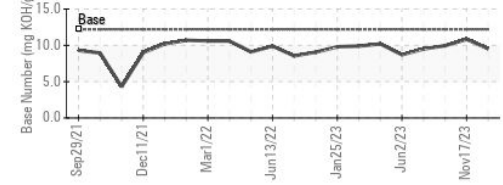

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013442 **Received** : 09 Jan 2024  
**Lab Number** : 06055994 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10821943 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)