



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
39601
Component
Diesel Engine
Fluid
{not provided} (--- QTS)



DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL0026009	---	---
Sample Date	Client Info		04 Jan 2024	---	---
Machine Age	mls Client Info		11394	---	---
Oil Age	mls Client Info		11394	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100	44	---	---
Chromium	ppm ASTM D5185m	>20	1	---	---
Nickel	ppm ASTM D5185m	>4	0	---	---
Titanium	ppm ASTM D5185m		0	---	---
Silver	ppm ASTM D5185m	>3	0	---	---
Aluminum	ppm ASTM D5185m	>20	20	---	---
Lead	ppm ASTM D5185m	>40	0	---	---
Copper	ppm ASTM D5185m	>330	64	---	---
Tin	ppm ASTM D5185m	>15	<1	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		37	---	---
Barium	ppm ASTM D5185m		2	---	---
Molybdenum	ppm ASTM D5185m		45	---	---
Manganese	ppm ASTM D5185m		5	---	---
Magnesium	ppm ASTM D5185m		833	---	---
Calcium	ppm ASTM D5185m		1168	---	---
Phosphorus	ppm ASTM D5185m		755	---	---
Zinc	ppm ASTM D5185m		904	---	---
Sulfur	ppm ASTM D5185m		2275	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	23	---	---
Sodium	ppm ASTM D5185m		5	---	---
Potassium	ppm ASTM D5185m	>20	59	---	---
Fuel	% ASTM D3524	>5	0.3	---	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm *ASTM D7624	>20	10.0	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	20.5	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	19.1	---	---
Base Number (BN)	mg KOH/g ASTM D2896		7.7	---	---







OIL ANALYSIS REPORT

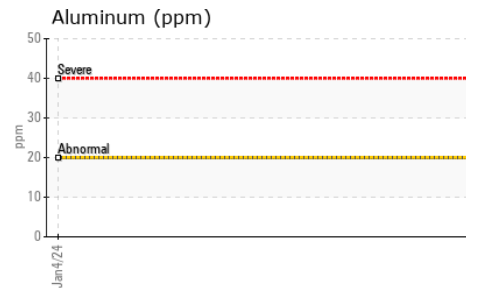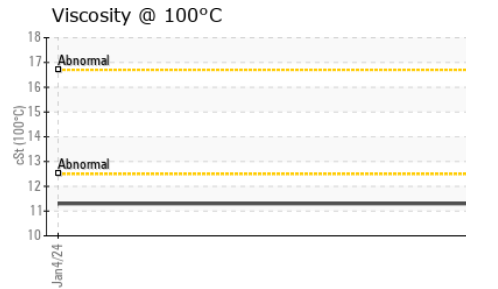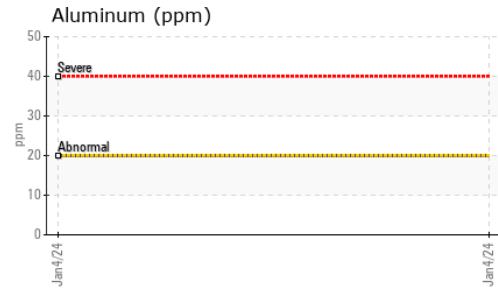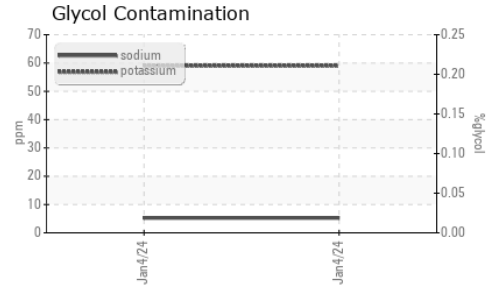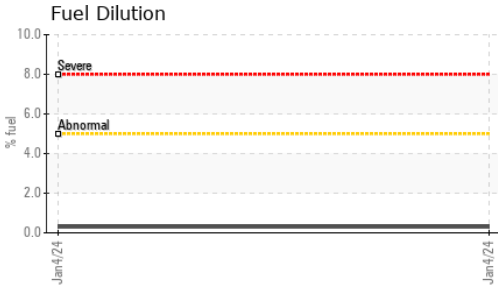

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.3	---	---

GRAPHS

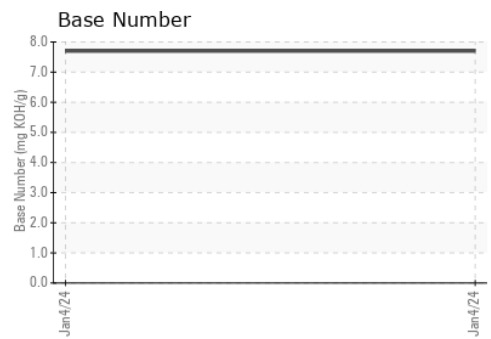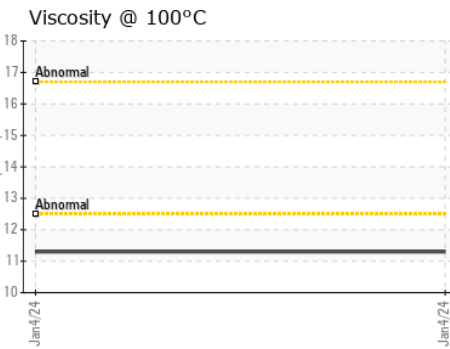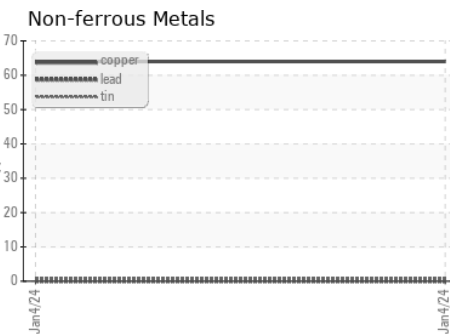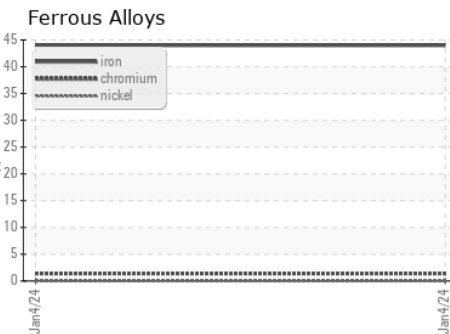

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0026009 **Received** : 10 Jan 2024
Lab Number : 06056383 **Diagnosed** : 14 Jan 2024
Unique Number : 10822332 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

WIELAND IDEALEASE
 430 MIDLAND RD.
 BAY CITY, MI
 US 45601
 Contact: BILL FLETCHER
 billfletcher@wielandtrucks.com
 T:
 F: (989)790-7911

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)