

OIL ANALYSIS REPORT

3400 (75) - DUAL SHEAR (S/N S0305)

Right Gearbox

CHEVRON MEROPA 220 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sample Rating Tre		ISO
	_	<u> </u>

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		Y2K0001711		
Sample Number		Client Info		02 Jan 2024		
Machine Age	hrs	Client Info		2400		
Oil Age	hrs	Client Info		2400		
Oil Changed	1113	Client Info		Not Changd		
Sample Status		Olletti IIIIO		ABNORMAL		
		and the section	11 11/1			
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	4		
Chromium	ppm	ASTM D5185m	>15	0		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	0		
Tin	ppm	ASTM D5185m	>25	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	40	30		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		17		
Phosphorus	ppm	ASTM D5185m	270	245		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	8600	7437		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.2	0.010		
ppm Water	ppm	ASTM D6304	>2000	107		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>20000	93070		
Particles >6µm		ASTM D7647	>5000	15896		
Particles >14μm		ASTM D7647	>640	408		
Particles >21µm		ASTM D7647	>160	84		
Particles >38μm		ASTM D7647	>40	4		
Particles >71µm		ASTM D7647	>10	1		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u>4</u> 24/21/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
		ASTM D8045		0.70		


Acid Number (AN)

mg KOH/g ASTM D8045 0.64

0.70



OIL ANALYSIS REPORT

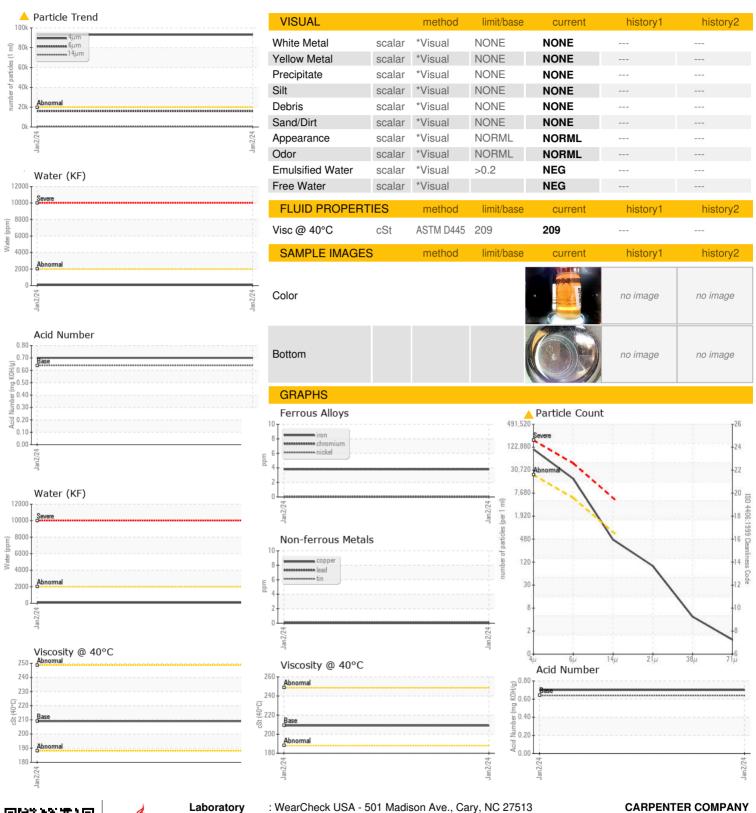





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: Y2K0001711 . 06056642 : 10822591

Recieved Diagnosed

: 10 Jan 2024 : 11 Jan 2024 Diagnostician : Wes Davis

Test Package : MOB 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

7809 LINCOLN AVE RIVERSIDE, CA US 92504

Contact: JOSE RUVALCABA jose.ruvalcaba@carpenter.com

T: 1(866)292-1303

F: