

OIL ANALYSIS REPORT

Machine Id KAESER DSD 150 7062457 (S/N 1089) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

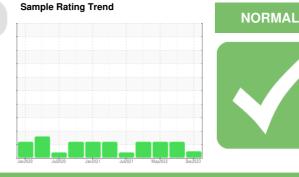






SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC124616	KC112029	KC97299
Sample Date		Client Info		11 Dec 2023	05 Jun 2023	12 May 2022
Machine Age	hrs	Client Info		11575	10272	7326
Oil Age	hrs	Client Info		0	0	1351
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	5	<1	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	<1	<1	23
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		4	359	4
Zinc	ppm	ASTM D5185m		0	36	9
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	0	0	<1
Sodium	ppm	ASTM D5185m	220	2	1	4
Potassium	ppm	ASTM D5185m	>20	_ <1	<1	2
Water	%	ASTM D510011		0.008	0.009	0.011
ppm Water	ppm		>500	86	93.6	114.0
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		6602	3317	8661
Particles >6µm		ASTM D7647 ASTM D7647	>1300	1278	984	▲ 2221
Particles >14µm		ASTM D7647 ASTM D7647	>80	51	150	129
Particles >21µm		ASTM D7647 ASTM D7647		10	▲ 150 ▲ 49	129
Particles >38µm		ASTM D7647 ASTM D7647	>20	0	1	0
Particles >30µm		ASTM D7647 ASTM D7647	>4 >3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>3	0 20/17/13	▲ 19/17/14	20/18/14
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.40	0.62	0.44




OIL ANALYSIS REPORT

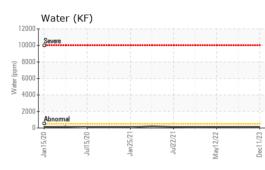

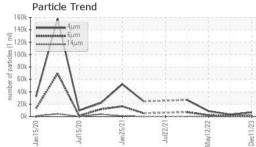


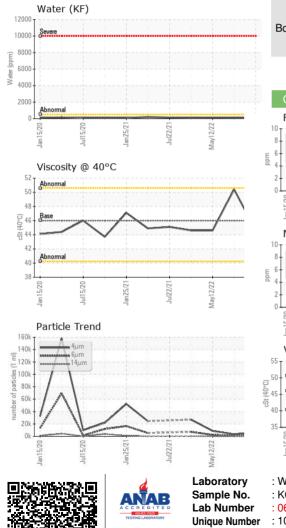

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	50.4	44.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						



Bottom

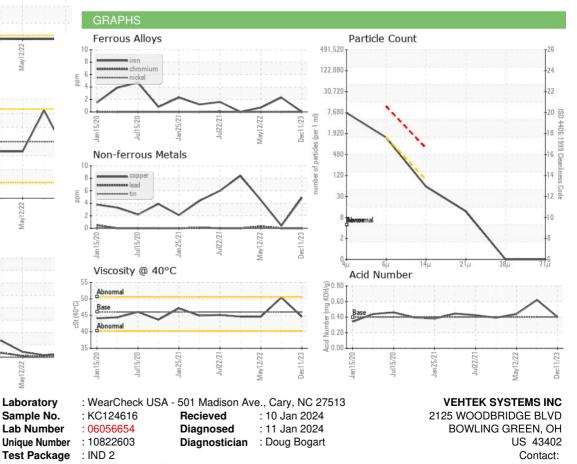

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: ? ? - VEHBOW

Page 2 of 2