

### **OIL ANALYSIS REPORT**

# KAESER AS 25 4289153 (S/N 1826)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

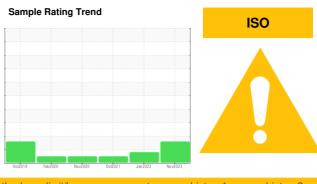

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005828	KCP47334D	KCP37891
Sample Date		Client Info		03 Nov 2023	23 Jan 2023	01 Oct 2021
Machine Age	hrs	Client Info		93724	2245	76071
Oil Age	hrs	Client Info		0	2245	6613
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead		ASTM D5185m	>10	0	0	0
	ppm			3	2	2
Copper	ppm					
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	12	29	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	50	57	10
Calcium	ppm	ASTM D5185m	0	0	2	0
Phosphorus	ppm	ASTM D5185m	0	4	6	0
Zinc	ppm	ASTM D5185m	0	6	6	0
Sulfur	ppm	ASTM D5185m	23500	18005	18342	13301
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		17	20	9
Potassium	ppm	ASTM D5185m	>20	3	4	0
Water	%	ASTM D6304	>0.05	0.017	0.004	0.015
ppm Water	ppm	ASTM D6304	>500	174	42.0	159.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9081	8249	614
Particles >6µm		ASTM D7647	>1300	<u> </u>	▲ 1824	158
Particles >14µm		ASTM D7647	>80	▲ 233	70	9
Particles >21µm		ASTM D7647	>20	▲ 42	13	0
Particles >38µm		ASTM D7647	>4	_ +₌ 1	1	0
Particles >71µm		ASTM D7647 ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	0 <u> </u> 20/19/15	20/18/13	14/10
	TION	( )				
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D80/5	10	0.40	0.30	0.31/

Acid Number (AN) mg KOH/g

mg KOH/g ASTM D8045 1.0


0.40 0.30 0.314 Contact/Location: Service Manager - IRVPON


Report Id: IRVPON [WUSCAR] 06056668 (Generated: 01/11/2024 15:02:49) Rev: 1


ion. Service Manager - IRVP




## **OIL ANALYSIS REPORT**

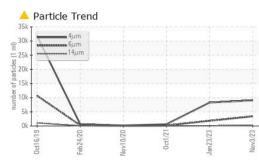

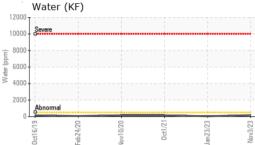


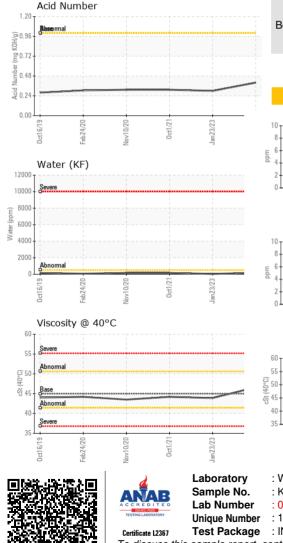

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.6	43.9	44.2
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						



Bottom

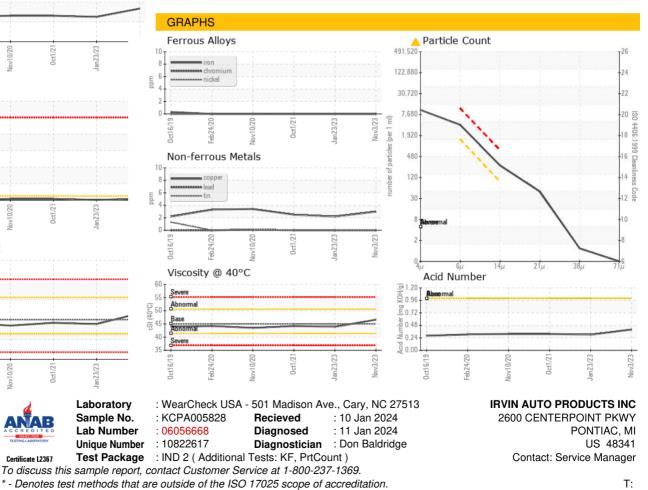

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - IRVPON