


# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

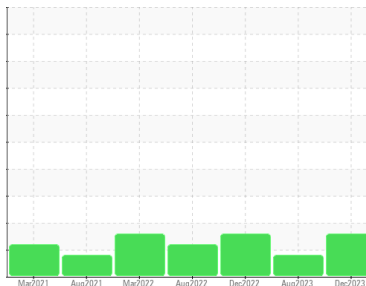

Machine Id  
**KAESER AS25 6950570 (S/N 1261)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC121105</b>	KC124465	KC100781
Sample Date	Client Info			<b>27 Dec 2023</b>	15 Aug 2023	01 Dec 2022
Machine Age	hrs	Client Info		<b>8453</b>	7310	5030
Oil Age	hrs	Client Info		<b>0</b>	0	819
Oil Changed	Client Info			<b>N/A</b>	N/A	Not Changd
Sample Status				<b>ABNORMAL</b>	MARGINAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>17</b>	▲ 40	3
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	24
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>43</b>	24	79
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	1
Phosphorus	ppm	ASTM D5185m		<b>4</b>	4	4
Zinc	ppm	ASTM D5185m		<b>105</b>	73	10

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>13</b>	5	26
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Water	%	ASTM D6304	>0.05	<b>0.015</b>	0.015	0.048
ppm Water	ppm	ASTM D6304	>500	<b>153</b>	153.9	480.9

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>27453</b>	249	27906
Particles >6µm		ASTM D7647	>1300	▲ <b>7185</b>	104	▲ 9268
Particles >14µm		ASTM D7647	>80	▲ <b>626</b>	18	▲ 400
Particles >21µm		ASTM D7647	>20	▲ <b>170</b>	7	▲ 46
Particles >38µm		ASTM D7647	>4	<b>4</b>	0	3
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>22/20/16</b>	15/14/11	▲ 22/20/16

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.453</b>	0.34	0.39

# OIL ANALYSIS REPORT

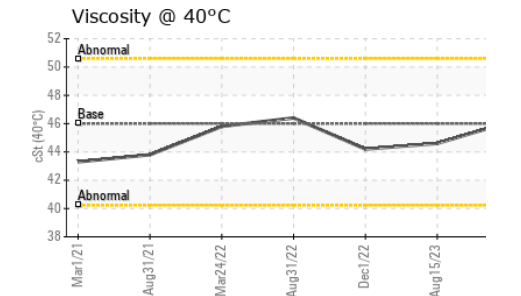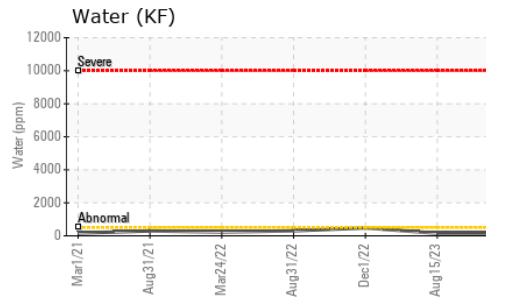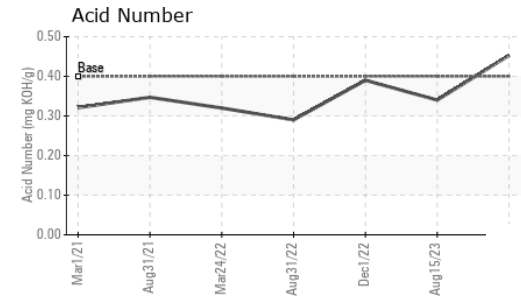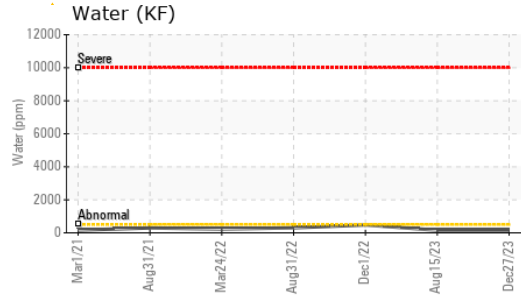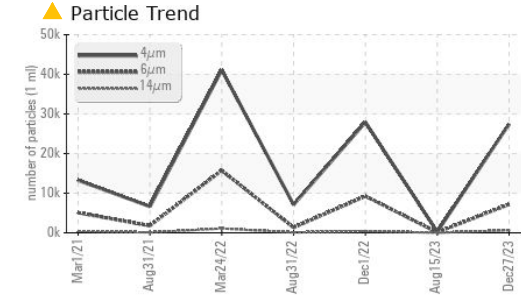





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.11	44.6	44.2

**SAMPLE IMAGES**

method	limit/base	current	history1	history2
Color				
Bottom				

**GRAPHS**

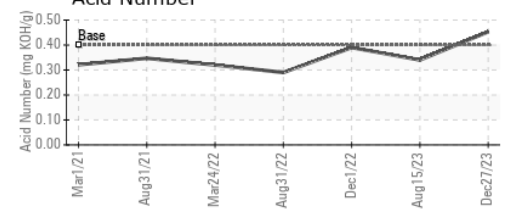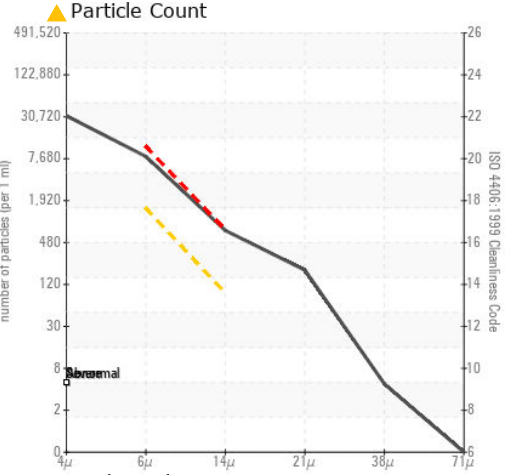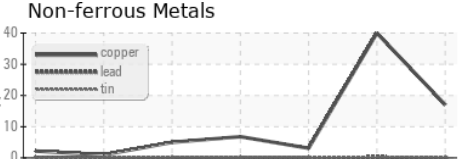

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC121105 **Received** : 10 Jan 2024  
**Lab Number** : 06056718 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10822667 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**HERTZFELD POULTRY FARMS**  
 15799 MILTON RD  
 GRAND RAPIDS, OH  
 US 43522  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)