




OIL ANALYSIS REPORT

Sample Rating Trend

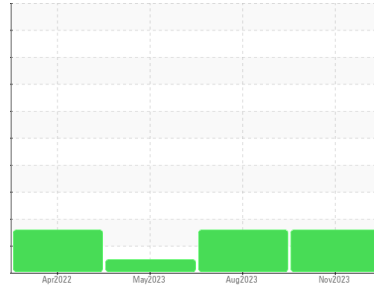

Machine Id
7947111 (S/N 1164)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of particulates present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC120250	KC101215	KC102371
Sample Date	Client Info	29 Nov 2023	24 Aug 2023	01 May 2023
Machine Age	hrs	20086	17762	15003
Oil Age	hrs	0	2759	6000
Oil Changed	Client Info	N/A	Not Changd	Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	0	0	<1
Chromium ppm	ASTM D5185m >10	0	0	0
Nickel ppm	ASTM D5185m >3	0	0	0
Titanium ppm	ASTM D5185m >3	0	0	0
Silver ppm	ASTM D5185m >2	0	0	0
Aluminum ppm	ASTM D5185m >10	0	<1	0
Lead ppm	ASTM D5185m >10	0	0	0
Copper ppm	ASTM D5185m >50	8	7	7
Tin ppm	ASTM D5185m >10	<1	0	0
Vanadium ppm	ASTM D5185m	0	0	0
Cadmium ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	0	0	0
Barium ppm	ASTM D5185m 90	0	0	0
Molybdenum ppm	ASTM D5185m	0	0	0
Manganese ppm	ASTM D5185m	<1	0	0
Magnesium ppm	ASTM D5185m 90	0	0	<1
Calcium ppm	ASTM D5185m 2	0	0	2
Phosphorus ppm	ASTM D5185m	4	0	1
Zinc ppm	ASTM D5185m	0	10	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	0	2	0
Sodium ppm	ASTM D5185m	0	1	0
Potassium ppm	ASTM D5185m >20	<1	0	0
Water %	ASTM D6304 >0.05	0.006	0.010	0.004
ppm Water	ASTM D6304 >500	67	100.1	43.1






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	69319	20974	5598
Particles >6µm	ASTM D7647 >1300	▲ 10683	▲ 6890	1282
Particles >14µm	ASTM D7647 >80	▲ 255	▲ 343	64
Particles >21µm	ASTM D7647 >20	▲ 43	▲ 76	17
Particles >38µm	ASTM D7647 >4	1	2	1
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 23/21/15	▲ 22/20/16	20/17/13

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.4	0.42	0.37	0.45

OIL ANALYSIS REPORT

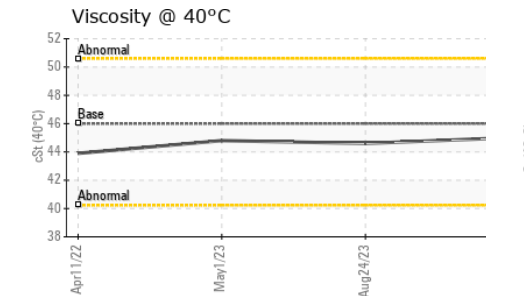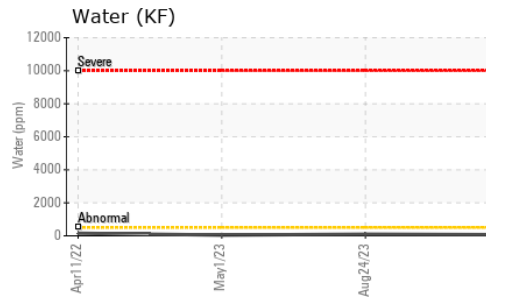
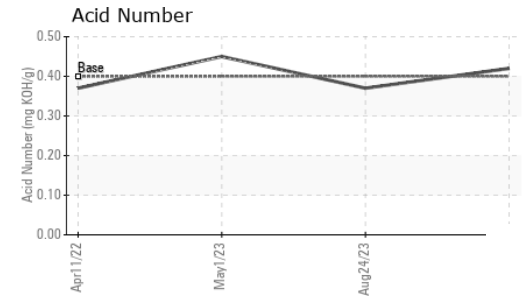
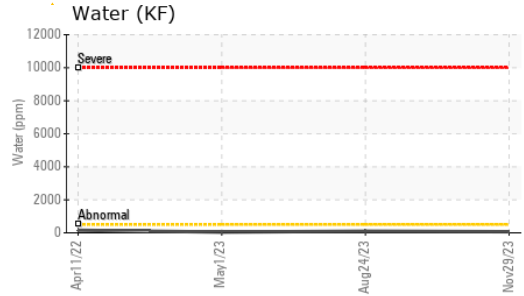
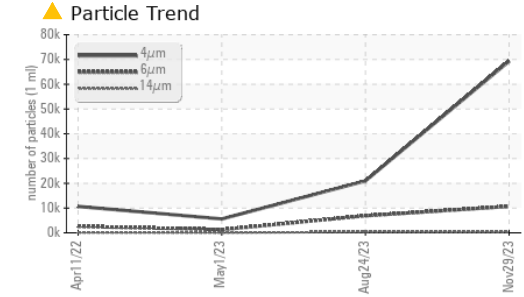


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.0	44.6	44.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

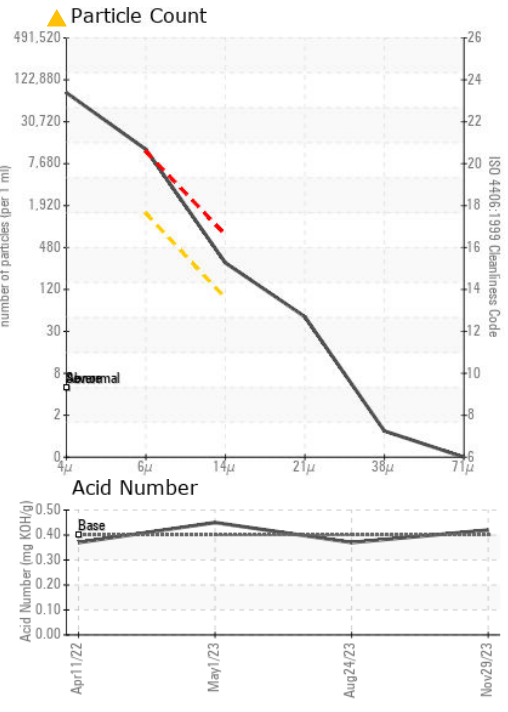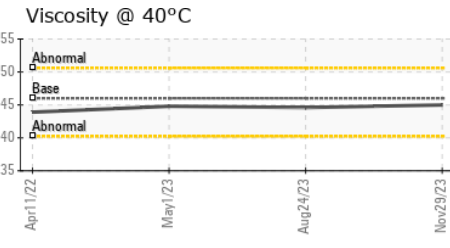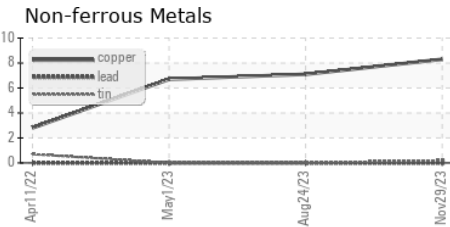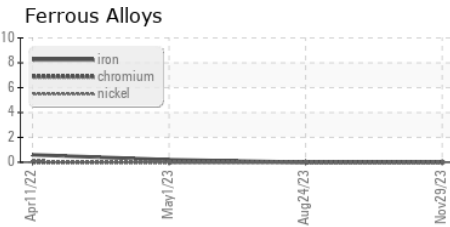

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC120250 **Received** : 10 Jan 2024
Lab Number : 06056734 **Diagnosed** : 11 Jan 2024
Unique Number : 10822683 **Diagnostician** : Doug Bogart
Test Package : IND 2

INTERNATIONAL EXTRUSIONS
 39001 SCHOOLCRAFT RD
 LIVONIA, MI
 US 48150
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: