




# OIL ANALYSIS REPORT

Sample Rating Trend

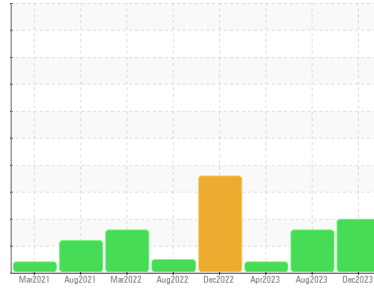

Machine Id  
**KAESER AS 25 6948816 (S/N 1259)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates to AN results.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC121111</b>	KC124470	KC111777
Sample Date	Client Info			<b>27 Dec 2023</b>	15 Aug 2023	18 Apr 2023
Machine Age	hrs	Client Info		<b>9081</b>	8791	8598
Oil Age	hrs	Client Info		<b>0</b>	0	700
Oil Changed	Client Info			<b>N/A</b>	N/A	Not Changd
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	2	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>13</b>	6	6
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	4	22
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>55</b>	52	69
Calcium	ppm	ASTM D5185m	2	<b>0</b>	6	<1
Phosphorus	ppm	ASTM D5185m		<b>4</b>	6	0
Zinc	ppm	ASTM D5185m		<b>79</b>	19	22

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>2</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>14</b>	13	21
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	7	6
Water	%	ASTM D6304	>0.05	<b>0.016</b>	▲ 0.246	0.037
ppm Water	ppm	ASTM D6304	>500	<b>163</b>	▲ 2460	371.6

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>42944</b>	2962	---
Particles >6µm		ASTM D7647	>1300	▲ <b>12168</b>	270	---
Particles >14µm		ASTM D7647	>80	▲ <b>1153</b>	12	---
Particles >21µm		ASTM D7647	>20	▲ <b>324</b>	3	---
Particles >38µm		ASTM D7647	>4	▲ <b>14</b>	0	---
Particles >71µm		ASTM D7647	>3	▲ <b>1</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>23/21/17</b>	19/15/11	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.463</b>	0.32	0.40


# OIL ANALYSIS REPORT

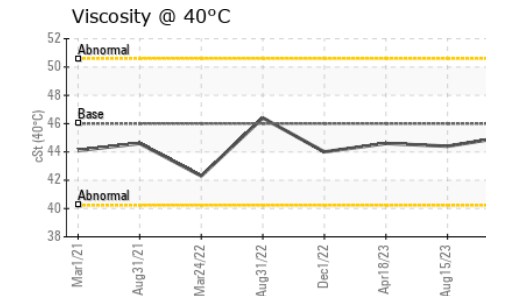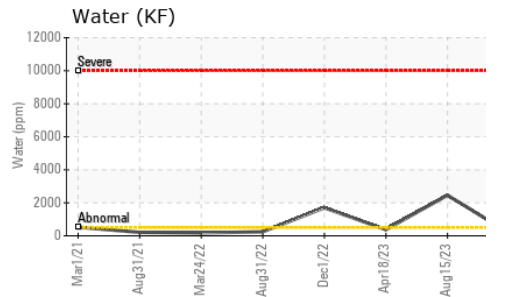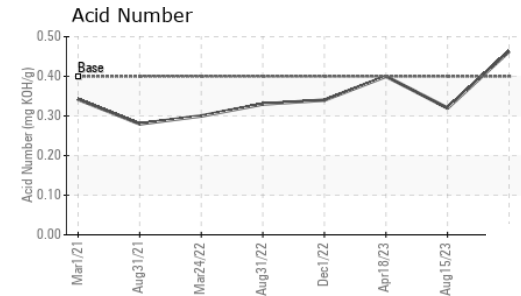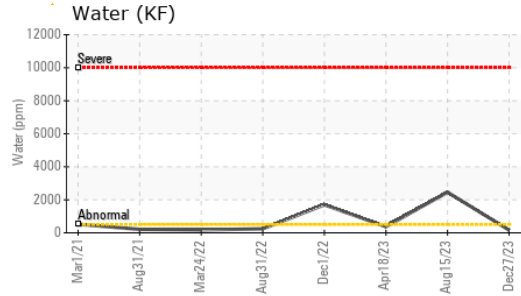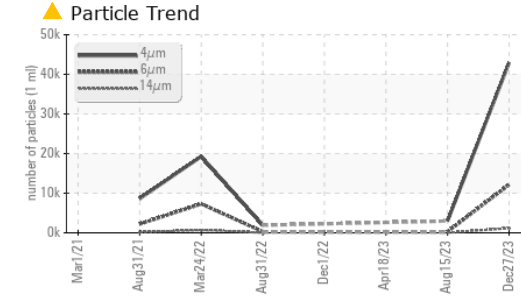






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.1	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

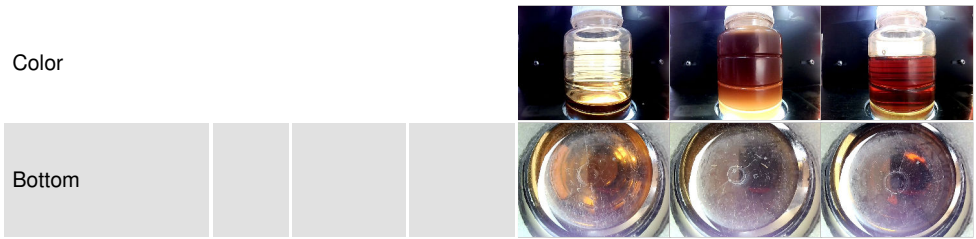

## GRAPHS

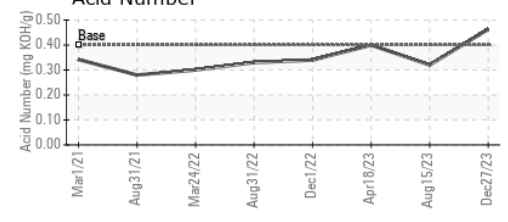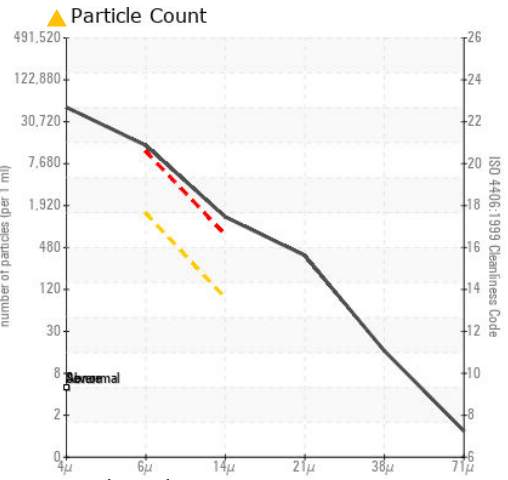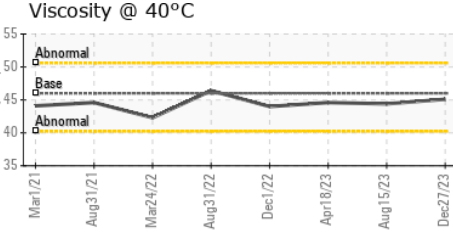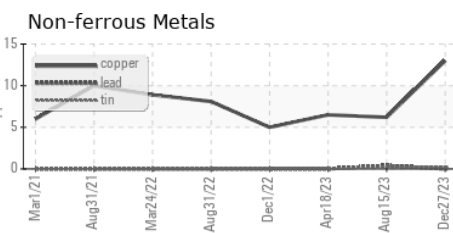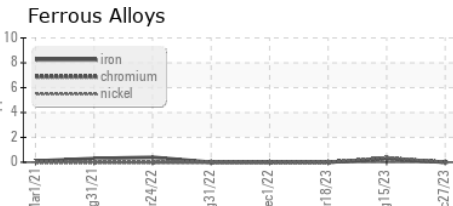

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC121111 **Received** : 10 Jan 2024  
**Lab Number** : 06056738 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10822687 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2

**HERTZFELD POULTRY FARMS**  
 15799 MILTON RD  
 GRAND RAPIDS, OH  
 US 43522  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: