

# **OIL ANALYSIS REPORT**



**VIS DEBRIS** 



# RC5 (500HP) (S/N 1057)

**Refrigeration Compressor** 

USPI 1009-68 SC (--- GAL)

## **DIAGNOSIS**

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

High concentration of visible dirt/debris present in the oil.


#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Jun2022 Sup2023 Jun2024						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0005295	USP0001905	USP229954
Sample Date		Client Info		01 Jan 2024	17 Sep 2023	27 Jun 2022
Machine Age	hrs	Client Info		62264	6089	0
Oil Age	hrs	Client Info		0	3004	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	2	13
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	<1	<1
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	1
Sulfur	ppm	ASTM D5185m	50	0	<1	12
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.004
ppm Water	ppm	ASTM D6304	>100	35	21.0	42.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000		<b>▲</b> 72540	<u> </u>
Particles >6µm		ASTM D7647	>2500		<b>2</b> 0489	<b>▲</b> 85365
Particles >14μm		ASTM D7647	>320		<b>△</b> 638	<b>▲</b> 3165
Particles >21µm		ASTM D7647	>80		<u></u> 108	▲ 306
Particles >38µm		ASTM D7647	>20		4	4
Particles >71µm		ASTM D7647	>4		2	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15		<u>△</u> 23/22/16	<u>△</u> 25/24/19
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.013	0.015	0.013




## **OIL ANALYSIS REPORT**

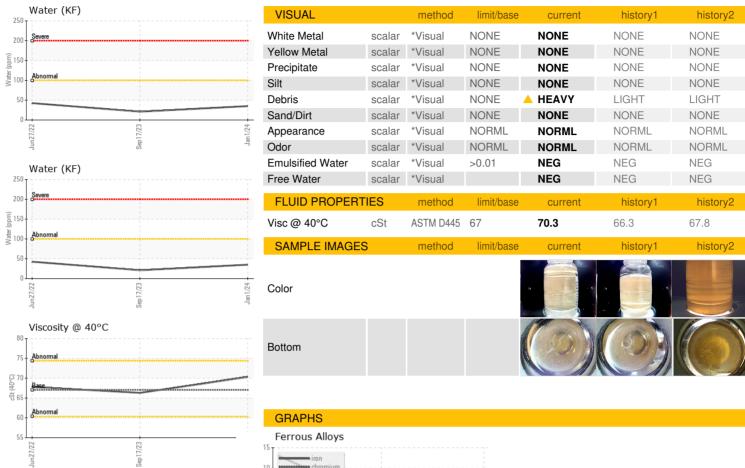



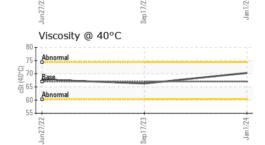







Certificate L2367

Report Id: PLAAMA\_USP [WUSCAR] 06056761 (Generated: 01/11/2024 13:05:52) Rev: 1

Laboratory Sample No. Test Package

Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 06056761 : 10822710 : IND 2

: USP0005295

: 10 Jan 2024 Recieved Diagnosed : 11 Jan 2024 Diagnostician : Doug Bogart **PLAINS DAIRY AMARAILLO** 300 N TAYLOR AMARILLO, TX

US 79105 Contact: ROBERT BURT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: