

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**1GR-Y303A**  
 Component  
**Gearbox**  
 Fluid  
**CASTROL 1100/220 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION** method limit/base current history1 history2

|               |                 |                    |     |     |
|---------------|-----------------|--------------------|-----|-----|
| Sample Number | Client Info     | <b>TO60000904</b>  | --- | --- |
| Sample Date   | Client Info     | <b>09 Jan 2024</b> | --- | --- |
| Machine Age   | hrs Client Info | <b>0</b>           | --- | --- |
| Oil Age       | hrs Client Info | <b>0</b>           | --- | --- |
| Oil Changed   | Client Info     | <b>N/A</b>         | --- | --- |
| Sample Status |                 | <b>NORMAL</b>      | --- | --- |

**CONTAMINATION** method limit/base current history1 history2

|       |           |      |            |     |     |
|-------|-----------|------|------------|-----|-----|
| Water | WC Method | >0.2 | <b>NEG</b> | --- | --- |
|-------|-----------|------|------------|-----|-----|

**WEAR METALS** method limit/base current history1 history2

|          |     |             |      |              |     |     |
|----------|-----|-------------|------|--------------|-----|-----|
| PQ       |     | ASTM D8184  |      | <b>14</b>    | --- | --- |
| Iron     | ppm | ASTM D5185m | >200 | <b>0</b>     | --- | --- |
| Chromium | ppm | ASTM D5185m | >15  | <b>0</b>     | --- | --- |
| Nickel   | ppm | ASTM D5185m | >15  | <b>0</b>     | --- | --- |
| Titanium | ppm | ASTM D5185m |      | <b>0</b>     | --- | --- |
| Silver   | ppm | ASTM D5185m |      | <b>0</b>     | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25  | <b>6</b>     | --- | --- |
| Lead     | ppm | ASTM D5185m | >100 | <b>0</b>     | --- | --- |
| Copper   | ppm | ASTM D5185m | >200 | <b>&lt;1</b> | --- | --- |
| Tin      | ppm | ASTM D5185m | >25  | <b>0</b>     | --- | --- |
| Vanadium | ppm | ASTM D5185m |      | <b>0</b>     | --- | --- |
| Cadmium  | ppm | ASTM D5185m |      | <b>0</b>     | --- | --- |

**ADDITIVES** method limit/base current history1 history2

|            |     |             |  |             |     |     |
|------------|-----|-------------|--|-------------|-----|-----|
| Boron      | ppm | ASTM D5185m |  | <b>0</b>    | --- | --- |
| Barium     | ppm | ASTM D5185m |  | <b>4</b>    | --- | --- |
| Molybdenum | ppm | ASTM D5185m |  | <b>1813</b> | --- | --- |
| Manganese  | ppm | ASTM D5185m |  | <b>0</b>    | --- | --- |
| Magnesium  | ppm | ASTM D5185m |  | <b>0</b>    | --- | --- |
| Calcium    | ppm | ASTM D5185m |  | <b>55</b>   | --- | --- |
| Phosphorus | ppm | ASTM D5185m |  | <b>2968</b> | --- | --- |
| Zinc       | ppm | ASTM D5185m |  | <b>1170</b> | --- | --- |
| Sulfur     | ppm | ASTM D5185m |  | <b>4960</b> | --- | --- |




**CONTAMINANTS** method limit/base current history1 history2

|           |     |             |     |           |     |     |
|-----------|-----|-------------|-----|-----------|-----|-----|
| Silicon   | ppm | ASTM D5185m | >50 | <b>18</b> | --- | --- |
| Sodium    | ppm | ASTM D5185m |     | <b>0</b>  | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <b>0</b>  | --- | --- |

**VISUAL** method limit/base current history1 history2

|                  |        |         |       |              |                             |     |
|------------------|--------|---------|-------|--------------|-----------------------------|-----|
| White Metal      | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Yellow Metal     | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Precipitate      | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Silt             | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Debris           | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Sand/Dirt        | scalar | *Visual | NONE  | <b>NONE</b>  | ---                         | --- |
| Appearance       | scalar | *Visual | NORML | <b>NORML</b> | ---                         | --- |
| Odor             | scalar | *Visual | NORML | <b>NORML</b> | ---                         | --- |
| Emulsified Water | scalar | *Visual | >0.2  | <b>NEG</b>   | ---                         | --- |
| Free Water       | scalar | *Visual |       | <b>NEG</b>   | location: K RAND - YUPCHEVA | --- |

# OIL ANALYSIS REPORT



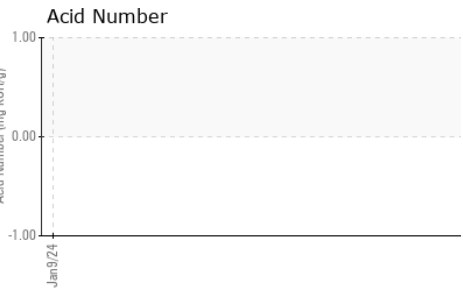
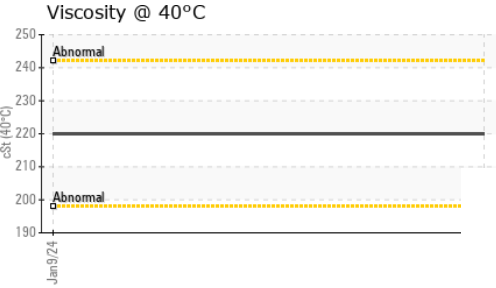
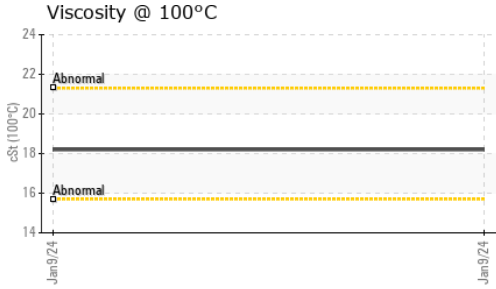


| FLUID PROPERTIES     | method | limit/base | current     | history1 | history2 |
|----------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt    | ASTM D445  | <b>220</b>  | ---      | ---      |
| Visc @ 100°C         | cSt    | ASTM D445  | <b>18.2</b> | ---      | ---      |
| Viscosity Index (VI) | Scale  | ASTM D2270 | <b>90</b>   | ---      | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |          |          |  |  |
|--------|--|----------|----------|--|--|
| Color  |  | no image | no image |  |  |
| Bottom |  | no image | no image |  |  |

## GRAPHS

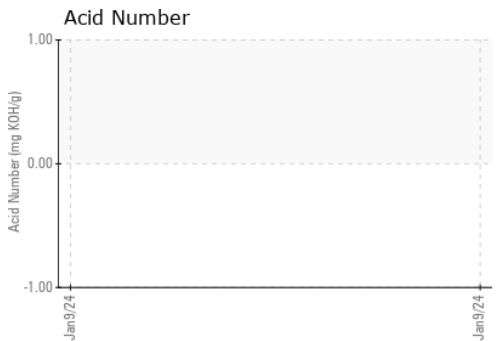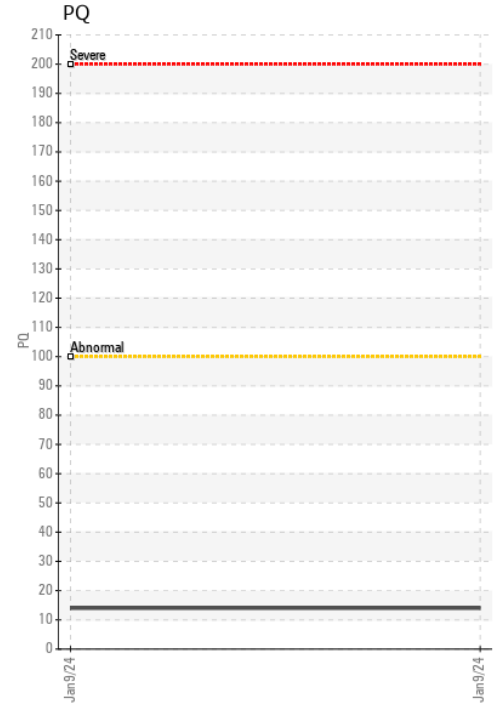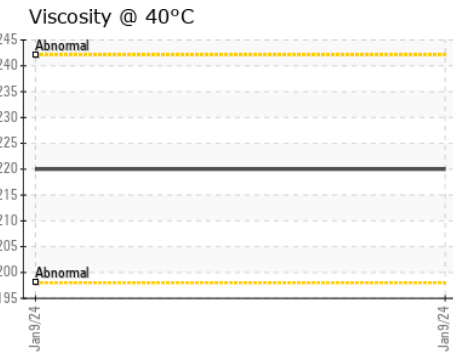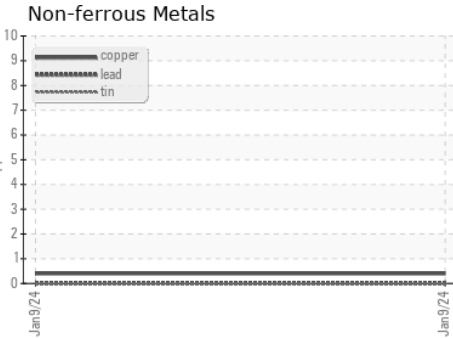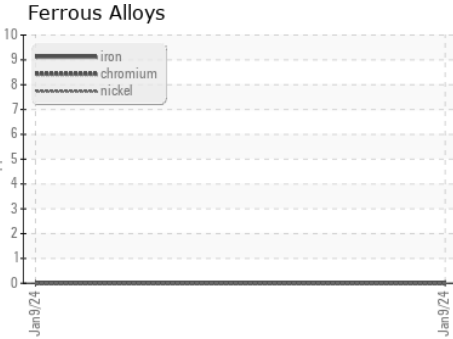

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO60000904 **Recieved** : 10 Jan 2024  
**Lab Number** : 06056961 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822910 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**YUPO**  
 800 YUPO CT  
 CHESAPEAKE, VA  
 US 23320  
 Contact: K RAND  
 KRAND@YUPO.COM

T:  
F: