




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

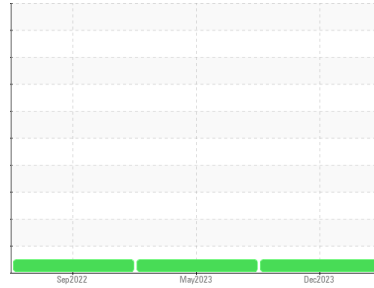

Machine Id

144

Component

Diesel Engine

Fluid

PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0878883	WC0792750	WC0727419
Sample Date	Client Info		21 Dec 2023	24 May 2023	14 Sep 2022
Machine Age	mls	Client Info	100089	5000	0
Oil Age	mls	Client Info	5000	5000	5000
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	24	23	19
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	5	3	7
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	<1	1	2
Tin	ppm	ASTM D5185m >15	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	7	0
Barium	ppm	ASTM D5185m	0	2	<1
Molybdenum	ppm	ASTM D5185m	72	62	63
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	1090	829	861
Calcium	ppm	ASTM D5185m	1224	1087	1077
Phosphorus	ppm	ASTM D5185m	1116	969	971
Zinc	ppm	ASTM D5185m	1393	1166	1218
Sulfur	ppm	ASTM D5185m	3648	3012	2951

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	7	4
Sodium	ppm	ASTM D5185m	2	0	0
Potassium	ppm	ASTM D5185m >20	6	6	13

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	1	0.9
Nitration	Abs/cm	*ASTM D7624 >20	8.4	9.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.7	20.5	20.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.9	17.1	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.1	8.1	10.0











OIL ANALYSIS REPORT

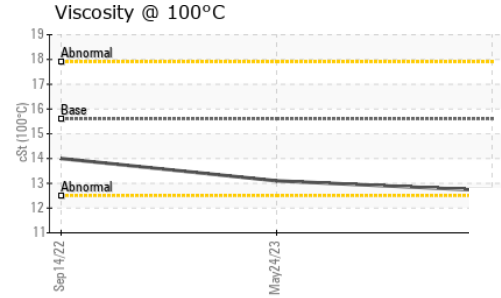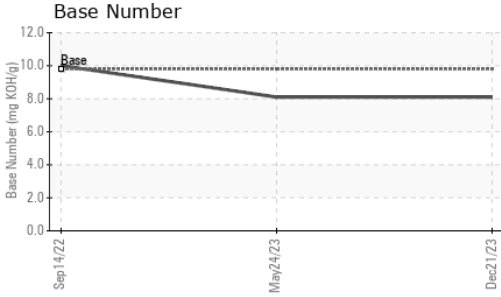

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	12.7	13.1

GRAPHS

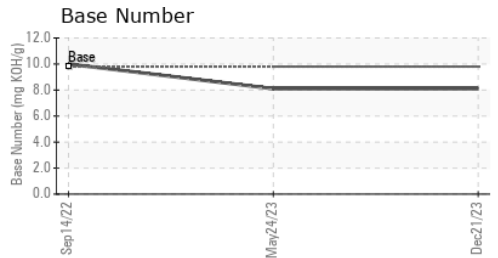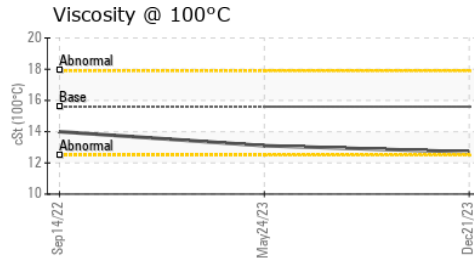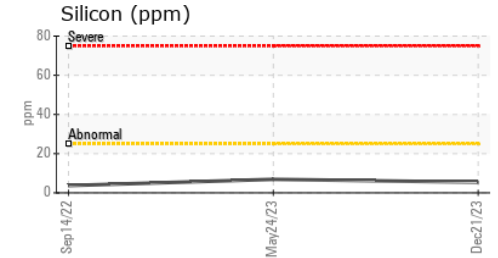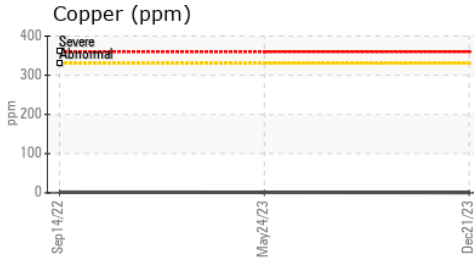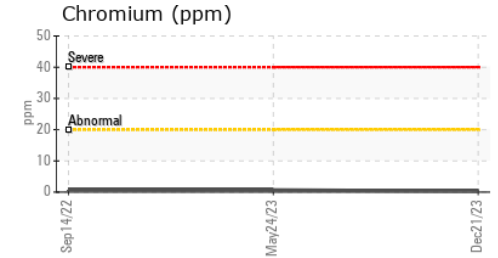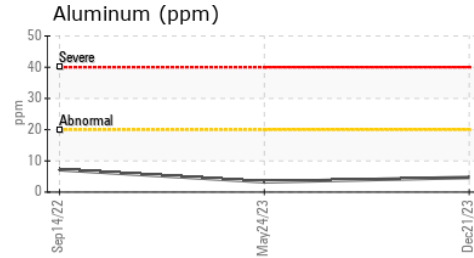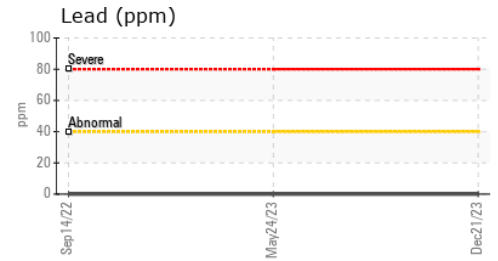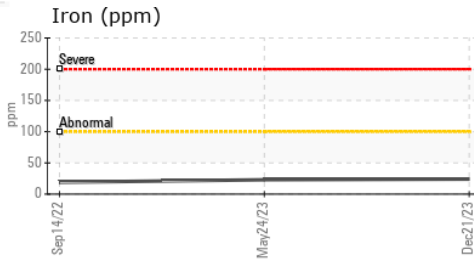

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0878883 **Received** : 10 Jan 2024
Lab Number : 06057237 **Diagnosed** : 11 Jan 2024
Unique Number : 10823186 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAYNE CO SCHOOL BUS GARAGE
 1603 SALEM CHURCH RD
 GOLDSBORO, NC
 US 27530
 Contact: BRANDON BRIGGS
 brandonbriggs@wcps.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: