




OIL ANALYSIS REPORT

Sample Rating Trend

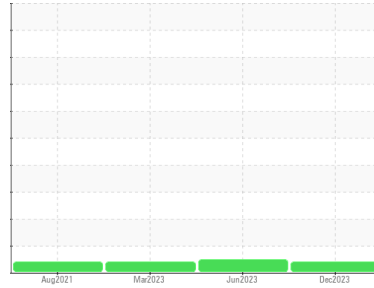

VISCOSITY



Machine Id
CR1220

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 5W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0867359	WC0784899	WC0785133
Sample Date	Client Info			21 Dec 2023	27 Jun 2023	17 Mar 2023
Machine Age	hrs	Client Info		2230	1702	1302
Oil Age	hrs	Client Info		0	400	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				ATTENTION	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7	5	9
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	<1	1
Lead	ppm	ASTM D5185m	>40	0	3	2
Copper	ppm	ASTM D5185m	>330	13	26	21
Tin	ppm	ASTM D5185m	>15	<1	3	2
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	8	30	125
Barium	ppm	ASTM D5185m	10	0	0	<1
Molybdenum	ppm	ASTM D5185m	100	57	53	8
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	450	883	804	163
Calcium	ppm	ASTM D5185m	3000	1154	1398	2231
Phosphorus	ppm	ASTM D5185m	1150	1025	1054	987
Zinc	ppm	ASTM D5185m	1350	1220	1240	1168
Sulfur	ppm	ASTM D5185m	4250	3546	3890	3514




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	3	6
Sodium	ppm	ASTM D5185m	>44	<1	2	3
Potassium	ppm	ASTM D5185m	>20	1	0	2
Fuel	%	ASTM D3524	>5	1.0	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.0	5.7	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	16.9	17.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.9	12.4	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	9.2	8.7







OIL ANALYSIS REPORT

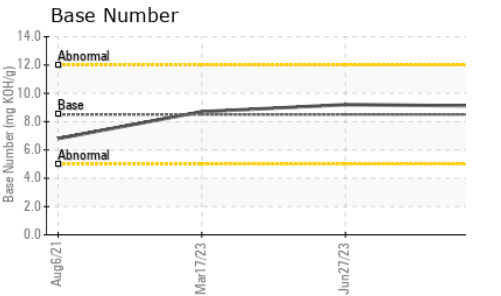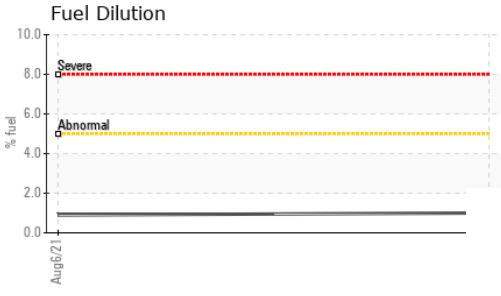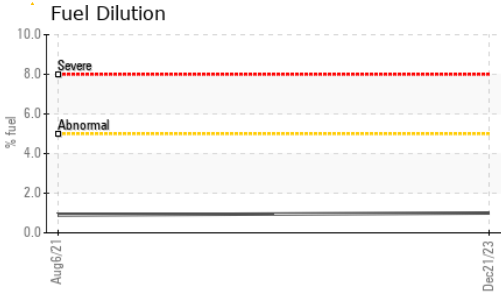

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.9	11.3	▲ 12.1

GRAPHS

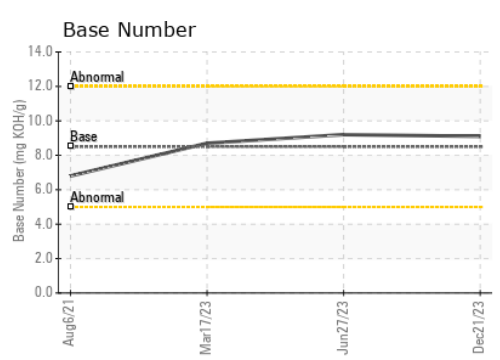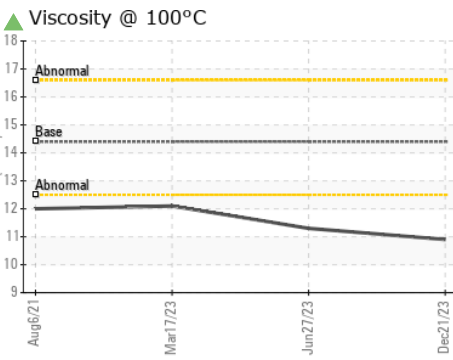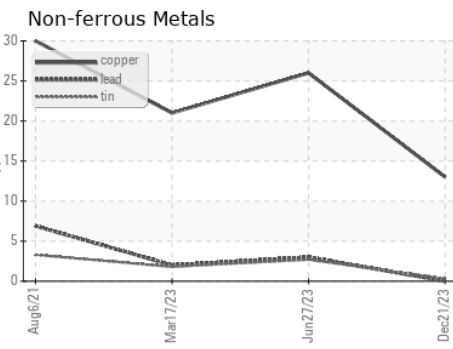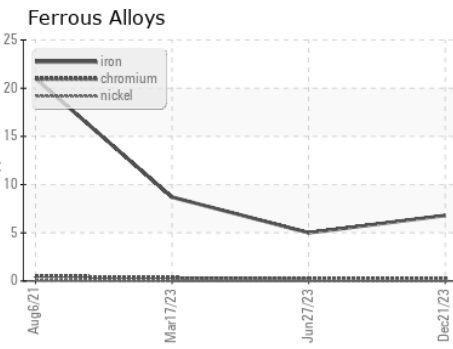

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0867359 **Recieved** : 10 Jan 2024
Lab Number : **06057285** **Diagnosed** : 14 Jan 2024
Unique Number : 10823234 **Diagnostician** : Don Baldridge
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

BUCKNER - WILLIS
 18123 HWY 75 NORTH
 WILLIS, TX
 US 77378
 Contact: JOHN HAWKINS
 johnh@bucknercompanies.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)