

## **OIL ANALYSIS REPORT**

# Sample Rating Trend



NORMAL

LIEBHERR LR 1600/2 CR6604 (S/N 074564)

Diesel Engine Fluid DIESEL ENGINE OIL SAE 5W40 (--- GAL)

### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

		1002010	1002013 0812020	Mazozo Mazozz Sunzozz	Dec2023			
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0877495	WC0704335	WC0671515		
Sample Date		Client Info		21 Dec 2023	06 Jun 2022	04 Mar 2022		
Machine Age	hrs	Client Info		14914	12791	12772		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		Changed	Changed	Changed		
Sample Status				NORMAL	NORMAL	NORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2		
Fuel		WC Method	>5	<1.0	<1.0	<1.0		
Water		WC Method		NEG	NEG	NEG		
Glycol		WC Method	20.L	NEG	NEG	NEG		
WEAR METALS		method	limit/base		history1	history2		
Iron	ppm	ASTM D5185m	>100	2	3	2		
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1		
Nickel	ppm	ASTM D5185m	>5	0	<1	0		
Titanium	ppm	ASTM D5185m		<1	0	0		
Silver	ppm	ASTM D5185m	>3	0	1	<1		
Aluminum	ppm	ASTM D5185m	>15	2	2	2		
Lead	ppm		>30	0	1	0		
Copper	ppm	ASTM D5185m	>125	0	<1	<1		
Tin	ppm	ASTM D5185m	>5	0	<1	0		
Antimony	ppm	ASTM D5185m						
Vanadium	ppm	ASTM D5185m		0	0	<1		
Cadmium	ppm	ASTM D5185m		0	<1	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	250	257	103	157		
Barium	ppm	ASTM D5185m	10	0	0	0		
Molybdenum	ppm	ASTM D5185m	100	0	52	15		
Manganese	ppm	ASTM D5185m		0	<1	<1		
Magnesium	ppm	ASTM D5185m	450	85	908	16		
Calcium	ppm	ASTM D5185m	3000	2072	1096	2145		
Phosphorus	ppm	ASTM D5185m	1150	1005	1034	1015		
Zinc	ppm	ASTM D5185m	1350	1145	1226	1237		
Sulfur	ppm	ASTM D5185m	4250	3803	3646	3068		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>60	3	5	5		
Sodium	ppm	ASTM D5185m	>44	1	3	2		
Potassium	ppm	ASTM D5185m	>20	3	1	6		
INFRA-RED		method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1		
Nitration	Abs/cm	*ASTM D7624	>20	5.5	6.4	5.9		
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	19.7	21.0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	17.0	16.1		
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.8	10.0	9.1		
				Contact/Location: JOHN HAWKINS - BUCWILTX				

Contact/Location: JOHN HAWKINS - BUCWILTX




13 Ab

12


Feb18/13

lov/26/19

# **OIL ANALYSIS REPORT**



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.9	13.7	14.5
GRAPHS						

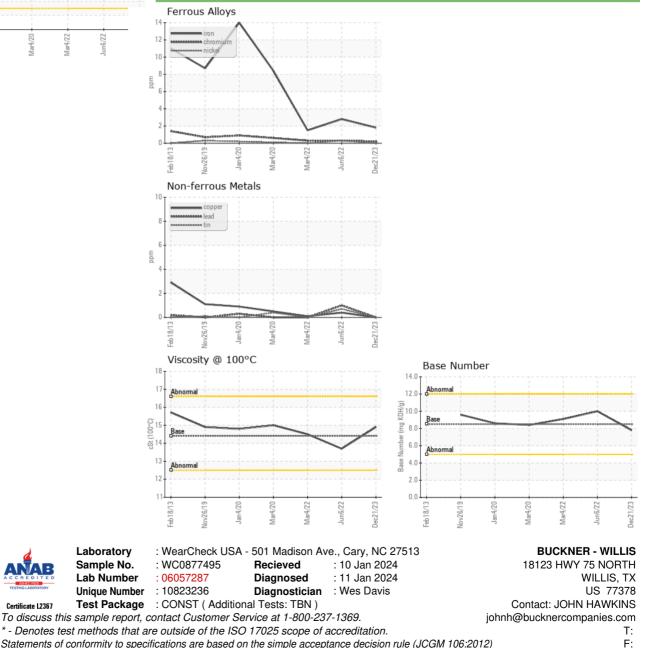

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)