




# OIL ANALYSIS REPORT

Sample Rating Trend

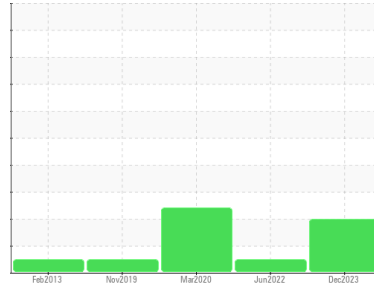

ISO



Machine Id  
**LIEBHERR LR 1600/2 CR6604 (S/N 074564)**

Component  
**Hydraulic System**  
Fluid  
**ATF (149 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0877496</b>   | WC0704341   | WC0423127   |
| Sample Date   | Client Info |             | <b>22 Dec 2023</b> | 06 Jun 2022 | 04 Mar 2020 |
| Machine Age   | hrs         | Client Info | <b>14914</b>       | 12791       | 11985       |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Changed     | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | ABNORMAL    |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >20 | <b>8</b>     | 2        | 2        |
| Chromium | ppm    | ASTM D5185m >10 | <b>0</b>     | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m >10 | <b>&lt;1</b> | 0        | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m     | <b>0</b>     | <1       | 0        |
| Aluminum | ppm    | ASTM D5185m >10 | <b>2</b>     | 1        | <1       |
| Lead     | ppm    | ASTM D5185m >10 | <b>1</b>     | 1        | <1       |
| Copper   | ppm    | ASTM D5185m >75 | <b>18</b>    | 5        | 10       |
| Tin      | ppm    | ASTM D5185m >10 | <b>&lt;1</b> | 0        | 0        |
| Antimony | ppm    | ASTM D5185m     | <b>---</b>   | ---      | 0        |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>88</b>    | 67       | 99       |
| Barium     | ppm    | ASTM D5185m | <b>0</b>     | 0        | <1       |
| Molybdenum | ppm    | ASTM D5185m | <b>&lt;1</b> | <1       | <1       |
| Manganese  | ppm    | ASTM D5185m | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m | <b>5</b>     | 5        | 8        |
| Calcium    | ppm    | ASTM D5185m | <b>118</b>   | 159      | 143      |
| Phosphorus | ppm    | ASTM D5185m | <b>269</b>   | 236      | 251      |
| Zinc       | ppm    | ASTM D5185m | <b>109</b>   | 146      | 78       |
| Sulfur     | ppm    | ASTM D5185m | <b>1317</b>  | 1291     | 909      |

## CONTAMINANTS





|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>8</b> | 4        | 4        |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b> | 0        | 2        |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b> | 2        | 0        |

## FLUID CLEANLINESS

|                 | method       | limit/base | current           | history1 | history2   |
|-----------------|--------------|------------|-------------------|----------|------------|
| Particles >4µm  | ASTM D7647   | >20000     | <b>▲ 202632</b>   | 18301    | ▲ 22343    |
| Particles >6µm  | ASTM D7647   | >5000      | <b>▲ 109455</b>   | 798      | ▲ 3550     |
| Particles >14µm | ASTM D7647   | >640       | <b>▲ 1759</b>     | 26       | ▲ 446      |
| Particles >21µm | ASTM D7647   | >160       | <b>▲ 202</b>      | 6        | ▲ 134      |
| Particles >38µm | ASTM D7647   | >40        | <b>1</b>          | 0        | ▲ 13       |
| Particles >71µm | ASTM D7647   | >10        | <b>0</b>          | 0        | ▲ 4        |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16  | <b>▲ 25/24/18</b> | 21/17/12 | ▲ 22/19/16 |



# OIL ANALYSIS REPORT

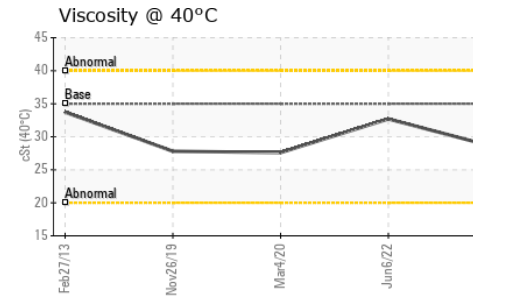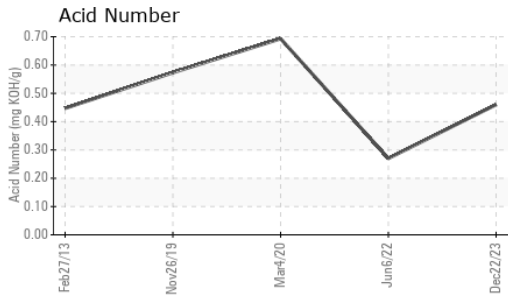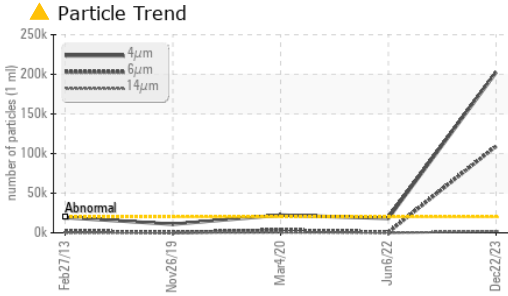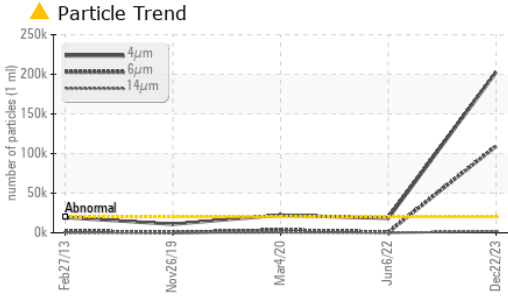


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.46</b> | 0.27     | 0.693    |





| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual | NONE       | <b>LIGHT</b> | NONE     | NONE     |
| Debris           | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual | >0.1       | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method    | limit/base | current     | history1 | history2 |
|------------------|-----|-----------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt | ASTM D445 | 35.0       | <b>28.4</b> | 32.7     | 27.6     |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

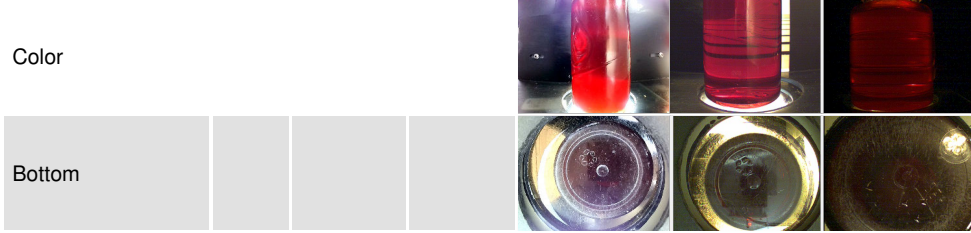

## GRAPHS

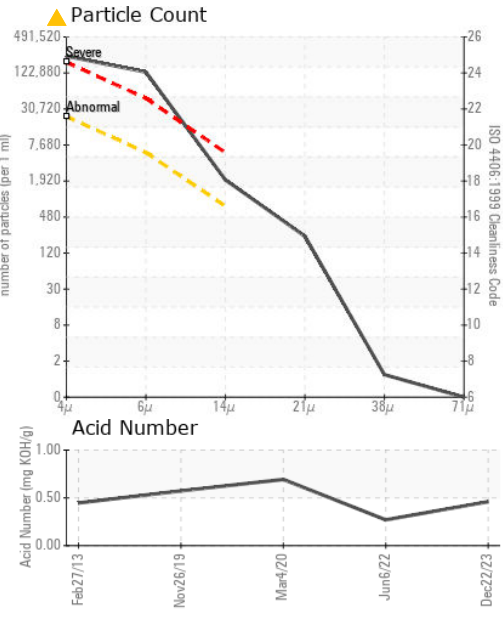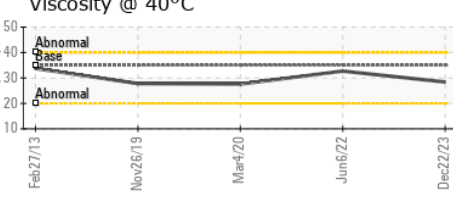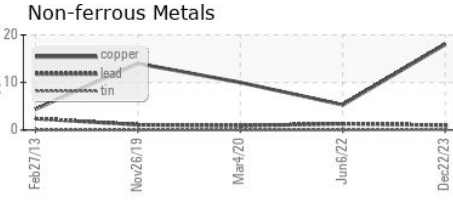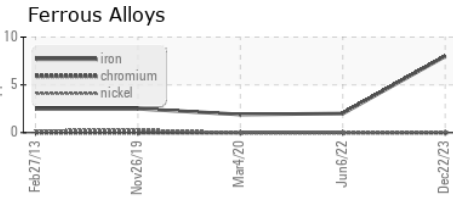

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0877496 **Received** : 10 Jan 2024  
**Lab Number** : 06057330 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10823279 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**BUCKNER - WILLIS**  
 18123 HWY 75 NORTH  
 WILLIS, TX  
 US 77378  
 Contact: JOHN HAWKINS  
 johnh@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)