

OIL ANALYSIS REPORT

Machine Id KAESER SFC 132 4759882 (S/N 1450) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011507	KCPA002215	KCP48488
Sample Date		Client Info		04 Jan 2024	11 Jul 2023	02 Aug 2022
Machine Age	hrs	Client Info		49095	45976	41707
Oil Age	hrs	Client Info		0	0	6720
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m		2	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		11	20	2
Tin	ppm	ASTM D5185m		0	0	0
Antimony	ppm	ASTM D5185m	210			
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium		ASTM D5185m		0	0	0
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	18	3	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		31	21	417
Zinc	ppm	ASTM D5185m		0	0	11
Sulfur	ppm	ASTM D5185m		19872	19366	96
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		7	2	1
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	0.011	0.008	0.005
ppm Water	ppm	ASTM D6304	>500	113	85.7	54.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1821	17479	96980
Particles >6µm		ASTM D7647	>1300	408	4 350	A 31124
Particles >14µm		ASTM D7647	>80	21	1 15	2 530
Particles >21µm		ASTM D7647	>20	5	<u> </u>	4 25
Particles >38µm		ASTM D7647	>4	0	1	9
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	1 21/19/14	4 /22/19
FLUID DEGRADATION method limit/base current history1 histo						
				0.00	0.00	

Acid Number (AN) mg KOH/g AST

mg KOH/g ASTM D8045 0.4

3:03:47) Rev: 1 Co


0.38 0.36 0.26


Report Id: HUFGRE [WUSCAR] 06057355 (Generated: 01/12/2024 13:03:47) Rev: 1


Contact/Location: TIM DEARSTONE - HUFGRE



OIL ANALYSIS REPORT






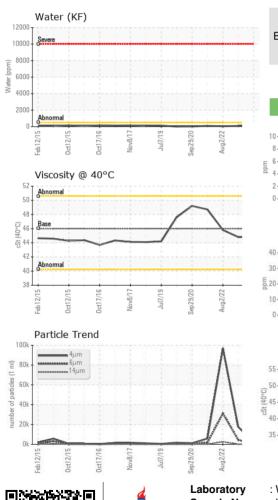

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.8	44.8	45.8
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				• •	J	
					1	(and)

Bottom

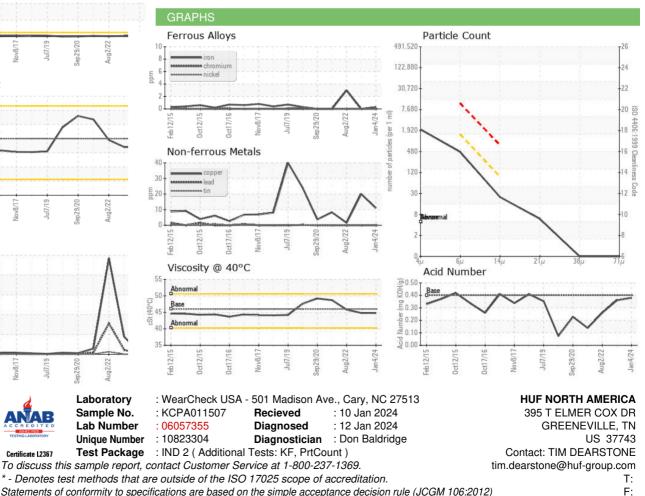

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)