OIL ANALYSIS REPORT

Sample Rating Trend

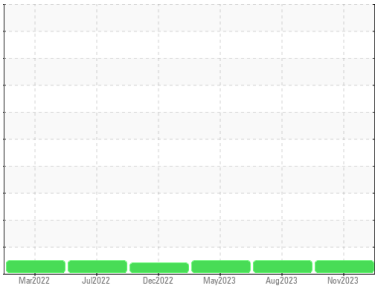

NORMAL

Machine Id
550 VT
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 46 (150 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0851930**	WC0773915	WC0685148
Sample Date		Client Info		**28 Nov 2023**	05 Aug 2023	07 May 2023
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	---	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**2**	4	4
Chromium	ppm	ASTM D5185m	>20	**0**	0	0
Nickel	ppm	ASTM D5185m	>20	**0**	0	0
Titanium	ppm	ASTM D5185m		**<1**	<1	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**2**	2	0
Lead	ppm	ASTM D5185m	>20	**0**	0	0
Copper	ppm	ASTM D5185m	>20	**7**	2	1
Tin	ppm	ASTM D5185m	>20	**<1**	<1	<1
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	**0**	0	0
Barium	ppm	ASTM D5185m	0	**0**	0	0
Molybdenum	ppm	ASTM D5185m	0	**<1**	<1	0
Manganese	ppm	ASTM D5185m	0	**0**	0	0
Magnesium	ppm	ASTM D5185m	0	**0**	0	<1
Calcium	ppm	ASTM D5185m	50	**6**	▲ 0	<1
Phosphorus	ppm	ASTM D5185m	330	**299**	275	252
Zinc	ppm	ASTM D5185m	430	**202**	▲ 134	128
Sulfur	ppm	ASTM D5185m	760	**551**	▲ 475	524

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**3**	4	7
Sodium	ppm	ASTM D5185m		**0**	0	0
Potassium	ppm	ASTM D5185m	>20	**1**	1	1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	**972**	---	114
Particles >6µm		ASTM D7647	>640	**176**	---	33
Particles >14µm		ASTM D7647	>160	**10**	---	4
Particles >21µm		ASTM D7647	>40	**2**	---	1
Particles >38µm		ASTM D7647	>10	**0**	---	0
Particles >71µm		ASTM D7647	>3	**0**	---	0
Oil Cleanliness		ISO 4406 (c)	>18/16/14	**17/15/10**	---	14/12/9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	**0.34**	0.35	0.38

OIL ANALYSIS REPORT

Particle Trend

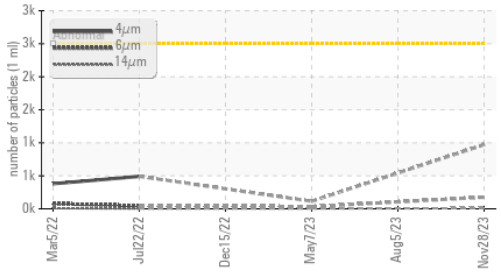

Acid Number

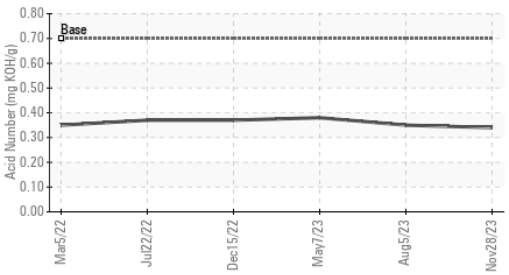

Viscosity @ 40°C

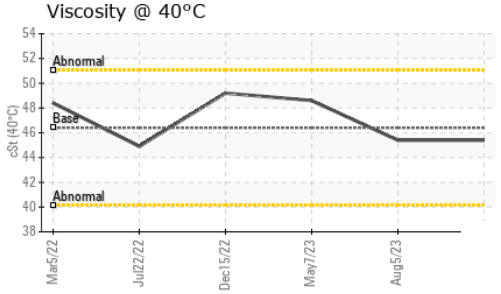

Particle Trend

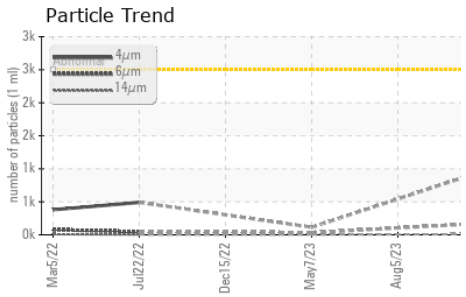

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.4	**45.4**	45.4	48.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

Ferrous Alloys

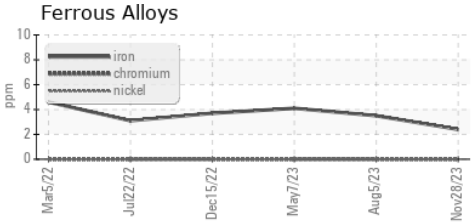

Non-ferrous Metals

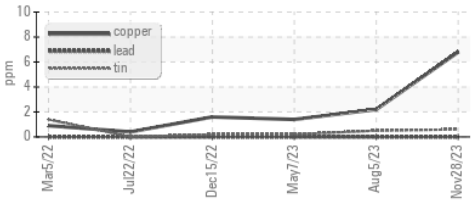

Viscosity @ 40°C

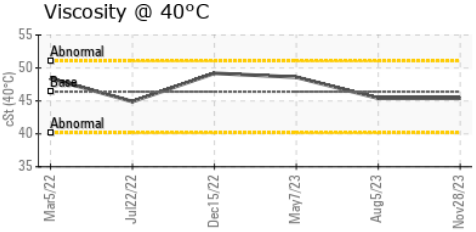

Particle Count

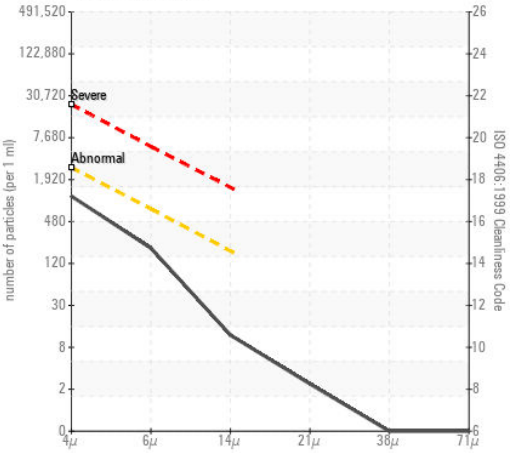

Acid Number

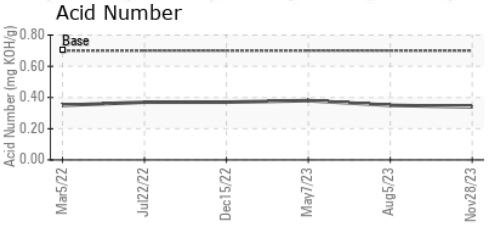

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0851930
Lab Number : 06058068
Unique Number : 10829450
Test Package : IND 2

Recieved : 11 Jan 2024
Diagnosed : 12 Jan 2024
Diagnostician : Doug Bogart

LEXALITE AN ALP LTG BRAND
ONE GUM BRANCH RD
DICKSON, TN
US 37055-2765
Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: