


OIL ANALYSIS REPORT

Sample Rating Trend







TURBINE-2

Component

Turbine

MOBIL SHC 824 (275 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		g2014 Sep20	17 Jul2018 May2019	Mar2020 Jan2021 Nov2021	Sep2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0745744	WC0745738	WC0745732
Sample Date		Client Info		18 May 2023	02 Mar 2023	05 Jan 2023
Machine Age	hrs	Client Info		43949	42118	174111
Oil Age	hrs	Client Info		43949	42118	40774
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.03	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>15	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>5	<1	<1	0
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	4	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	6	0
Phosphorus	ppm	ASTM D5185m		811	823	750
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	70	80
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	3	0	1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	280	86	235
Particles >6µm		ASTM D7647	>1300	105	27	85
Particles >14μm		ASTM D7647	>160	17	3	14
Particles >21µm		ASTM D7647	>40	5	1	4
Particles >38μm		ASTM D7647	>10	0	0	0
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	15/14/11	14/12/9	15/14/11
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Asid Number (ANI)		ACTM DODAE	0.5	0.00	0.00	0.40


Acid Number (AN)

mg KOH/g ASTM D8045 0.5

0.22



OIL ANALYSIS REPORT

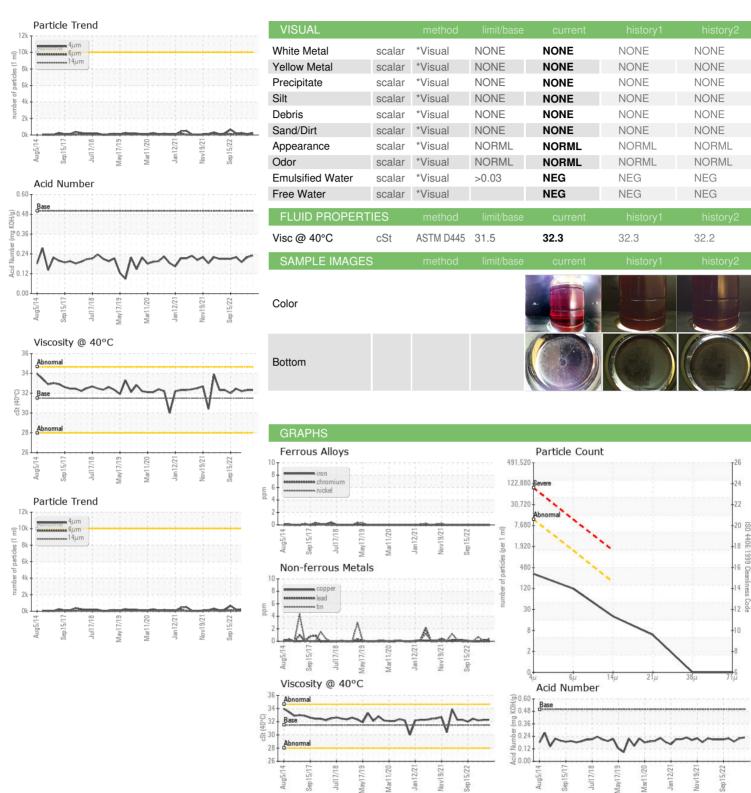





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number : 10829456 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0745744 Recieved : 11 Jan 2024 : 06058074 Diagnosed : 12 Jan 2024

Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

GREENE VALLEY LANDFILL

9 SOUTH 610 GREENE ROAD NAPERVILLE, IL

US 60565 Contact: CHRIS ADEN

caden@wm.com T: (630)743-4479 F: (630)983-1535

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)