




# FUEL REPORT

Sample Rating Trend

**WATER**



Area  
**[R23531]**  
 Machine Id  
**C006169**  
 Component  
**Diesel Fuel**  
 Fluid  
**{not provided} (--- GAL)**

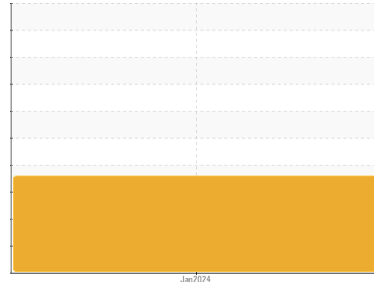

## DIAGNOSIS

### Recommendation

We advise that you filter this fluid before use. We advise that you follow the water drain-off procedure for this component.

### Corrosion

All metal levels are normal indicating no corrosion in the system.

### Contaminants

There is a high amount of particulates present in the fuel. Free water present. There is no bacteria or fungus (yeast and/or mold) present in the sample.

### Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0897005</b>	---	---
Sample Date	Client Info	<b>08 Jan 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## PHYSICAL PROPERTIES

method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298	<b>0.840</b>	---	---
Fuel Color	text *Visual Screen	<b>Red</b>	---	---
ASTM Color	scalar *ASTM D1500	<b>L4.5</b>	---	---
Visc @ 40°C	cSt ASTM D445	<b>2.44</b>	---	---
Pensky-Martens Flash Point	°C *PMCC Calculated	<b>58</b>	---	---
Cloud Point	°C ASTM D5771	<b>-11</b>	---	---
Pour Point	°C ASTM D5950	<b>-36</b>	---	---

## SULFUR CONTENT

method	limit/base	current	history1	history2
Sulfur	ppm ASTM D5185m	<b>0</b>	---	---
Sulfur (UVF)	ppm ASTM D5453	<b>9</b>	---	---

## DISTILLATION

method	limit/base	current	history1	history2
Initial Boiling Point	°C ASTM D86	<b>162</b>	---	---
5% Distillation Point	°C ASTM D86	<b>189</b>	---	---
10% Distill Point	°C ASTM D86	<b>200</b>	---	---
15% Distillation Point	°C ASTM D86	<b>209</b>	---	---
20% Distill Point	°C ASTM D86	<b>218</b>	---	---
30% Distill Point	°C ASTM D86	<b>231</b>	---	---
40% Distill Point	°C ASTM D86	<b>245</b>	---	---
50% Distill Point	°C ASTM D86	<b>259</b>	---	---
60% Distill Point	°C ASTM D86	<b>273</b>	---	---
70% Distill Point	°C ASTM D86	<b>287</b>	---	---
80% Distill Point	°C ASTM D86	<b>304</b>	---	---
85% Distillation Point	°C ASTM D86	<b>313</b>	---	---
90% Distill Point	°C ASTM D86	<b>325</b>	---	---
95% Distillation Point	°C ASTM D86	<b>342</b>	---	---
Final Boiling Point	°C ASTM D86	<b>351</b>	---	---
Distillation Residue	% ASTM D86	<b>1.4</b>	---	---
Distillation Loss	% ASTM D86	<b>0.7</b>	---	---

## IGNITION QUALITY






method	limit/base	current	history1	history2
API Gravity	ASTM D7777	<b>37.0</b>	---	---
Cetane Index	ASTM D4737 <40.0	<b>48.2</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m <1.0	<b>0</b>	---	---
Sodium	ppm ASTM D5185m <0.1	<b>0</b>	---	---
Potassium	ppm ASTM D5185m <0.1	<b>0</b>	---	---
Water	% ASTM D6304 <0.05	<b>0.007</b>	---	---
ppm Water	ppm ASTM D6304 <500	<b>79</b>	---	---
% Gasoline	% *In-House <0.50	<b>0.0</b>	---	---
% Biodiesel	% *In-House <20.0	<b>0.0</b>	---	---



# FUEL REPORT

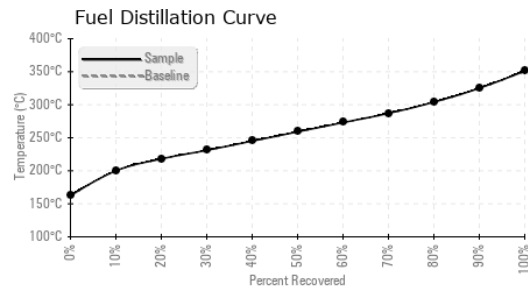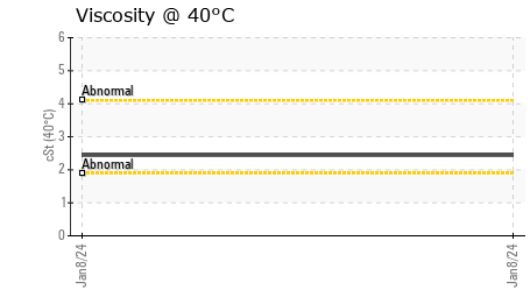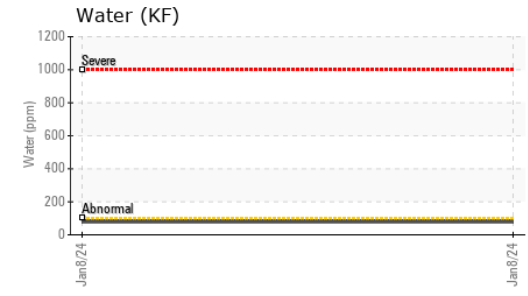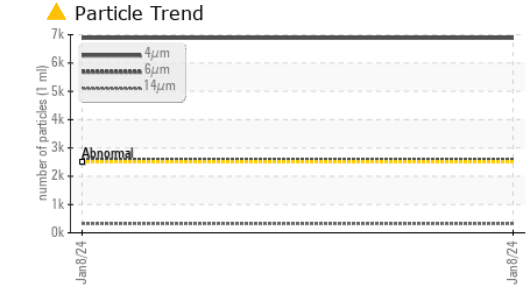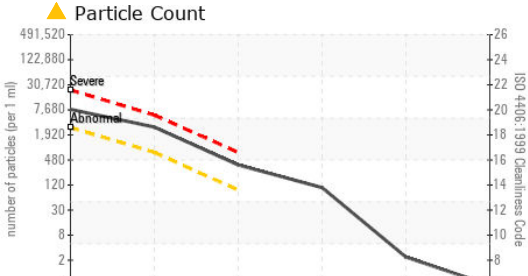

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897005 **Received** : 11 Jan 2024  
**Lab Number** : 06058567 **Diagnosed** : 29 Jan 2024  
**Unique Number** : 10829949 **Diagnostician** : Doug Bogart  
**Test Package** : DF-3 ( Additional Tests: Bacteria, Screen )



**HOFFMAN EQUIPMENT INC**  
 300 S RANDOLPHVILLE RD  
 PISCATAWAY, NJ  
 US 08854  
 Contact: ANTHONY NALEWAJKO  
 anthony.nalewajko@hoffmanequip.com  
 T: (732)752-3600  
 F: (732)968-8371

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 6882	---	---
Particles >6µm	ASTM D7647	>640	▲ 2588	---	---
Particles >14µm	ASTM D7647	>80	▲ 321	---	---
Particles >21µm	ASTM D7647	>20	▲ 92	---	---
Particles >38µm	ASTM D7647	>4	2	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	▲ 20/19/16	---	---

MICROBIAL	method	limit/base	current	history1	history2
Bacteria	CFU/ml WC-Method	>=100000	0	---	---
Yeast	CFU/ml WC-Method	>=100000	0	---	---
Mold	Colonies WC-Method	MODER	---	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm ASTM D5185m	<0.1	0	---	---
Nickel	ppm ASTM D5185m	<0.1	0	---	---
Lead	ppm ASTM D5185m	<0.1	0	---	---
Vanadium	ppm ASTM D5185m	<0.1	0	---	---
Iron	ppm ASTM D5185m	<0.1	0	---	---
Calcium	ppm ASTM D5185m	<0.1	0	---	---
Magnesium	ppm ASTM D5185m	<0.1	0	---	---
Phosphorus	ppm ASTM D5185m	<0.1	0	---	---
Zinc	ppm ASTM D5185m	<0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image