

GREASE ANALYSIS

Sample Rating Trend

VISUAL METAL

Machine Id MAYSVILLE HOIST Component

Grease Fluid MOBIL Mobilux EP 0 (--- GAL)

DIAGNOSIS


Recommendation

There is some discrepancy possible with this sample regarding if it is a baseline reference or if there is a high speed and low speed coupling sample submitted. If this is a baseline sample, no other work needs to be done. If this is an active sample, some of the results for this and the subsequent grease sample are incorrect as they rely on a baseline reference sample submission from the customer. Analytical Ferrography: A minimal amount of wear is common in new grease samples, the noted moderate amount of white metal in the visuals review and the wear debris noted in the microscopic analysis are inconsequential to the component and should be considered normal. All other parameters are within specifications.

| | | | | Jan2024 | | |
|------------------|------------|-------------|------------|-------------|----------|----------|
| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0896570 | | |
| Sample Date | | Client Info | | 08 Jan 2024 | | |
| Machine Age | mths | Client Info | | 6 | | |
| Grease Age | mths | Client Info | | 6 | | |
| Grease Serviced | | Client Info | | Changed | | |
| Sample Status | | | | ATTENTION | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | >200 | 14 | | |
| Iron | ppm | ASTM D5185m | >250 | 2 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >5 | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >75 | 3 | | |
| Tin | ppm | ASTM D5185m | >5 | 0 | | |
| Silver | ppm | ASTM D5185m | >5 | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 268 | | |
| Magnesium | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Phosphorus | ppm | ASTM D5185m | | 1053 | | |
| Zinc | ppm | ASTM D5185m | | 1671 | | |
| THICKENER/SOA | ۱P | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | | <1 | | |
| Barium | ppm | ASTM D5185m | | 1 | | |
| Calcium | ppm | ASTM D5185m | | 15 | | |
| Sodium | ppm | ASTM D5185m | | 12 | | |
| Lithium | ppm | ASTM D5185m | | 360 | | |
| Sulfur | ppm | ASTM D5185m | | 8192 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >150 | 4 | | |
| Potassium | ppm | ASTM D5185m | | 4 | | |
| Water | % | ASTM D6304 | >0.1 | 0.028 | | |
| ppm Water | ppm | ASTM D6304 | >1000 | 283 | | |
| GREASE CONDI | ΓΙΟΝ | method | limit/base | current | history1 | history2 |
| Grease Color | | *Visual | | Yellow | | |
| Texture | | *In-house | | Buttery | | |
| NLGI Consistency | NLGI Scale | *SKF Method | | 00-0 | | |



GREASE ANALYSIS

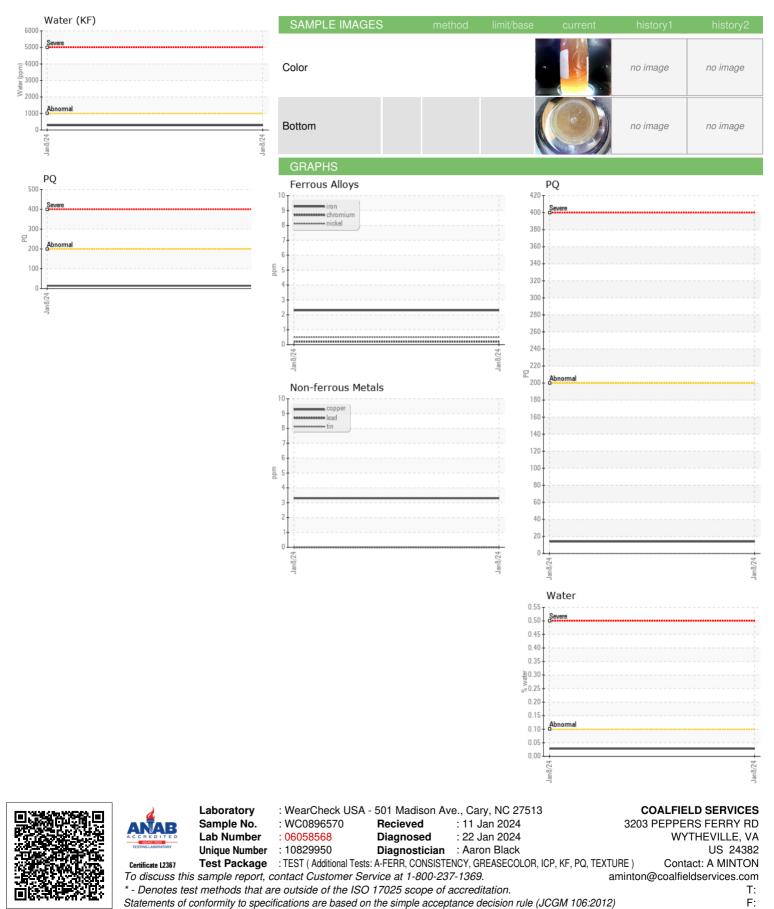

Contact/Location: A MINTON - COAWYT



FERROGRAPHY REPORT

Machine Id MAYSVILLE HOIST Component

Grease Fluid MOBIL Mobilux EP 0 (--- GAL)



Magn: 500x Illum: RW



| FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|---------|----------|----------|
| Ferrous Rubbing | Scale 0-10 | *ASTM D7684 | | 1 | | |
| Ferrous Sliding | Scale 0-10 | *ASTM D7684 | | 1 | | |
| Ferrous Cutting | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Rolling | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Break-in | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Spheres | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Black Oxides | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Red Oxides | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Corrosive | Scale 0-10 | *ASTM D7684 | | | | |
| Ferrous Other | Scale 0-10 | *ASTM D7684 | | | | |
| Nonferrous Rubbing | Scale 0-10 | *ASTM D7684 | | | | |
| Nonferrous Sliding | Scale 0-10 | *ASTM D7684 | | | | |
| Nonferrous Cutting | Scale 0-10 | *ASTM D7684 | | | | |
| Nonferrous Rolling | Scale 0-10 | *ASTM D7684 | | | | |
| Nonferrous Other | Scale 0-10 | *ASTM D7684 | | | | |
| Carbonaceous Material | Scale 0-10 | *ASTM D7684 | | | | |
| Lubricant Degradation | Scale 0-10 | *ASTM D7684 | | | | |
| Sand/Dirt | Scale 0-10 | ASTM D7684 | | | | |
| Fibres | Scale 0-10 | *ASTM D7684 | | | | |
| Spheres | Scale 0-10 | *ASTM D7684 | | | | |
| Other | Scale 0-10 | *ASTM D7684 | | | | |

Magn: 100x Illum: RW



WEAR _____

This page left intentionally blank