


# **OIL ANALYSIS REPORT**

Sample Rating Trend



## **VISCOSITY**



# SUPREME 12TM323008

Component

**Hydrostatic** 

**CHEVRON HYDRAULIC AW ISO 68 (55 GAL** 

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### ▲ Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

L)				Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0669861		
Sample Date		Client Info		25 Dec 2023		
Machine Age	hrs	Client Info		100		
Oil Age	hrs	Client Info		100		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	2		
Lead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>200	2		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		5		
Calcium	ppm	ASTM D5185m		50		
Phosphorus	ppm	ASTM D5185m		376		
Zinc	ppm	ASTM D5185m		432		
Sulfur	ppm	ASTM D5185m		851		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4045		
Particles >6µm		ASTM D7647	>2500	1121		
Particles >14μm		ASTM D7647	>320	131		
Particles >21µm		ASTM D7647	>80	44		
Particles >38µm		ASTM D7647	>20	3		
Particles >71μm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/14		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.36		



# **OIL ANALYSIS REPORT**

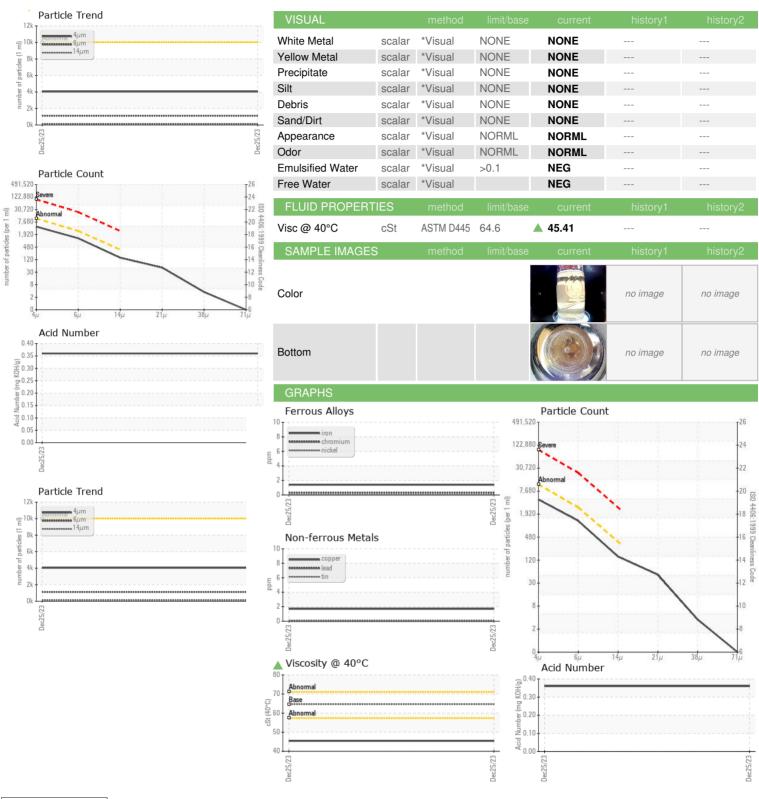





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0669861 : 06058724

: 10830106

Recieved : 11 Jan 2024 Diagnosed Diagnostician

: 16 Jan 2024 : Jonathan Hester

Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**TOM HELT - HELT DIVERSIFIED LLC** 

5846 BALTES RD WAUNAKEE, WI US 53597

Contact: SERVICE MANAGER

T: (608)334-3781 F: