

# **OIL ANALYSIS REPORT**

# KAESER SK 20 2966582 (S/N 1256)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 📥 Wear


The copper level is abnormal. All other component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

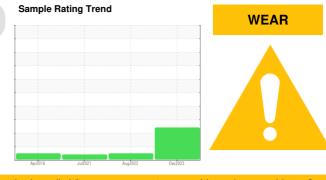

SAMPLE INFORM	<b>ATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005969	KCP50502	KCP41651
Sample Date		Client Info		01 Dec 2023	01 Aug 2022	08 Jul 2021
Machine Age	hrs	Client Info		24600	21724	18617
Oil Age	hrs	Client Info		0	4138	1062
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	5
Aluminum	ppm	ASTM D5185m	>10	2	2	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<u> </u>	6	15
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m	00	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	1	79	40
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m	-	20	3	3
Zinc	ppm	ASTM D5185m		0	45	43
Sulfur	ppm	ASTM D5185m		18553	18500	16372
CONTAMINANTS		method	limit/base	current	history1	
						history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m	00	0	8	13
Potassium	ppm	ASTM D5185m	>20	1	0	1
Water	%	ASTM D6304		0.009	0.029	0.015
ppm Water	ppm	ASTM D6304	>500	94	299.6	159.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1349	2109	
Particles >6µm		ASTM D7647		524	688	
Particles >14µm		ASTM D7647	>80	<u> </u>	78	
Particles >21µm		ASTM D7647		<u> </u>	21	
Particles >38µm		ASTM D7647	>4	<u> </u>	1	
Particles >71µm		ASTM D7647		1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 18/16/15	18/17/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.36	0.313

Acid Number (AN) mg KOH/g

0.34 0.36 0.313 Contact/Location: JIMMY COUCH - VAMTUS

Report Id: VAMTUS [WUSCAR] 06058740 (Generated: 01/14/2024 17:18:39) Rev: 1

Page 1 of 2



**OIL ANALYSIS REPORT** 

method

\*Visual

\*Visual

\*Visua

scalar

scalar

scalar

limit/base

NONE

NONE

NONE

current

NONE

NONE

NONE

LIGHT

NONE

NONE

NORML

NORML

NEG


NEG


VISUAL


White Metal


Yellow Metal

Precipitate



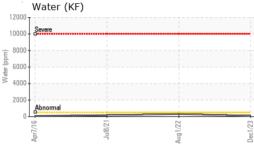



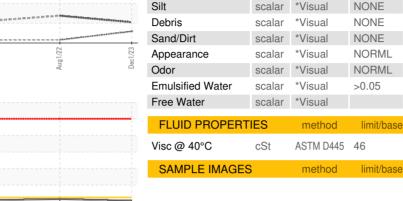



history1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

history2

NONE

NONE

NONE

NONE

A MODER

NONE

NORML


NORML

NEG

NEG

Bottom

Color

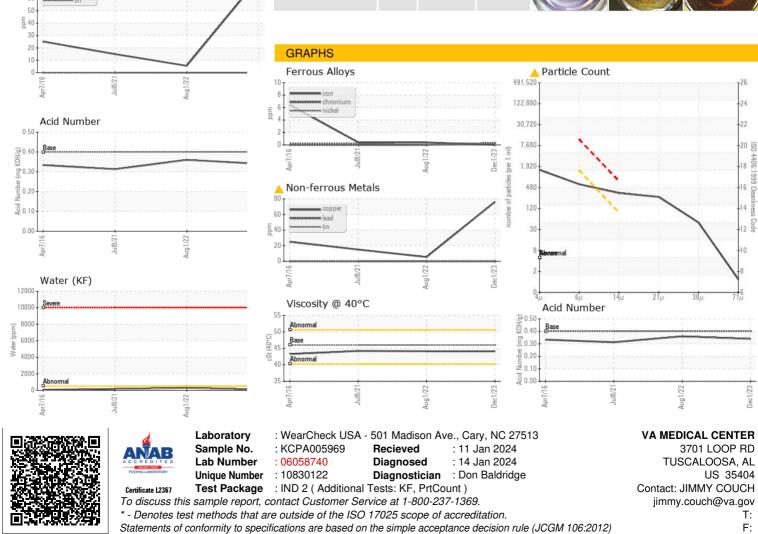

Contact/Location: JIMMY COUCH - VAMTUS