KAESER COMPRESSORS
Built for a lifetime.

# OIL ANALYSIS REPORT

Sample Rating Trend




ISO

Machine Id
## KAESER 7975796
Component
**Compressor**
Fluid
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

**▲ Recommendation**
No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

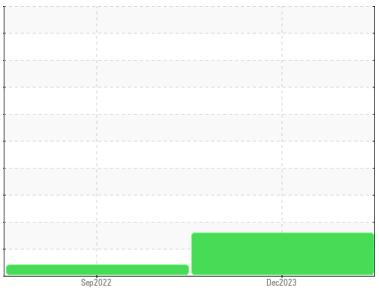**Wear**
All component wear rates are normal.

**▲ Contamination**
There is a moderate amount of particulates present in the oil.

**Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Sample Number | | Client Info | | **KCPA010852** | KCP50680 | --- |
| Sample Date | | Client Info | | **29 Dec 2023** | 07 Sep 2022 | --- |
| Machine Age | hrs | Client Info | | **7524** | 1389 | --- |
| Oil Age | hrs | Client Info | | **0** | 1389 | --- |
| Oil Changed | | Client Info | | **N/A** | Changed | --- |
| Sample Status | | | | **ATTENTION** | ABNORMAL | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Iron | ppm | ASTM D5185m | >50 | **<1** | <1 | --- |
| Chromium | ppm | ASTM D5185m | >10 | **<1** | 0 | --- |
| Nickel | ppm | ASTM D5185m | >3 | **0** | 0 | --- |
| Titanium | ppm | ASTM D5185m | >3 | **<1** | 0 | --- |
| Silver | ppm | ASTM D5185m | >2 | **0** | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >10 | **2** | <1 | --- |
| Lead | ppm | ASTM D5185m | >10 | **0** | 0 | --- |
| Copper | ppm | ASTM D5185m | >50 | **4** | 5 | --- |
| Tin | ppm | ASTM D5185m | >10 | **<1** | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | **0** | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | **0** | 0 | --- |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Boron | ppm | ASTM D5185m | 0 | **0** | 0 | --- |
| Barium | ppm | ASTM D5185m | 90 | **33** | 16 | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | **0** | 0 | --- |
| Manganese | ppm | ASTM D5185m | | **0** | <1 | --- |
| Magnesium | ppm | ASTM D5185m | 100 | **74** | 59 | --- |
| Calcium | ppm | ASTM D5185m | 0 | **<1** | 2 | --- |
| Phosphorus | ppm | ASTM D5185m | 0 | **20** | 2 | --- |
| Zinc | ppm | ASTM D5185m | 0 | **0** | 8 | --- |
| Sulfur | ppm | ASTM D5185m | 23500 | **22625** | 20259 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Silicon | ppm | ASTM D5185m | >25 | **<1** | <1 | --- |
| Sodium | ppm | ASTM D5185m | | **16** | 17 | --- |
| Potassium | ppm | ASTM D5185m | >20 | **3** | 1 | --- |
| Water | % | ASTM D6304 | >0.05 | **0.017** | 0.027 | --- |
| ppm Water | ppm | ASTM D6304 | >500 | **178** | 276.7 | --- |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Particles >4µm | | ASTM D7647 | | **6542** | --- | --- |
| Particles >6µm | | ASTM D7647 | >1300 | ▲ **2160** | --- | --- |
| Particles >14µm | | ASTM D7647 | >80 | ▲ **119** | --- | --- |
| Particles >21µm | | ASTM D7647 | >20 | ▲ **21** | --- | --- |
| Particles >38µm | | ASTM D7647 | >4 | **1** | --- | --- |
| Particles >71µm | | ASTM D7647 | >3 | **0** | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >--/17/13 | ▲ **20/18/14** | --- | --- |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | **0.34** | 0.27 | --- |

KAESER COMPRESSORS
Built for a lifetime.

# OIL ANALYSIS REPORT

Particle Trend




Water (KF)




Acid Number

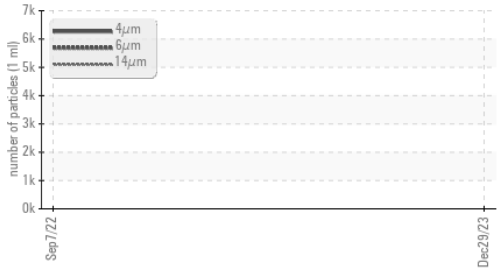


Water (KF)

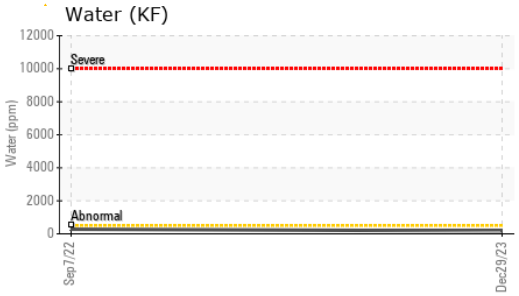


Viscosity @ 40°C

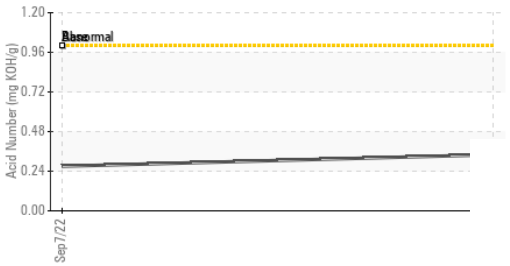


| VISUAL | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| White Metal | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Precipitate | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Silt | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Debris | scalar | *Visual | NONE | **NONE** | ▲ MODER | --- |
| Sand/Dirt | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Appearance | scalar | *Visual | NORML | **NORML** | NORML | --- |
| Odor | scalar | *Visual | NORML | **NORML** | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.05 | **NEG** | NEG | --- |
| Free Water | scalar | *Visual | | **NEG** | NEG | --- |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Visc @ 40°C | cSt | ASTM D445 | 45 | **48.6** | 44.4 | --- |
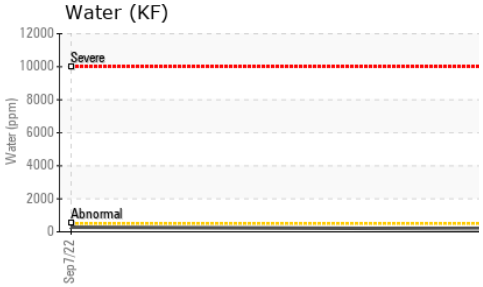
| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|
| Color | | |  |  | *no image* |
| Bottom | | |  |  | *no image* |

## GRAPHS

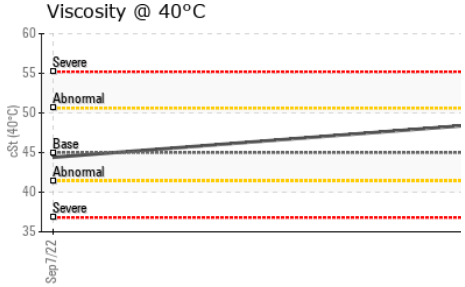Ferrous Alloys




Non-ferrous Metals




Viscosity @ 40°C

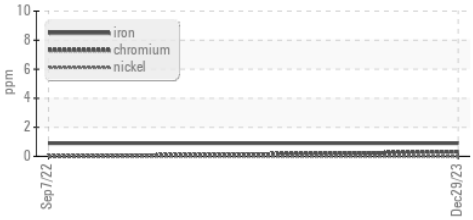


Particle Count

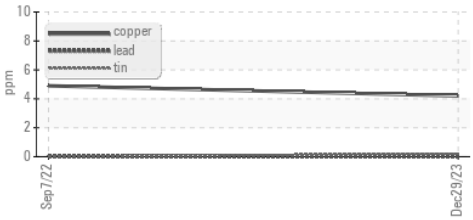


Acid Number


Certificate L2367

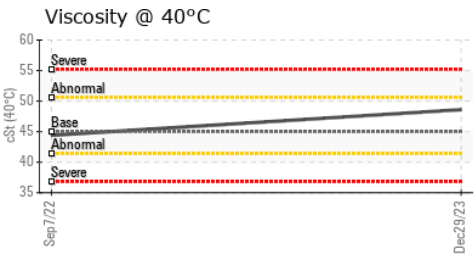**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513
**Sample No.** : KCPA010852 **Recieved** : 11 Jan 2024
**Lab Number** : 06058753 **Diagnosed** : 14 Jan 2024
**Unique Number** : 10830135 **Diagnostician** : Don Baldridge
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

*To discuss this sample report, contact Customer Service at 1-800-237-1369.*
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
*Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*

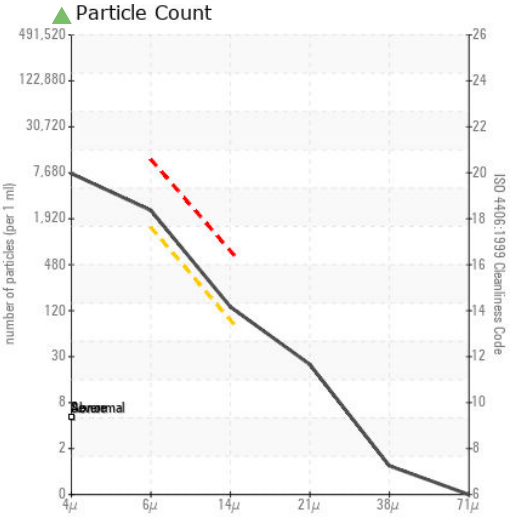**AMAZON.COM SERVICES LLC**
820 FEDERAL SCHOOL LN
NEW CASTLE, DE
US 19720
Contact: Service Manager
eldepell@amazon.com
T:
F: