

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SFC 18T 4204434 (S/N 1002) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2021	Dec2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009949	KCP28730	
Sample Date		Client Info		21 Dec 2023	23 Apr 2021	
Machine Age	hrs	Client Info		9924	4138	
Oil Age	hrs	Client Info		0	4138	
Oil Changed		Client Info		N/A	Changed	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m		۰ <1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum		ASTM D5185m		2	<1	
Lead	ppm	ASTM D5185m	>10 >10	2	<1	
	ppm					
Copper	ppm	ASTM D5185m		2	<1	
Tin	ppm	ASTM D5185m	>10	0	0	
Antimony	ppm	ASTM D5185m			4	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	18	
Barium	ppm	ASTM D5185m	90	0	22	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	90	81	81	
Calcium	ppm	ASTM D5185m	2	0	2	
Phosphorus	ppm	ASTM D5185m		21	6	
Zinc	ppm	ASTM D5185m		0	2	
Sulfur	ppm	ASTM D5185m		22866	17761	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	
Sodium	ppm	ASTM D5185m		16	23	
Potassium	ppm	ASTM D5185m	>20	4	4	
Water	%	ASTM D6304		0.034	0.031	
ppm Water	ppm	ASTM D6304	>500	347	313.2	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7922	5057	
Particles >6µm		ASTM D7647	>1300	936	▲ 1421	
Particles >14µm		ASTM D7647	>80	67	▲ 146	
Particles >21µm		ASTM D7647		21	▲ 44	
Particles >38µm		ASTM D7647	>4	2	2	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/17/13	▲ 18/14	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.358	
:53:06) Rev: 1				Contact/Loca	ation: OMAR GA	KUA - PATDI

Report Id: PATDIN [WUSCAR] 06058754 (Generated: 01/15/2024 19:53:06) Rev: 1

Contact/Location: OMAR GARCIA - PATDIN



OIL ANALYSIS REPORT

Recieved

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.


* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.


Diagnosed


: 11 Jan 2024

: 15 Jan 2024

Diagnostician : Jonathan Hester

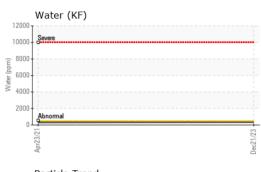

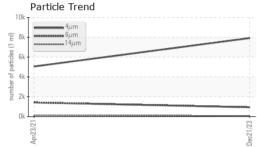

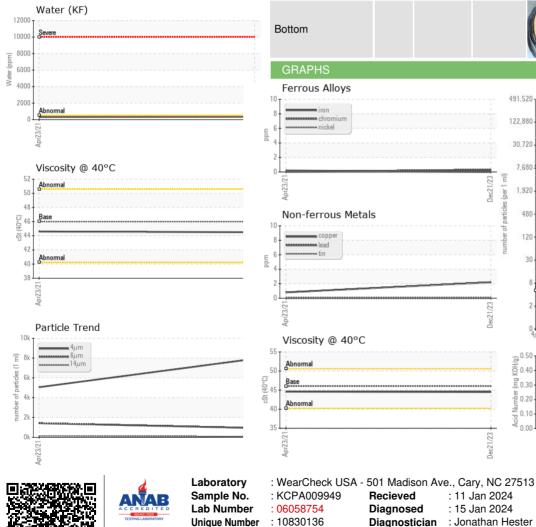

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.6	
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						no image
Bottom						no image
GRAPHS						
Ferrous Alloys			101 50	Particle Coun	t	20
iron			491,52	Ī		1 ²⁶
			122,88	D-		-24
			30,72			-22
			7,68			-20
Apr23/21			Dec21/23 (per 1 ml		,	-18
Non-ferrous Metal	c		비 왕 년 48		N	-16
			of par		•	
copper			Dec21/23.	0-		-20 -18 -16 -14
tin			E 3	-		-12
				B homen al		-10
1				Berme mal		
		*****	21/23	2-		-8
Apr23/21		*****	Dec21/23	- 4μ 6μ	14µ 21µ	-8 38µ 71µ
Viscosity @ 40°C			Dec21//	4μ Acid Number		
Viscosity @ 40°C			Dec21//	4μ Acid Number		
Viscosity @ 40°C Abnormal Base			Dec21//	4μ Acid Number		
Viscosity @ 40°C			Dec21//	4μ Acid Number		
Viscosity @ 40°C Abnormal Base Abnormal			(0.5) (0.400 (0.40) (0.400 (0.40) (0.100 (0.40) (0.100 (0.40) (0.100 (0.40) (0.40) (0.40) (0.5)(Acid Number		
Viscosity @ 40°C			Dec21/23 Dec21/23 Dec21/23 Dec21/23 Dec21/23 Dec21/23 Dec21/23 Dec21/23	Acid Number		



Certificate L2367

Contact/Location: OMAR GARCIA - PATDIN

omar.garcia@pattersoncompanies.com

DINUBA, CA

US 93618

T:

F:

PATTERSON LOGISTICS

800 MONTE VISTA DRIVE

Contact: OMAR GARCIA