




# OIL ANALYSIS REPORT

Sample Rating Trend

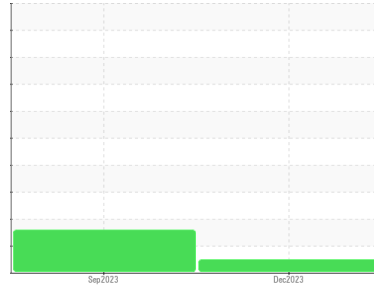

**NORMAL**



Machine Id  
**42320**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL0034276</b>	IL05967308	---
Sample Date	Client Info			<b>13 Dec 2023</b>	06 Sep 2023	---
Machine Age	mls	Client Info		<b>42690</b>	27233	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	1.4	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>19</b>	67	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	39	---
Lead	ppm	ASTM D5185m	>40	<b>4</b>	6	---
Copper	ppm	ASTM D5185m	>330	<b>8</b>	28	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	39	<b>26</b>	20	---
Barium	ppm	ASTM D5185m	1	<b>0</b>	1	---
Molybdenum	ppm	ASTM D5185m	49	<b>65</b>	66	---
Manganese	ppm	ASTM D5185m	1	<b>1</b>	6	---
Magnesium	ppm	ASTM D5185m	616	<b>793</b>	428	---
Calcium	ppm	ASTM D5185m	1554	<b>1408</b>	1682	---
Phosphorus	ppm	ASTM D5185m	899	<b>792</b>	962	---
Zinc	ppm	ASTM D5185m	1069	<b>1069</b>	1223	---
Sulfur	ppm	ASTM D5185m	2624	<b>2808</b>	3193	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>12</b>	▲ 42	---
Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>27</b>	128	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.2</b>	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.0</b>	25.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.4</b>	24.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	<b>6.1</b>	4.8	---







# OIL ANALYSIS REPORT

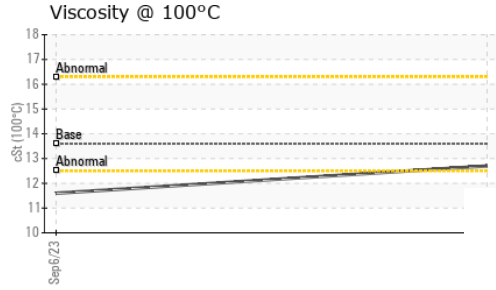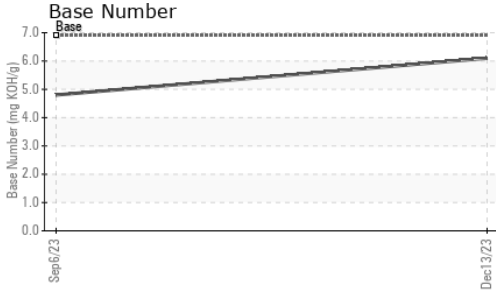

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	13.6	<b>12.7</b>	11.6	---

## GRAPHS

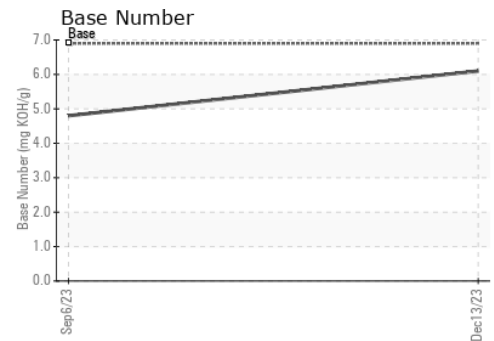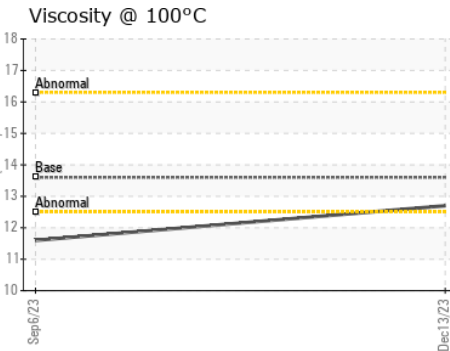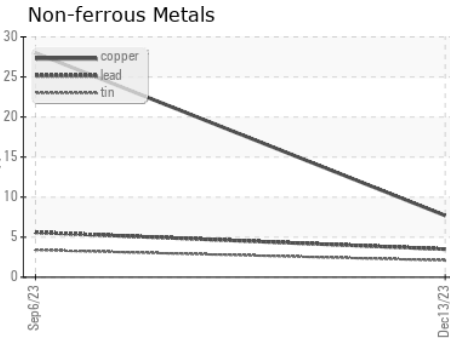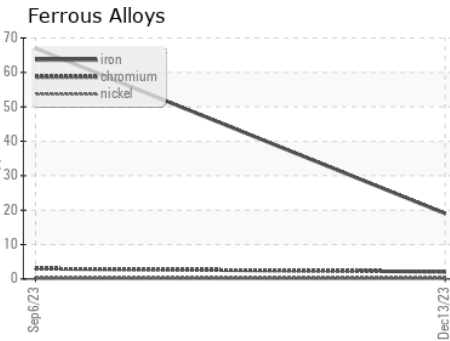

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0034276      **Received** : 12 Jan 2024  
**Lab Number** : 06058964      **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10830346      **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**TAMPA IDEALEASE**  
 5951 ORIENT ROAD  
 TAMPA, FL  
 US 33610-9565  
 Contact: Russ Cook  
 russcook@idealease.com  
 T: (813)626-9285  
 F: (844)270-1356

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)