

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area WP29 **MVR108-5** Effect

Component **Hydraulic System** MOBIL DTE 25 (93 GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0884096	WC0851319	WC0851316
Sample Date		Client Info		08 Jan 2024	18 Dec 2023	11 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	0
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	2	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	<1	0
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	1	1
Calcium	ppm	ASTM D5185m		43	45	43
Phosphorus	ppm	ASTM D5185m		334	341	315
Zinc	ppm	ASTM D5185m		481	508	484
Sulfur	ppm	ASTM D5185m		936	1029	924
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		1	0	2
Potassium	ppm	ASTM D5185m	>20	0	1	2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2239	866	703
Particles >6µm		ASTM D7647	>1300	525	181	102
Particles >14µm		ASTM D7647	>160	44	10	9
Particles >21µm		ASTM D7647	>40	10	4	3
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/13	17/15/10	17/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.54	0.55	0.53
3.25.52) Rev: 1				Cub	mittad By: VINC	


Report Id: LEPNEW [WUSCAR] 06059261 (Generated: 01/15/2024 13:25:52) Rev: 1


Submitted By: VINCENT MCINTIRE




OIL ANALYSIS REPORT

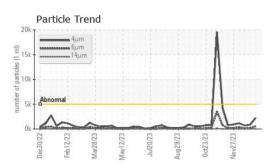

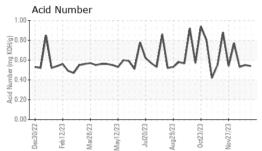


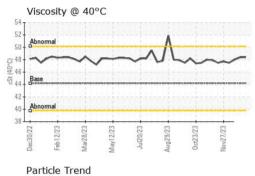



Ē

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	48.4	48.4	48.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

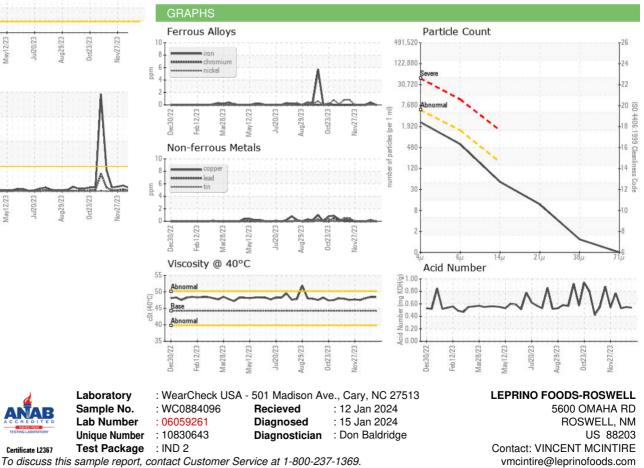

Report Id: LEPNEW [WUSCAR] 06059261 (Generated: 01/15/2024 13:25:52) Rev: 1

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Submitted By: VINCENT MCINTIRE

Page 2 of 2

T: (575)347-3261

F: (505)347-5728