




# OIL ANALYSIS REPORT

Sample Rating Trend

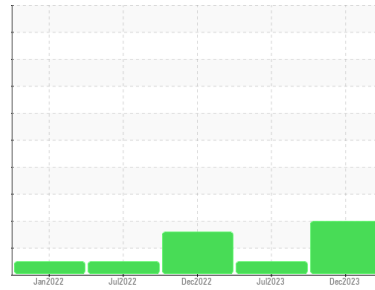

ISO



Machine Id  
**PRESS 19 (S/N 61026341)**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0004106</b>	KFS0004143	KFS0002356
Sample Date	Client Info	<b>27 Dec 2023</b>	12 Jul 2023	29 Dec 2022
Machine Age	hrs	<b>37859</b>	22141	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	<1	1
Calcium	ppm	ASTM D5185m	50	<b>30</b>	33	32
Phosphorus	ppm	ASTM D5185m	330	<b>331</b>	335	323
Zinc	ppm	ASTM D5185m	430	<b>385</b>	404	387
Sulfur	ppm	ASTM D5185m	760	<b>2489</b>	2886	2483

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1


## FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>1300	<b>▲ 2570</b>	1838	▲ 28939
Particles >6µm	ASTM D7647	>160	<b>▲ 615</b>	458	▲ 9443
Particles >14µm	ASTM D7647	>10	<b>▲ 40</b>	31	▲ 245
Particles >21µm	ASTM D7647	>3	<b>▲ 10</b>	8	13
Particles >38µm	ASTM D7647	>3	<b>0</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>17/14/10	<b>▲ 19/16/12</b>	18/16/12	▲ 22/20/15


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.50	<b>0.26</b>	0.27	0.28


### ▲ Particle Trend

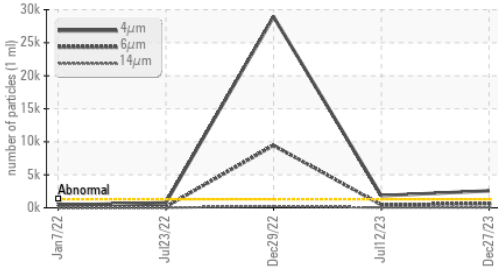


### ▲ Particle Trend

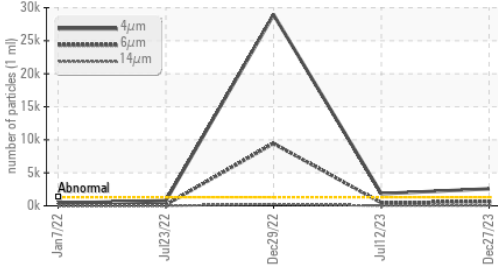

### Acid Number

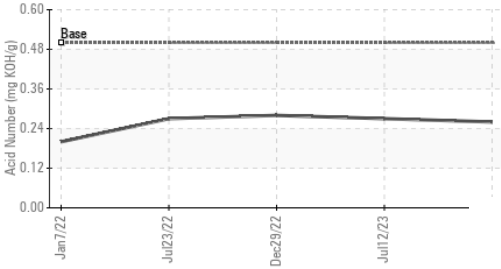


### Viscosity @ 40°C

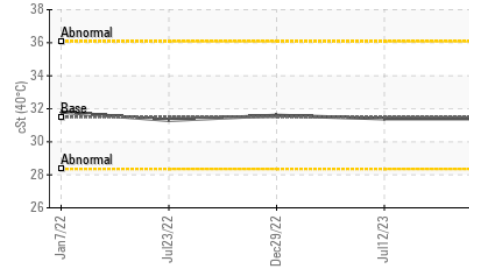

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5	31.4	31.6

### SAMPLE IMAGES

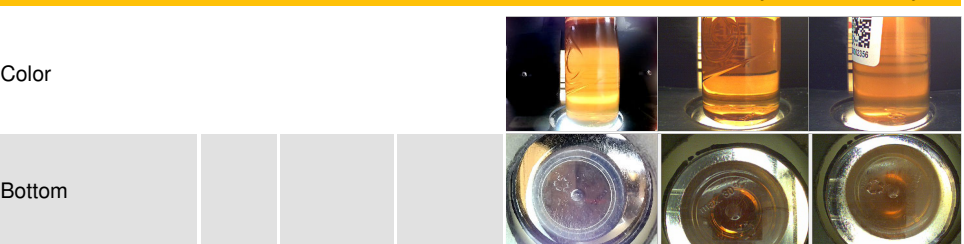


### GRAPHS


#### Ferrous Alloys

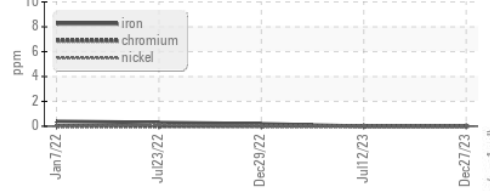


#### Non-ferrous Metals

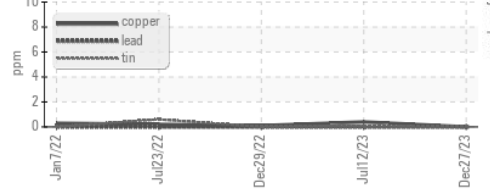


#### Viscosity @ 40°C

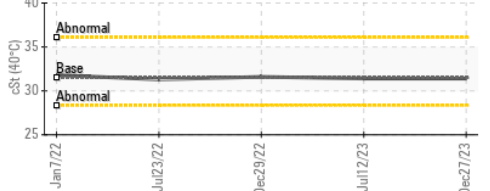

#### ▲ Particle Count

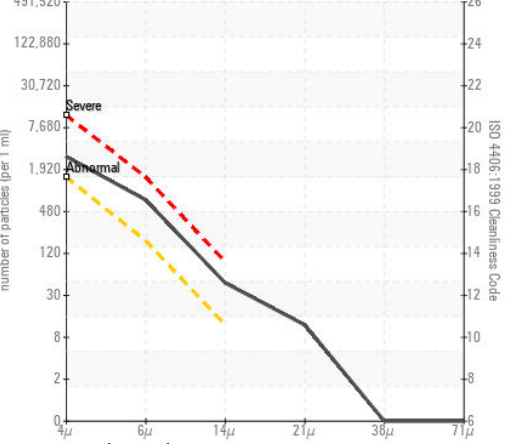

#### Acid Number

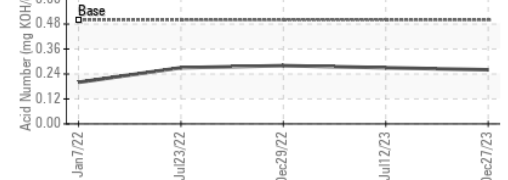

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0004106 **Received** : 12 Jan 2024  
**Lab Number** : 06059277 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10830659 **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**LUXIT LLC**  
 102 MAGNETI MARELLI DR  
 PULASKI, TN  
 US 38478  
 Contact: RONALD TRUETT  
 rtruett@luxitgroup.com  
 T: (931)371-3150  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)