




OIL ANALYSIS REPORT

Sample Rating Trend

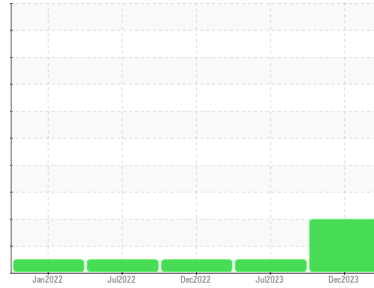

ISO



Machine Id
PRESS 04 (S/N 61015841)

Component
Hydraulic System

Fluid
CONOCO MEGAFLOW AW 46 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | KFS0004139 | KFS0004155 | KFS0002416 |
| Sample Date | Client Info | | | 27 Dec 2023 | 12 Jul 2023 | 29 Dec 2022 |
| Machine Age | hrs | Client Info | | 45169 | 44057 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | ABNORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.05 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|----------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Chromium | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >20 | 9 | 10 | 9 |
| Tin | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 1 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Calcium | ppm | ASTM D5185m | | 24 | 27 | 27 |
| Phosphorus | ppm | ASTM D5185m | | 373 | 372 | 363 |
| Zinc | ppm | ASTM D5185m | | 382 | 406 | 397 |
| Sulfur | ppm | ASTM D5185m | | 1068 | 1299 | 1058 |


| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >15 | 1 | 2 | 3 |
| Sodium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 1 | 1 |

| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-------------------|----------|----------|
| Particles >4µm | | ASTM D7647 | >1300 | ▲ 2649 | 2751 | 1054 |
| Particles >6µm | | ASTM D7647 | >160 | ▲ 497 | 548 | 189 |
| Particles >14µm | | ASTM D7647 | >10 | ▲ 48 | 34 | 18 |
| Particles >21µm | | ASTM D7647 | >3 | ▲ 17 | 8 | 5 |
| Particles >38µm | | ASTM D7647 | >3 | 1 | 0 | 1 |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >17/14/10 | ▲ 19/16/13 | 19/16/12 | 17/15/11 |


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.38 | 0.27 | 0.30 | 0.29 |

OIL ANALYSIS REPORT


▲ Particle Trend

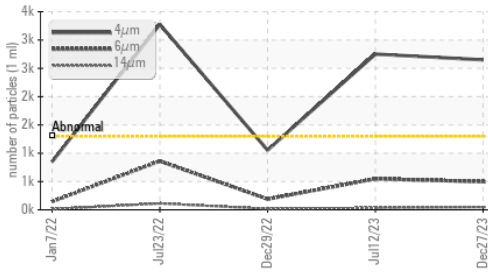


▲ Particle Trend

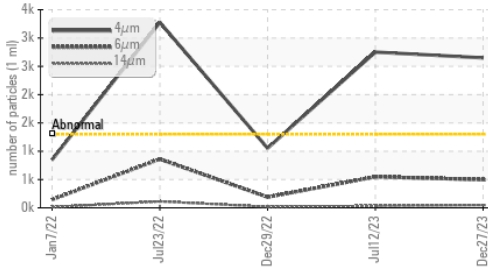

Acid Number

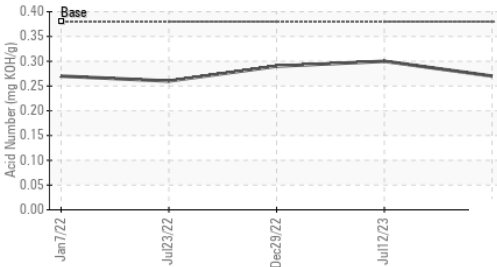

Viscosity @ 40°C

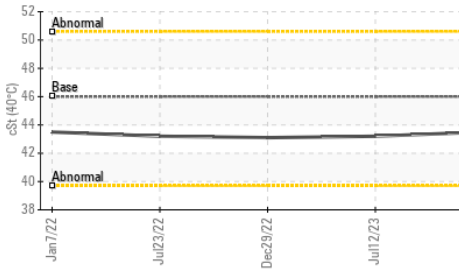

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 46 | 43.5 | 43.2 | 43.1 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

Color




Bottom




GRAPHS


Ferrous Alloys

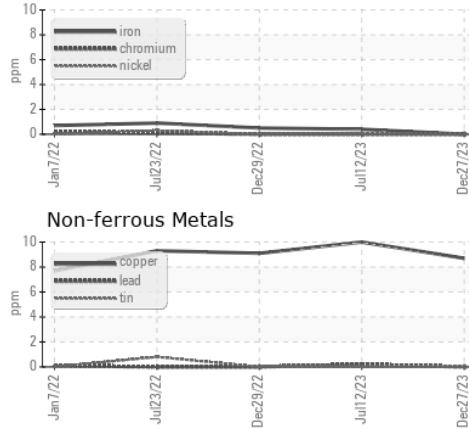


Non-ferrous Metals

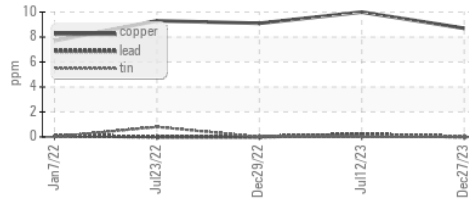


Viscosity @ 40°C

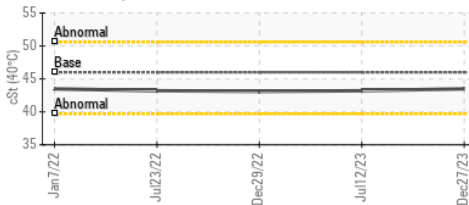

▲ Particle Count

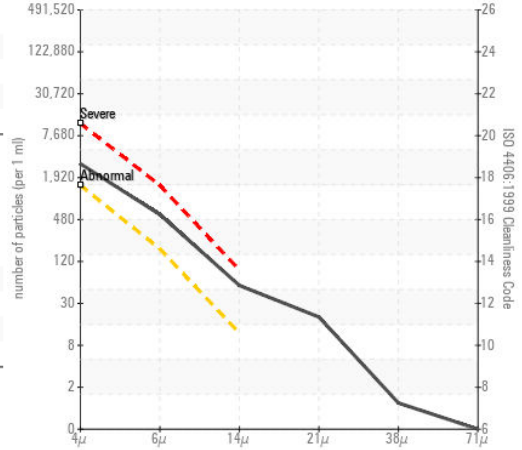

Acid Number

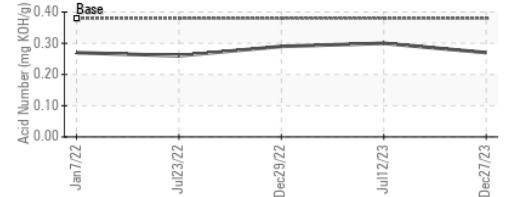

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KFS0004139 Recieved : 12 Jan 2024
 Lab Number : 06059287 Diagnosed : 15 Jan 2024
 Unique Number : 10830669 Diagnostician : Wes Davis
 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LUXIT LLC
 102 MAGNETI MARELLI DR
 PULASKI, TN
 US 38478
 Contact: RONALD TRUETT
 rtruett@luxitgroup.com
 T: (931)371-3150
 F: